

CK2,5-ED-0,5BU CUNI - Crimp contact



1585757

<https://www.phoenixcontact.com/sg/products/1585757>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Crimp contact, contact diameter: 2.5 mm, turned, Socket, contact material: Copper-nickel (constants), connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

Commercial data

Item number	1585757
Packing unit	25 pc
Minimum order quantity	25 pc
Sales key	0204*
Product key	BF7AID
Catalog page	Page 668 (C-2-2019)
GTIN	4046356308250
Weight per piece (including packing)	1.61 g
Weight per piece (excluding packing)	1.5 g
Customs tariff number	85366990
Country of origin	DE

CK2,5-ED-0,5BU CUNI - Crimp contact



1585757

<https://www.phoenixcontact.com/sg/products/1585757>

Technical data

Notes

General	For HC-M-06, HC-M-HV, HC-M-08, HC-A, HC-BB, HC-B and HC-HV contact inserts, the quality of a crimp connection is determined by the DIN EN 60 352-2
---------	--

Product properties

Product type	Thermal contact
Type	Individual female contact
Contact material type	turned
Series	HC-M-06; HC-M-HV; HC-M-08; HC-A; HC-BB; HC-B; HC-HV


Electrical properties

Rated current	16 A
---------------	------

Connection data

Connection method	Crimp connection
-------------------	------------------

Dimensions

Dimensional drawing	
Width	4.5 mm
Height	4.5 mm
Depth	22.2 mm

Mechanical characteristics

Contact diameter	2.5 mm
------------------	--------

Material specifications

Contact material	Copper-nickel (constants)
------------------	---------------------------

Cable/line

Stripping length of the individual wire	7.5 mm (9.5 mm at HC-M-HV...)
---	-------------------------------

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

CK2,5-ED-0,5BU CUNI - Crimp contact



1585757

<https://www.phoenixcontact.com/sg/products/1585757>

Mounting

Assembly instructions

The quality of a crimp connection is determined by DIN EN 60352-2.

CK2,5-ED-0,5BU CUNI - Crimp contact


1585757

<https://www.phoenixcontact.com/sg/products/1585757>



Drawings

Dimensional drawing

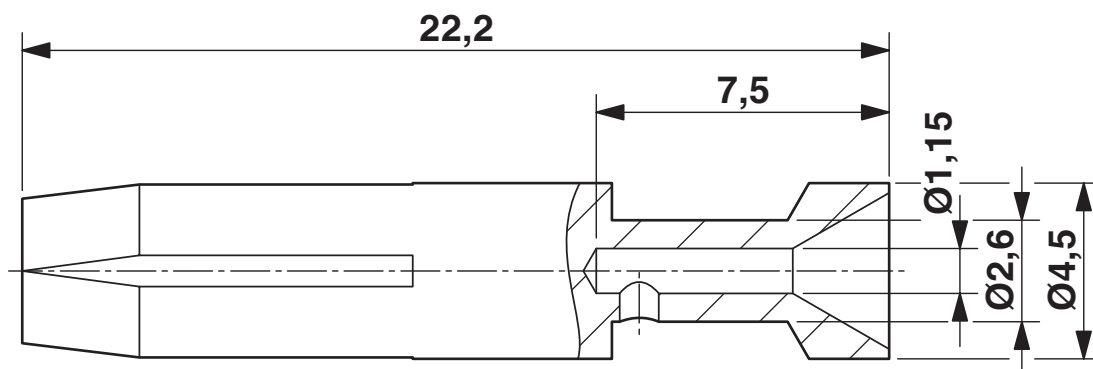

Dimensional drawing

CK2,5-ED-0,5BU CUNI - Crimp contact



1585757

<https://www.phoenixcontact.com/sg/products/1585757>

Classifications

ECLASS

ECLASS-11.0	27440204
ECLASS-12.0	27440204
ECLASS-13.0	27440204

ETIM

ETIM 9.0	EC000796
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

CK2,5-ED-0,5BU CUNI - Crimp contact



1585757

<https://www.phoenixcontact.com/sg/products/1585757>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT SEA Pte. Ltd.
105 Eunos Avenue 3, #04-00
Singapore 409836
+65 6228 4900
marketing@phoenixcontact.com.sg