

# CK4,0-ED-10,00ST AG - Crimp contact



1586198

<https://www.phoenixcontact.com/us/products/1586198>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 10 mm<sup>2</sup> ... 10 mm<sup>2</sup>, AWG 8

## Commercial data

Item number	1586198
Packing unit	25 pc
Minimum order quantity	25 pc
Sales key	BF65
Product key	BF7AIE
Catalog page	Page 511 (C-2-2019)
GTIN	4046356360234
Weight per piece (including packing)	3.116 g
Weight per piece (excluding packing)	3.06 g
Customs tariff number	85369010
Country of origin	CN

# CK4,0-ED-10,00ST AG - Crimp contact



1586198

<https://www.phoenixcontact.com/us/products/1586198>

## Technical data

### Notes

General	for HC-M-02, HC-M-03, HC-M-03/04, HC-M-04, HC-Q02, HC-Q03, HC-Q04, and HC-COM-Q4/2 contact carriers
---------	---

### Mounting

Assembly note	The quality of a crimp connection is determined by DIN EN 60352-2.
---------------	--

### Product properties

Product type	Crimp contact
Series	HC-M-03
	HC-M-03/04
	HC-M-04
	HC-K
	HC-M-02
	HC-HS
Type	Individual male contact
Contact material type	turned

### Connection data

Connection method	Crimp connection
Contact connection type	Pin
Connection technology	Crimp connection
Conductor cross section	10 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Connection cross section AWG	8
Stripping length of the individual wire	18 mm (For wire Ø ≥ 6.4 mm)
	15 mm (For wire Ø ≥ 4.3 mm)
Conductor cross section flexible	10 mm <sup>2</sup> ... 10 mm <sup>2</sup>

### Material specifications

Contact material	Copper alloy
Contact surface material	silver-plated

### Dimensions

Mechanical characteristics	
Contact diameter	4 mm

### Mechanical properties

Mechanical data	
Insertion/withdrawal cycles	≥ 500

### Environmental and real-life conditions

# CK4,0-ED-10,00ST AG - Crimp contact



1586198

<https://www.phoenixcontact.com/us/products/1586198>

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------


# CK4,0-ED-10,00ST AG - Crimp contact

1586198

<https://www.phoenixcontact.com/us/products/1586198>



## Drawings

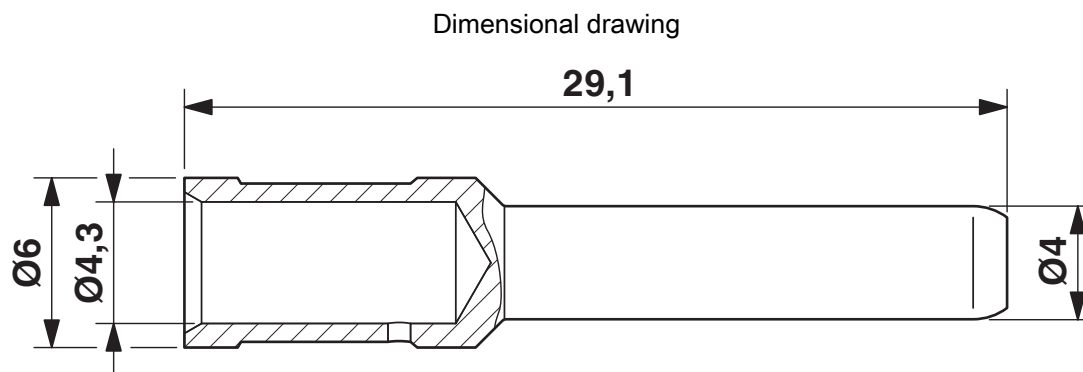

# CK4,0-ED-10,00ST AG - Crimp contact



1586198

<https://www.phoenixcontact.com/us/products/1586198>

## Classifications

### ECLASS

ECLASS-11.0	27440204
ECLASS-12.0	27440204
ECLASS-13.0	27440204

### ETIM

ETIM 9.0	EC000796
----------	----------

### UNSPSC

UNSPSC 21.0	39121500
-------------	----------

# CK4,0-ED-10,00ST AG - Crimp contact



1586198

<https://www.phoenixcontact.com/us/products/1586198>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)