

1593525

https://www.phoenixcontact.com/us/products/1593525

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, M23, number of positions: 6, contact connection type: Pin, Crimp connection, series: NC, RC, RM, TU, UC, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240381

Commercial data

| Item number | 1593525 |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB31 |
| Product key | ABRAFU |
| GTIN | 4046356196659 |
| Weight per piece (including packing) | 10.9 g |
| Weight per piece (excluding packing) | 4.71 g |
| Customs tariff number | 85389099 |
| Country of origin | DE |



1593525

https://www.phoenixcontact.com/us/products/1593525

Technical data

Product properties

| Product type | Contact insert |
|---------------------|----------------|
| Series | NC |
| | RC |
| | RM |
| | TU |
| | UC |
| Application | Signal |
| Number of positions | 6 |
| Connection profile | 6 |
| Coding | N |
| Thread type | M23 |

Electrical properties

Contact

| Contact diameter | 2 mm |
|--------------------------------|---------------------|
| Min. cross section | 1.5 mm ² |
| Max. cross section | 2.5 mm ² |
| Max. current | 20 A |
| Nominal voltage U _N | 48 V AC 74 V DC |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Rated surge voltage | 1.5 kV |

Connection data

| Connection method | Crimp connection |
|-------------------|------------------|
|-------------------|------------------|

Material specifications

| Insulator material | PA66 |
|--------------------|-----------------------------|
| Contact material | CuZn |
| Contact surface | Nickel-plated, gold coating |

Connector

Mechanical properties

Mechanical data

| West and add | |
|-----------------------------|----|
| Insertion/withdrawal cycles | 50 |

Environmental and real-life conditions



1593525

https://www.phoenixcontact.com/us/products/1593525

Ambient conditions

| Ambient temperature (storage/transport) | 15 °C 25 °C |
|--|-------------|
| Permissible humidity (storage/transport) | 50 % 65 % |




https://www.phoenixcontact.com/us/products/1593525



Drawings

Schematic diagram

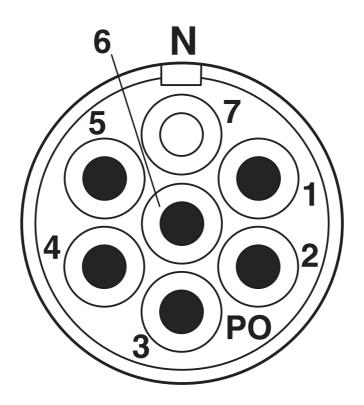


Connector pin assignment



https://www.phoenixcontact.com/us/products/1593525



Schematic diagram

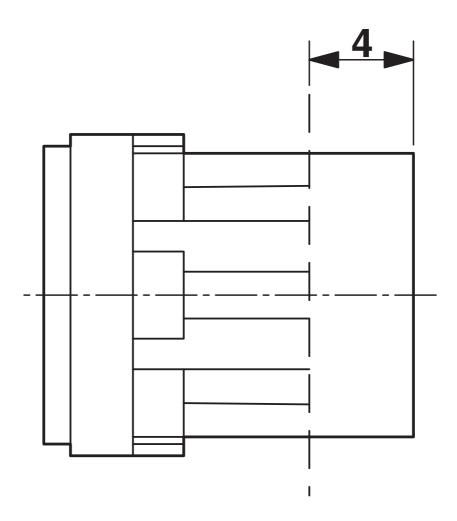

Technical drawings can be found under Downloads



1593525

https://www.phoenixcontact.com/us/products/1593525

Classifications

UNSPSC 21.0

ECLASS

| EC | CLASS-11.0 | 27440223 |
|------|------------|----------|
| EC | CLASS-12.0 | 27440223 |
| EC | CLASS-13.0 | 27440223 |
| ETIM | | |
| ET | TIM 8.0 | EC003557 |
| UNSP | SC | |

39121400



1593525

https://www.phoenixcontact.com/us/products/1593525

Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes |
|---|---|
| Exemption | 6(c) |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | de69c023-58cc-471a-a4c2-ba7811aca277 |

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com