

# RC-06S1N12Z500 - Cable connector



1593993

<https://www.phoenixcontact.com/pc/products/1593993>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: RC, angled, shielded: no, Screw locking mechanism, No. of pos.: 6, Direction of rotation: Standard, contact connection type: Socket, Solder cup, cable diameter range: 6 mm ... 10 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240434

## Commercial data

Item number	1593993
Packing unit	8 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAFC
GTIN	4046356199018
Weight per piece (including packing)	153.26 g
Weight per piece (excluding packing)	144.48 g
Customs tariff number	85366990
Country of origin	DE

# RC-06S1N12Z500 - Cable connector



1593993

<https://www.phoenixcontact.com/pc/products/1593993>

## Technical data

### Product properties

Product type	Circular connector (cable-side)
Thread type	M23

### Material specifications

Flammability rating according to UL 94	V0
--	----

### Connection data

#### Conductor connection

Connection method	Solder connection
-------------------	-------------------

### Connector

#### Insulating body

Coding	N
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	6
Direction of rotation	Standard
Connection profile	6
Contact diameter	2 mm
Litz wire cross-section	0.08 mm <sup>2</sup>
Litz wire cross-section	2.5 mm <sup>2</sup>
Rated current	20 A
Rated voltage	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

#### Housing

Housing material	Metal
Type of locking	Screw locking mechanism
Pg screw connection	Pg9
Degree of protection (plugged in)	IP65 IP67
Thread type	M23

#### Seal

# RC-06S1N12Z500 - Cable connector



1593993

<https://www.phoenixcontact.com/pc/products/1593993>

External cable diameter	6 mm ... 10 mm
-------------------------	----------------

## Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP67

# RC-06S1N12Z500 - Cable connector


1593993

<https://www.phoenixcontact.com/pc/products/1593993>



## Drawings

Schematic diagram

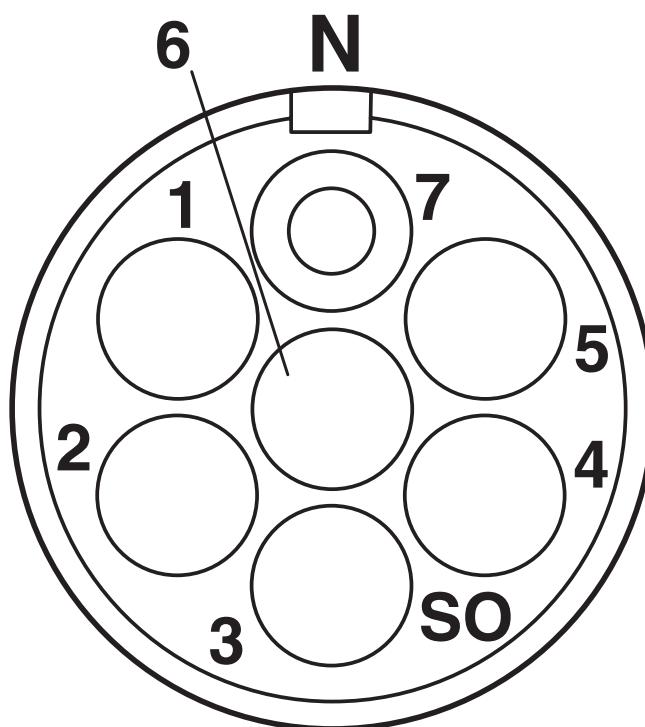

Connector pin assignment

# RC-06S1N12Z500 - Cable connector



1593993

<https://www.phoenixcontact.com/pc/products/1593993>

## Classifications

### ECLASS

ECLASS-11.0	27440109
ECLASS-12.0	27440109
ECLASS-13.0	27440109

### ETIM

ETIM 8.0	EC003569
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# RC-06S1N12Z500 - Cable connector



1593993

<https://www.phoenixcontact.com/pc/products/1593993>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b68651e4-1c45-4beb-8ebd-df566ab336ec

# RC-06S1N12Z500 - Cable connector

1593993

<https://www.phoenixcontact.com/pc/products/1593993>



## Accessories

### PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/pc/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)