

# RC-12P1N8A1L00 - Crimp contact

1597479

<https://www.phoenixcontact.com/pc/products/1597479>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Crimp contact, series: RC, straight, shielded: no, Screw locking mechanism, No. of pos.: 12, Direction of rotation: Standard, contact connection type: Pin, Crimp connection, cable diameter range: 9 mm ... 13 mm, coding: N

## Commercial data

Item number	1597479
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAFA
GTIN	4046356216265
Weight per piece (including packing)	98.23 g
Weight per piece (excluding packing)	93.06 g
Customs tariff number	85366990
Country of origin	DE

# RC-12P1N8A1L00 - Crimp contact



1597479

<https://www.phoenixcontact.com/pc/products/1597479>

## Technical data

### Notes

General	Order crimp contacts Ø 1 mm separately
---------	--

### Product properties

Product type	Circular connector (cable-side)
Type of the screw connection	IP68 screw
Thread type	M23

### Material specifications

Flammability rating according to UL 94	V0
Housing material	Metal

### Connection data

#### Conductor connection

Connection method	Solder connection
-------------------	-------------------

### Mechanical properties

#### Mechanical data

Type of the screw connection	IP68 screw
------------------------------	------------

### Connector

#### Insulating body

Note	Order information: Order crimp contacts Ø 1 mm separately
Coding	N
Connection method	Crimp connection
Contact switching type	Pin
Application	Signal
Number of positions	12
Direction of rotation	Standard
Connection profile	12
Contact diameter	1 mm
Rated current	8 A
Rated voltage	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

#### Housing

Housing material	Metal
------------------	-------

# RC-12P1N8A1L00 - Crimp contact



1597479

<https://www.phoenixcontact.com/pc/products/1597479>

Type of locking	Screw locking mechanism
Pg screw connection	none
Degree of protection (plugged in)	IP65
	IP67
Thread type	M23

Seal

External cable diameter	9 mm ... 13 mm
-------------------------	----------------

## Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
----------------------	------

# RC-12P1N8A1L00 - Crimp contact


1597479

<https://www.phoenixcontact.com/pc/products/1597479>



## Drawings

Schematic diagram

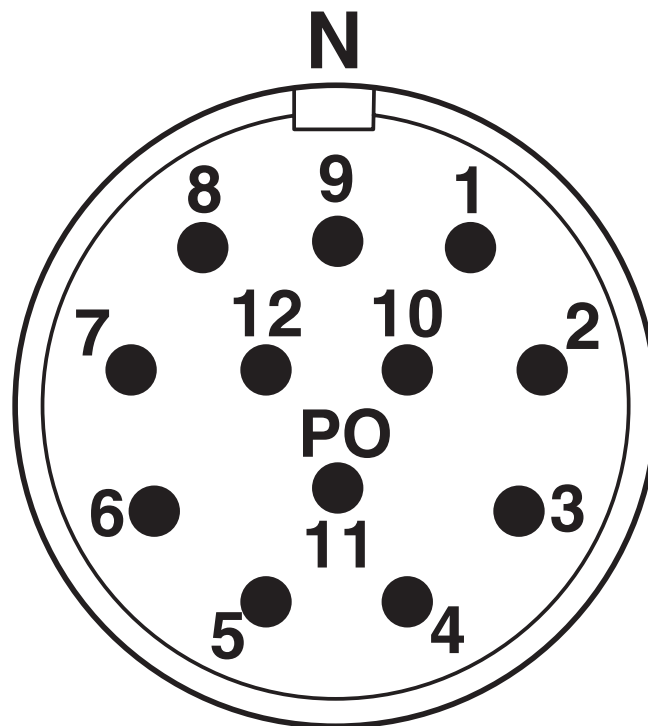

Connector pin assignment

# RC-12P1N8A1L00 - Crimp contact



1597479

<https://www.phoenixcontact.com/pc/products/1597479>

## Classifications

### ECLASS

ECLASS-11.0	27440109
-------------	----------

### ETIM

ETIM 8.0	EC003569
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# RC-12P1N8A1L00 - Crimp contact

1597479

<https://www.phoenixcontact.com/pc/products/1597479>



## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

# RC-12P1N8A1L00 - Crimp contact

1597479

<https://www.phoenixcontact.com/pc/products/1597479>



## Accessories

### RC-11P2000 - Crimp contact

1596770

<https://www.phoenixcontact.com/pc/products/1596770>



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240882

---

### RC-12P2000 - Crimp contact

1597862

<https://www.phoenixcontact.com/pc/products/1597862>



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range: 0.14 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1240882

## RC-12P1N8A1L00 - Crimp contact

1597479

<https://www.phoenixcontact.com/pc/products/1597479>



## RC-1KP2000 - Crimp contact

1602996

<https://www.phoenixcontact.com/pc/products/1602996>



Crimp contact, Pin, turned, Single contact, contact diameter: 1 mm, crimp range: 0.5 mm<sup>2</sup> ... 1 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241571

---

## RC-22P2000 - Crimp contact

1603321

<https://www.phoenixcontact.com/pc/products/1603321>



Crimp contact, Pin, rolled, Single contact, contact diameter: 1 mm, crimp range: 0.22 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Single contact, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)



## RC-12P1N8A1L00 - Crimp contact

1597479

<https://www.phoenixcontact.com/pc/products/1597479>



## RC-22P2300 - Crimp contact

1603324

<https://www.phoenixcontact.com/pc/products/1603324>



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range: 0.22 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

---

## RC-22P2400 - Crimp contact

1603325

<https://www.phoenixcontact.com/pc/products/1603325>



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range: 0.22 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

## RC-12P1N8A1L00 - Crimp contact

1597479

<https://www.phoenixcontact.com/pc/products/1597479>



## RC-21P2000 - Crimp contact

1603310

<https://www.phoenixcontact.com/pc/products/1603310>



Crimp contact, Pin, rolled, Single contact, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>, Single contact

## RC-21P2300 - Crimp contact

1603313

<https://www.phoenixcontact.com/pc/products/1603313>



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>

# RC-12P1N8A1L00 - Crimp contact

1597479

<https://www.phoenixcontact.com/pc/products/1597479>



## RC-21P2400 - Crimp contact

1611637

<https://www.phoenixcontact.com/pc/products/1611637>



Crimp contact, Pin, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)