

# RC-12S1N8A1L00 - Cable connector



1599155

<https://www.phoenixcontact.com/pc/products/1599155>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: RC, straight, shielded: no, Screw locking mechanism, No. of pos.: 12, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, cable diameter range: 9 mm ... 13 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241045

## Commercial data

Item number	1599155
Packing unit	20 pc
Minimum order quantity	1 pc
Product key	ABRAFA
GTIN	4046356224307
Weight per piece (including packing)	98.88 g
Weight per piece (excluding packing)	98.88 g
Customs tariff number	85366990
Country of origin	DE

# RC-12S1N8A1L00 - Cable connector



1599155

<https://www.phoenixcontact.com/pc/products/1599155>

## Technical data

### Notes

General	Order crimp contacts Ø 1 mm separately
---------	--

### Product properties

Product type	Circular connector (cable-side)
Type of the screw connection	IP68 screw
Thread type	M23

### Material specifications

Flammability rating according to UL 94	V0
--	----

### Connection data

#### Conductor connection

Connection method	Solder connection
-------------------	-------------------

### Mechanical properties

#### Mechanical data

Type of the screw connection	IP68 screw
------------------------------	------------

### Connector

#### Insulating body

Note	Order information: Order crimp contacts Ø 1 mm separately
Coding	N
Connection method	Crimp connection
Contact switching type	Socket
Application	Signal
Number of positions	12
Direction of rotation	Standard
Connection profile	12
Contact diameter	1 mm
Power contacts	
Rated current	8 A
Rated voltage	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

#### Housing

Housing material	Metal
Type of locking	Screw locking mechanism

# RC-12S1N8A1L00 - Cable connector



1599155

<https://www.phoenixcontact.com/pc/products/1599155>

Pg screw connection	none
Degree of protection (plugged in)	IP65
	IP67
Thread type	M23
Seal	
External cable diameter	9 mm ... 13 mm

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67
Ambient temperature (storage/transport)	15 °C ... 25 °C
Permissible humidity (storage/transport)	50 % ... 65 %

# RC-12S1N8A1L00 - Cable connector


1599155

<https://www.phoenixcontact.com/pc/products/1599155>



## Drawings

Schematic diagram

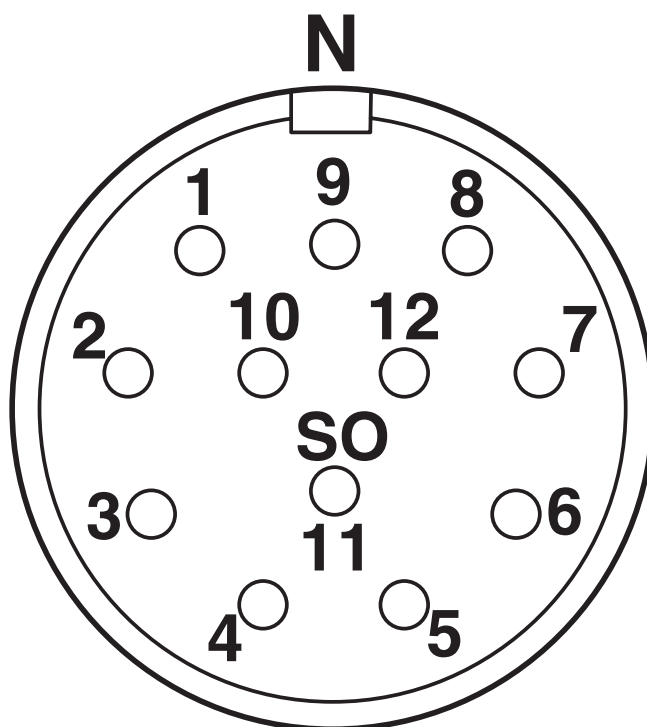

Connector pin assignment

# RC-12S1N8A1L00 - Cable connector



1599155

<https://www.phoenixcontact.com/pc/products/1599155>

## Classifications

### ECLASS

ECLASS-11.0	27440109
ECLASS-12.0	27440109
ECLASS-13.0	27440109

### ETIM

ETIM 8.0	EC003569
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# RC-12S1N8A1L00 - Cable connector



1599155

<https://www.phoenixcontact.com/pc/products/1599155>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	d3a7aec8-6280-4147-892e-54e8c78021f9

# RC-12S1N8A1L00 - Cable connector

1599155

<https://www.phoenixcontact.com/pc/products/1599155>



## Accessories

### PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/pc/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

---

### RC-11S2000 - Crimp contact

1596772

<https://www.phoenixcontact.com/pc/products/1596772>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241093

## RC-12S1N8A1L00 - Cable connector

1599155

<https://www.phoenixcontact.com/pc/products/1599155>



### RC-12S2000 - Crimp contact

1599600

<https://www.phoenixcontact.com/pc/products/1599600>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.14 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241093

---

### RC-1KS2000 - Crimp contact

1602998

<https://www.phoenixcontact.com/pc/products/1602998>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.5 mm<sup>2</sup> ... 1 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241572



# RC-12S1N8A1L00 - Cable connector



1599155

<https://www.phoenixcontact.com/pc/products/1599155>

## RC-22S2000 - Crimp contact

1603327

<https://www.phoenixcontact.com/pc/products/1603327>



Crimp contact, Socket, rolled, Single contact, contact diameter: 1 mm, crimp range: 0.22 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Single contact, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

---

## RC-21S2000 - Crimp contact

1603315

<https://www.phoenixcontact.com/pc/products/1603315>



Crimp contact, Socket, rolled, Single contact, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>, Single contact

# RC-12S1N8A1L00 - Cable connector



1599155

<https://www.phoenixcontact.com/pc/products/1599155>

## RC-22S2300 - Crimp contact

1603330

<https://www.phoenixcontact.com/pc/products/1603330>



Crimp contact, Socket, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range: 0.22 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

---

## RC-22S2400 - Crimp contact

1603332

<https://www.phoenixcontact.com/pc/products/1603332>



Crimp contact, Socket, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range: 0.22 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

# RC-12S1N8A1L00 - Cable connector

1599155

<https://www.phoenixcontact.com/pc/products/1599155>



## RC-21S2300 - Crimp contact

1603318

<https://www.phoenixcontact.com/pc/products/1603318>



Crimp contact, Socket, rolled, Taped product, number of pieces per reel: 500, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>

## RC-21S2400 - Crimp contact

1616500

<https://www.phoenixcontact.com/pc/products/1616500>



Crimp contact, Socket, rolled, Taped product, number of pieces per reel: 10000, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)