

HC-B 16-ESTQ-2,5 - Contact insert



1605637

<https://www.phoenixcontact.com/in/products/1605637>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 16+PE, size: B16, number of connections per position: 1, Pin, QUICKON connection, 500 V, 16 A, 0.34 mm² ... 2.5 mm²

Product description

Contact insert
With QUICKON connection technology, the wires are connected with just a turn of the screwdriver. The wires do not have to be stripped first. This reduces connection time by at least 60%.

Commercial data

Item number	1605637
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BF7
Product key	BF7ABC
Catalog page	Page 545 (C-2-2019)
GTIN	4017918940720
Weight per piece (including packing)	91.35 g
Weight per piece (excluding packing)	90.46 g
Customs tariff number	85366990
Country of origin	PL

HC-B 16-ESTQ-2,5 - Contact insert

1605637

<https://www.phoenixcontact.com/in/products/1605637>



Technical data

Notes

General	Connectors may be operated only when there is no load/voltage.
---------	--

Mounting

Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required
-----------------------	---


Product properties

Type	B16 B32
Product type	Contact insert with a fixed no. of positions
Number of positions	16
Connection profile	16+PE
Contact numbering	1 - 16
Number of connections per position	1
Contact material type	rolled
Series	HC-B

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	34 mm
Height	35 mm
Length	84.5 mm
Drill hole distance, horizontal	77.5 mm
Drill hole distance, vertical	27 mm

Mechanical characteristics

Contact diameter	2.5 mm
------------------	--------

Connection data

Connection technology

Connection technology	QUICKON connection
Number of connections per position	1

Conductor connection

HC-B 16-ESTQ-2,5 - Contact insert



1605637

<https://www.phoenixcontact.com/in/products/1605637>

Conductor cross section	0.34 mm² ... 2.5 mm² (Litz wire structure VDE 0295, Class 1 - 5/litz wire diameter $\geq$ 0.2 mm)
Connection cross section AWG	22 ... 14
Tightening torque	0.8 Nm ... 1.2 Nm (PE connection)
	0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)

Electrical properties

Rated voltage (III/3)	500 V
	500 V
Rated surge voltage	6 kV
	6 kV
Rated current	16 A
	16 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	$\geq$ 500
-----------------------------	------------

Material specifications

Material Wire insulation	PVC / PE
Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PA
Standards/regulations	PA: Fire protection in rail vehicles - requirement sets R22 and R23 acc. to DIN EN 45545-2 (Risk level HL1 - HL2)
	PA: Fire protection in rail vehicles - requirement set R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
Ambient temperature (assembly)	-25 °C ... 50 °C

Standards and regulations

Testing

Standards/regulations	PA: Fire protection in rail vehicles - requirement sets R22 and R23 acc. to DIN EN 45545-2 (Risk level HL1 - HL2)
	PA: Fire protection in rail vehicles - requirement set R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

HC-B 16-ESTQ-2,5 - Contact insert


1605637

<https://www.phoenixcontact.com/in/products/1605637>




Drawings

Dimensional drawing

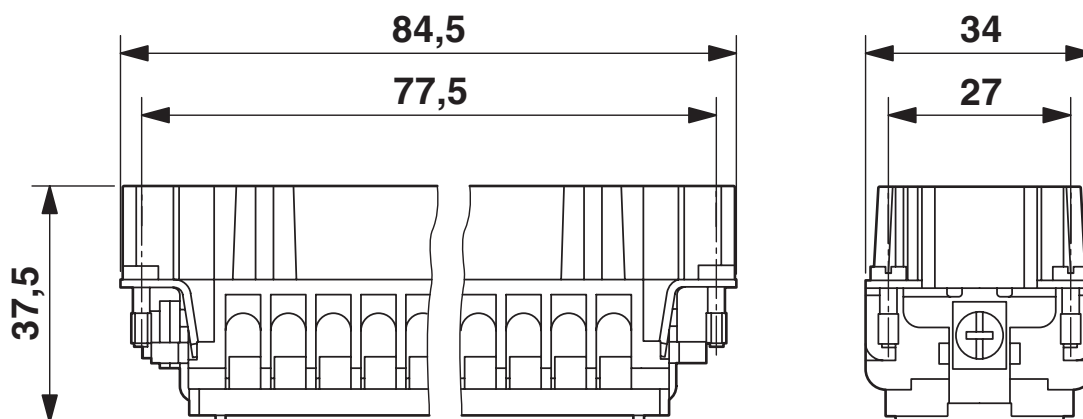

Male insert

Diagram

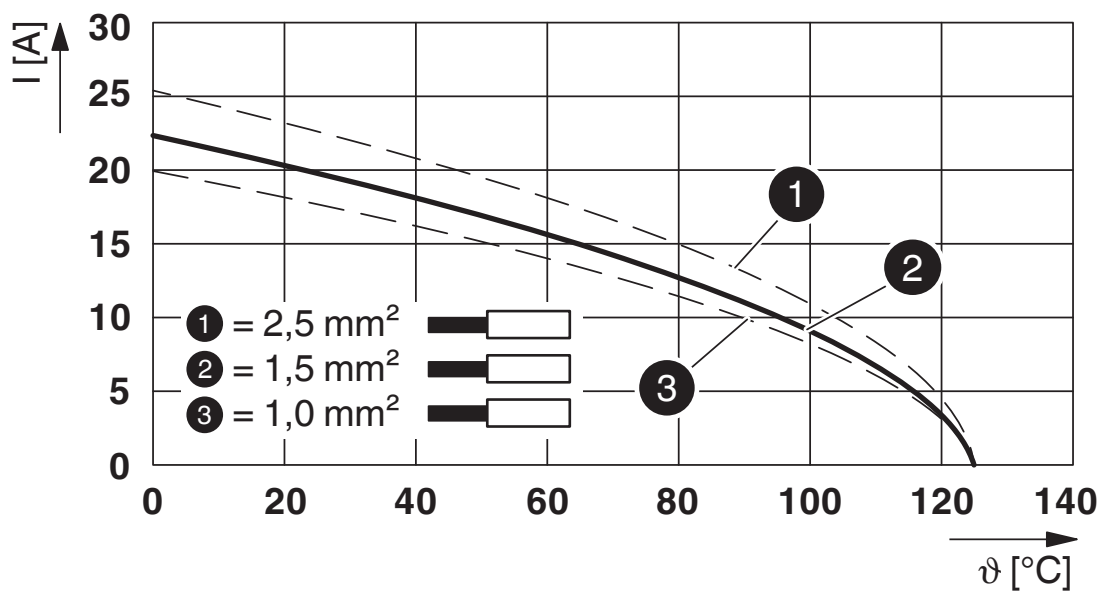

Derating diagram for solid conductors


HC-B 16-ESTQ-2,5 - Contact insert

1605637

<https://www.phoenixcontact.com/in/products/1605637>




Dimensional drawing

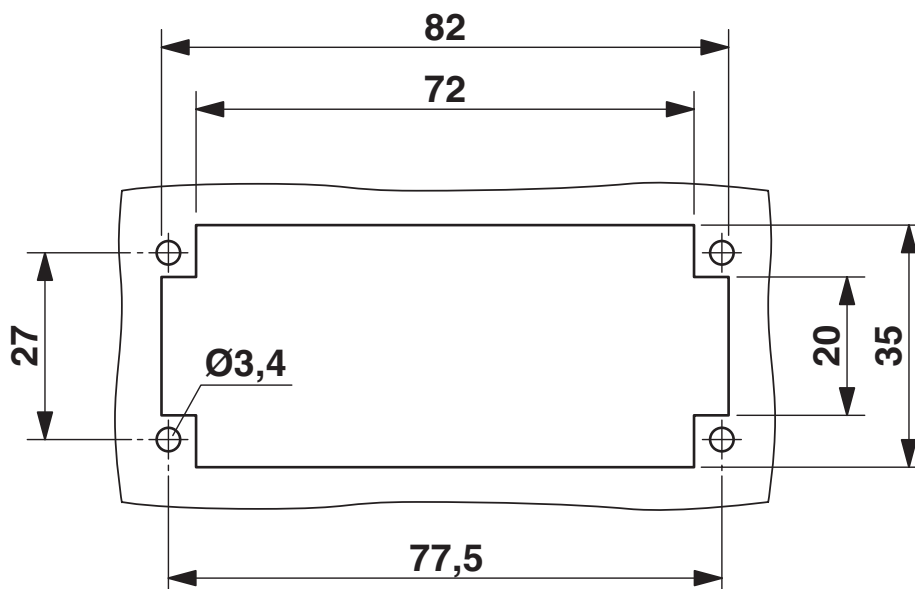

Mounting cutout when used without housing

Diagram

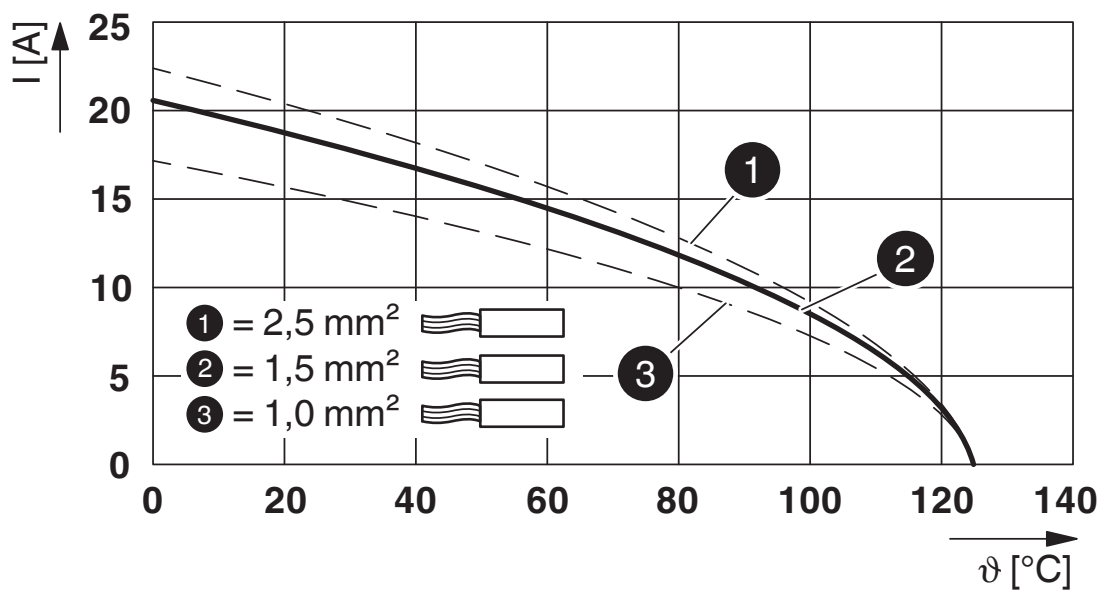

Derating diagram for flexible conductors


HC-B 16-ESTQ-2,5 - Contact insert

1605637

<https://www.phoenixcontact.com/in/products/1605637>



Schematic diagram

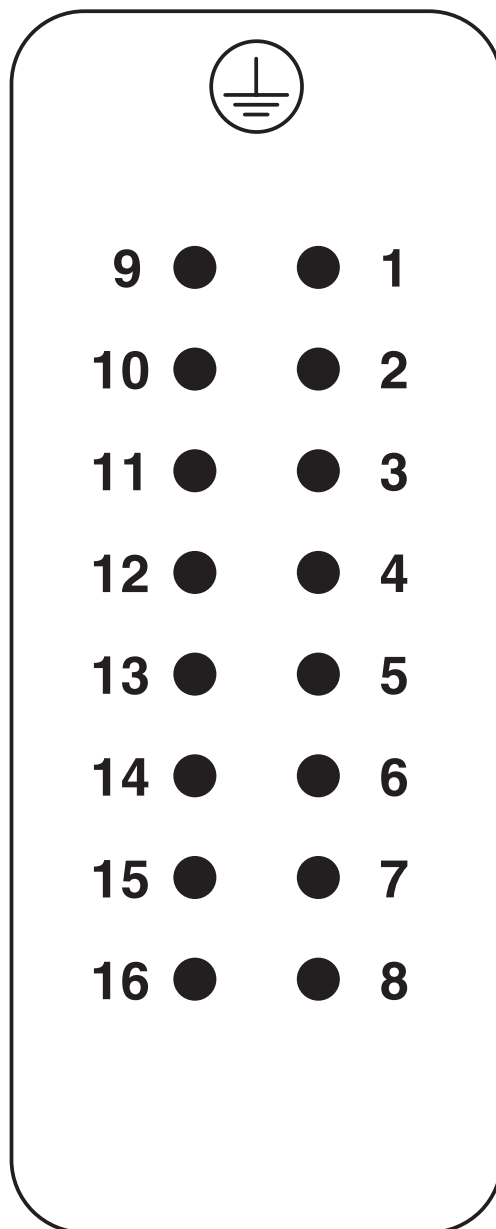

Connector pin assignment, connection side

HC-B 16-ESTQ-2,5 - Contact insert



1605637

<https://www.phoenixcontact.com/in/products/1605637>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1605637>

DNV

Approval ID: TAE000037S



CSA

Approval ID: 013631_6233_01



cUL Recognized

Approval ID: FILE E 118976



UL Recognized

Approval ID: FILE E 118976



EAC

Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

HC-B 16-ESTQ-2,5 - Contact insert



1605637

<https://www.phoenixcontact.com/in/products/1605637>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

HC-B 16-ESTQ-2,5 - Contact insert



1605637

<https://www.phoenixcontact.com/in/products/1605637>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in