

VC-TR4/5M-PEA-S88888-SET - Contact insert set




1607274

<https://www.phoenixcontact.com/il/products/1607274>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Contact insert set for sleeve side, sleeve frame with PE, 4 fixing screws, 8-pos. contact inserts preassembled, 6 coding profiles



Commercial data

| | |
|--------------------------------------|--------------------|
| Item number | 1607274 |
| Packing unit | 5 pc |
| Minimum order quantity | 1 pc |
| Product key | ABLADA |
| Catalog page | Page 32 (C-2-2013) |
| GTIN | 4017918941024 |
| Weight per piece (including packing) | 54.08 g |
| Weight per piece (excluding packing) | 53.37 g |
| Customs tariff number | 85366990 |
| Country of origin | PL |

Technical data

Notes

Safety note

Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.

- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.

- The products are suitable for applications in plant, controller, and electrical device engineering.

- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.

- Assembled products may not be manipulated or improperly opened.

- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)).

- When using the product in direct connection with third-party manufacturers, the user is responsible.

- For operating voltages > 50 V AC, conductive connector housings must be grounded

- Ensure that the protective or functional ground has been properly connected.

- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector

- Observe the corresponding technical data. You will find information:

- o On the product

- o On the packing label

- o In the supplied documentation

- o Online at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) under the product

- Only use tools recommended by Phoenix Contact

- The installation notes/Design In documents online on the download page at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) must be observed for this product.

- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)

- Operate the connector only when it is fully plugged in.

- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the

VC-TR4/5M-PEA-S88888-SET - Contact insert set



1607274

<https://www.phoenixcontact.com/il/products/1607274>

standards.

- Observe the minimum bending radius of the cable. Lay the cable without twisting it.

- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Product properties

| | |
|------------------------|----------------|
| Type | VC4 |
| Product type | Contact insert |
| Product family | VARIOCON |
| Number of positions | 40 |
| Connection profile | 39+PE |
| Number of module slots | 5 |
| Series | VC-D |

Insulation characteristics

| | |
|---------------------|---|
| Degree of pollution | 3 |
|---------------------|---|

Electrical properties


| | |
|-----------------------------|--------|
| Rated voltage (II/2) | 250 V |
| Rated voltage (III/2) | 160 V |
| Rated voltage (III/3) | 160 V |
| | 160 V |
| Nominal voltage ATD | 160 |
| Rated surge voltage | 2.5 kV |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage | 2.5 kV |
| Rated current | 10 A |
| | 10 A |
| | 10 A |
| Nominal voltage U_N | 160 V |
| Nominal current I_N | 10 A |

Connection data

| | |
|----------------------------------|---|
| Tightening torque | 0.22 ... 0.25 Nm |
| Conductor cross section flexible | 0.14 mm ² ... 0.75 mm ² |
| Conductor cross section rigid | 0.14 mm ² ... 1.5 mm ² |

Dimensions

Dimensional drawing



VC-TR4/5M-PEA-S88888-SET - Contact insert set



1607274

<https://www.phoenixcontact.com/il/products/1607274>

| | |
|--------|---------|
| Width | 95.5 mm |
| Height | 27.5 mm |
| Length | 44 mm |

Material specifications

| | |
|--|------------|
| Color of the housing part | black |
| Material | Polyamide |
| | Polyamide |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Contact material | CuZn |
| Contact surface material | tin-plated |
| Contact carrier material | PA 6.6 V0 |
| Housing material | PA 6 |

Cable/line

| | |
|---|------|
| Stripping length of the individual wire | 7 mm |
|---|------|

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|


Environmental and real-life conditions

Ambient conditions


| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 100 °C |
|---------------------------------|-------------------|

Drawings

Dimensional drawing

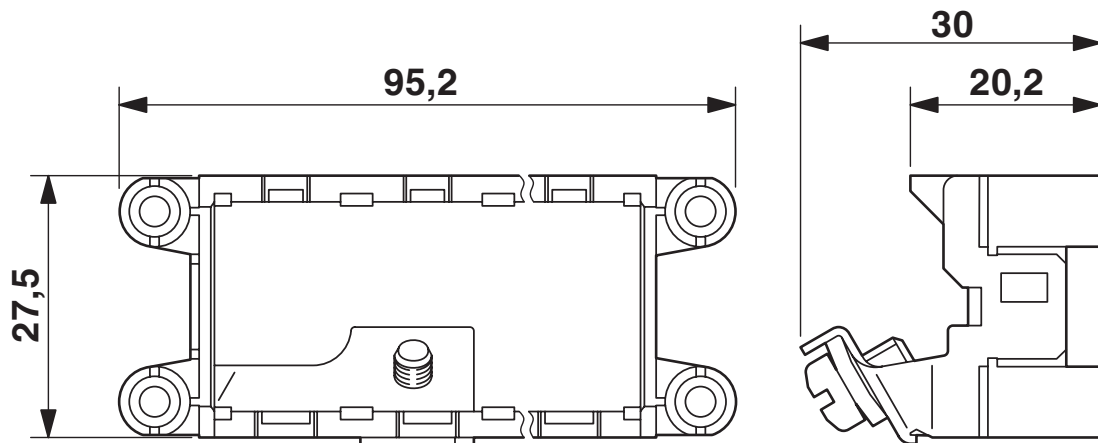

Functional drawing

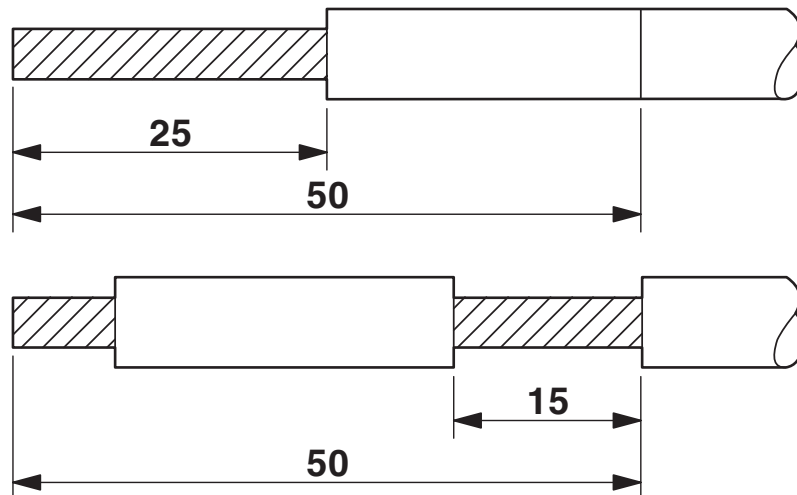

VC-TR4/5M-PEA-S88888-SET - Contact insert set



1607274

<https://www.phoenixcontact.com/il/products/1607274>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440223 |
| ECLASS-12.0 | 27440223 |
| ECLASS-13.0 | 27440223 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC003557 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

VC-TR4/5M-PEA-S88888-SET - Contact insert set



1607274

<https://www.phoenixcontact.com/il/products/1607274>

Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Israel Ltd.
P.O.B. 1799 Industrial Park Hasharon
Quadima 60920
+972-9-8915700
info@phoenixcontact.co.il