

RF-17P1N8AAD00 - Device connector front mounting



1607328
<https://www.phoenixcontact.com/it/products/1607328>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, angled rotatable, Screw locking mechanism, M23, number of positions: 17, contact connection type: Pin, Axial O-ring, 4x Ø 3.2, shielded: yes, flange dimensions: 26 mm x 26 mm, degree of protection: IP67, number of positions: 17, connection method: Crimp connection, series: RF

Your advantages

- Easy connection, thanks to infinitely adjustable cable outlet direction up to 310°
- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable connection solutions in the industrial environment
- Crimping connection: vibration- and temperature-resistant assembly

Commercial data

Item number	1607328
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	ABR
Product key	ABRAGM
Catalog page	Page 112 (C-2-2019)
GTIN	4046356175029
Weight per piece (including packing)	123.5 g
Weight per piece (excluding packing)	119.4 g
Customs tariff number	85366990
Country of origin	DE

RF-17P1N8AAD00 - Device connector front mounting



1607328

<https://www.phoenixcontact.com/it/products/1607328>

Technical data

Notes

General	Order crimp contacts Ø 1 mm separately
---------	--

Mounting

Mounting	4x Ø 3.2
----------	----------

Product properties

Product type	Circular connectors (device side)
Number of positions	17
Connection profile	17
Application	Signal
	Signal
Series	RF
Shielded	yes
Coding	N
Thread type	M23

Dimensions

Housing

Flange dimensions	26 mm x 26 mm
-------------------	---------------

Material specifications

Seal material	FPM
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 6.6
Gasket and O-ring material	FPM

Electrical properties

Contact

Contact diameter	1 mm
Max. current	8 A
Nominal voltage U _N	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

Connection data

Conductor connection

Connection method	Crimp connection
Contact connection type	Pin

RF-17P1N8AAD00 - Device connector front mounting



1607328

<https://www.phoenixcontact.com/it/products/1607328>

Connector

Type	angled rotatable
Direction of rotation	Standard

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Altitude	2000 m

RF-17P1N8AAD00 - Device connector front mounting




1607328

<https://www.phoenixcontact.com/it/products/1607328>


Drawings

Dimensional drawing

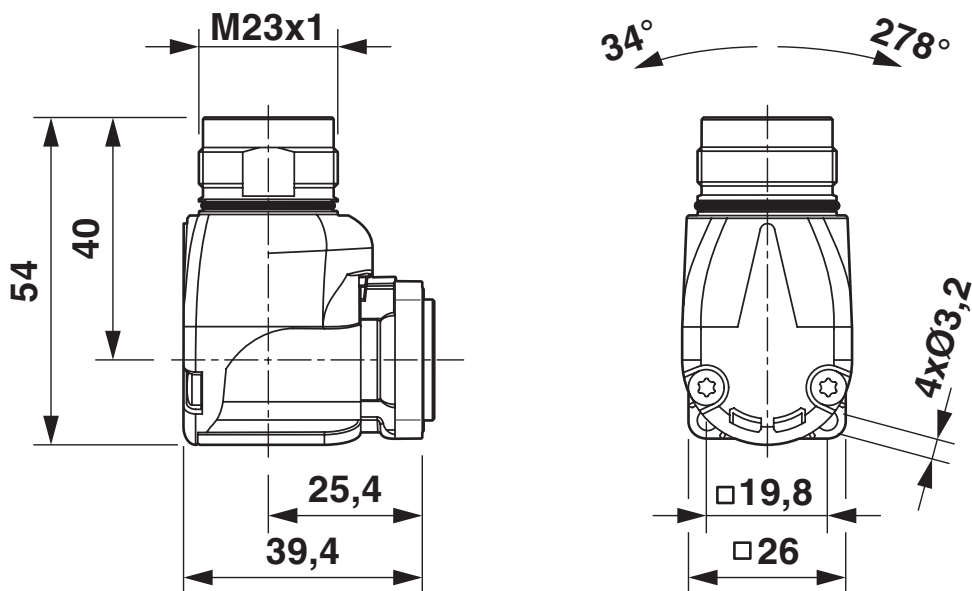

Dimensional drawing

Dimensional drawing

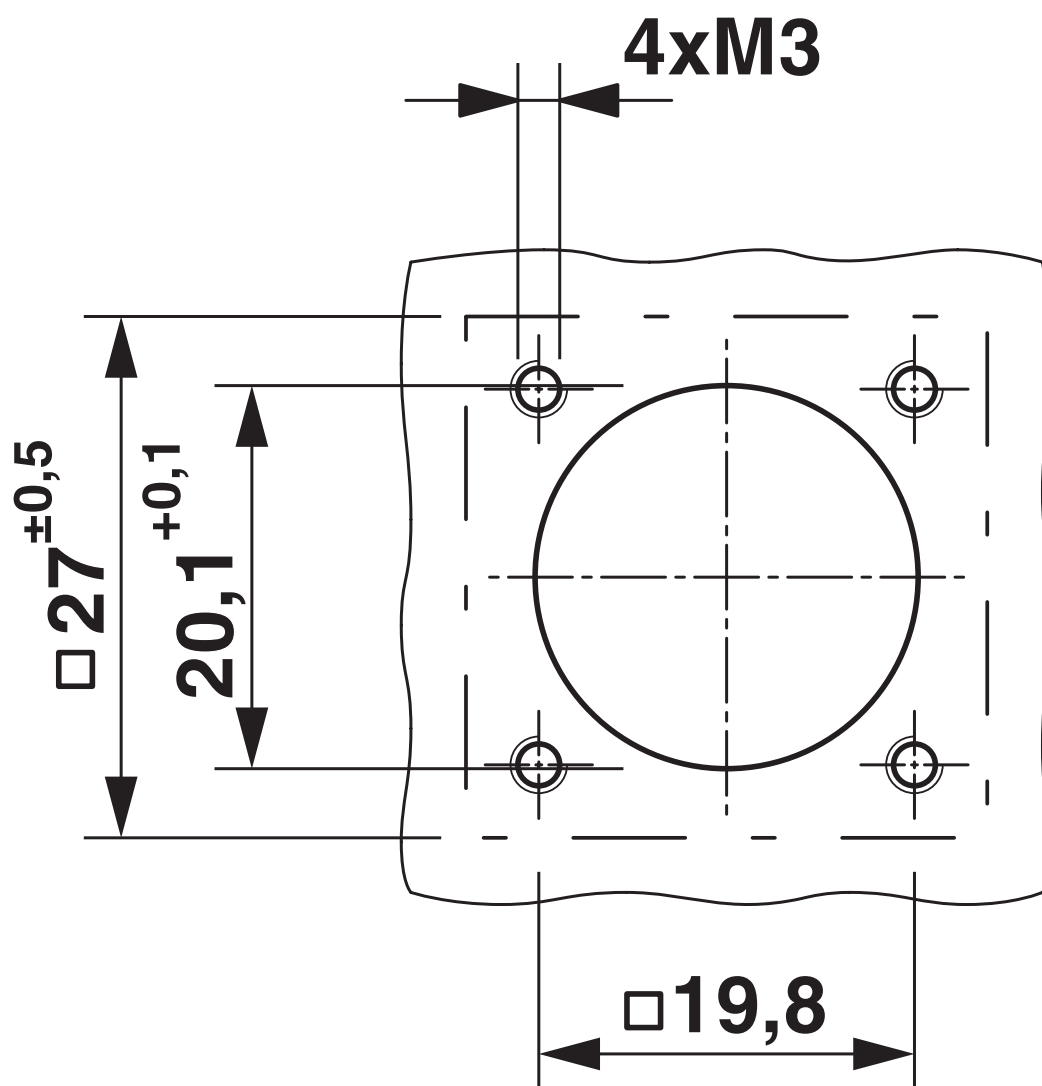


Installation dimensions

1607328

<https://www.phoenixcontact.com/it/products/1607328>

Schematic diagram

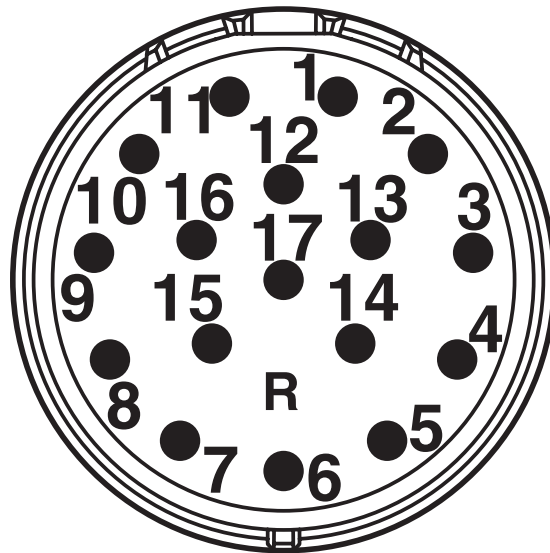

Contact chamber numbering (view of plug-in side), standard pin

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/1607328>

 cUL Recognized Approval ID: E153698-20090723				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	48 V	1 A	- 26	-

 UL Recognized Approval ID: E153698-20090723				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	48 V	1 A	- 26	-

cULus Recognized				
-------------------------	--	--	--	--

RF-17P1N8AAD00 - Device connector front mounting



1607328

<https://www.phoenixcontact.com/it/products/1607328>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1607328
<https://www.phoenixcontact.com/lt/products/1607328>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com