

1607331

https://www.phoenixcontact.com/pc/products/1607331

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable connector, straight, Screw locking mechanism, M23, number of positions: 17, contact connection type: Pin, shielded: yes, degree of protection: IP67, cable diameter range: 5 mm ... 13.2 mm, number of positions: 17, connection method: Crimp connection, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242280

### Commercial data

Item number	1607331
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAGA
Catalog page	Page 78 (PC-2011)
GTIN	4046356174787
Weight per piece (including packing)	98.5 g
Weight per piece (excluding packing)	98.5 g
Customs tariff number	85366990
Country of origin	DE



1607331

https://www.phoenixcontact.com/pc/products/1607331

### Technical data

#### Notes

Order information:	Order crimp contacts Ø 1 mm separately

#### Product properties

Product type	Circular connector (cable-side)
Series	RF
Application	Feedback, signal
	Signal
Number of positions	17
Connection profile	17
Shielded	yes
Coding	N
Thread type	M23

### Material specifications

Seal material	FPM
Housing material	Metal
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 6.6
Gasket and O-ring material	FPM

### Connection data

### Conductor connection

Connection method	Crimp connection
-------------------	------------------

### Electrical properties

#### Contact

Contact diameter	1 mm
Max. current	8 A
Nominal voltage U <sub>N</sub>	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

#### Connector

Туре	straight
Direction of rotation	Counter direction

### Cable/line

	External cable diameter	5 mm 13.2 mm	



1607331

https://www.phoenixcontact.com/pc/products/1607331

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C 125 °C
Altitude	2000 m




https://www.phoenixcontact.com/pc/products/1607331




## Drawings

Dimensional drawing

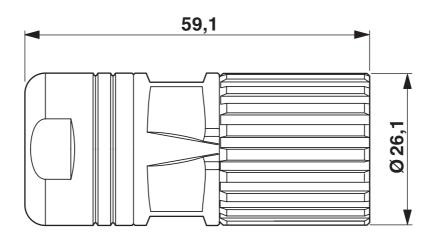

RF-12(17)...N8A80DU

Schematic diagram

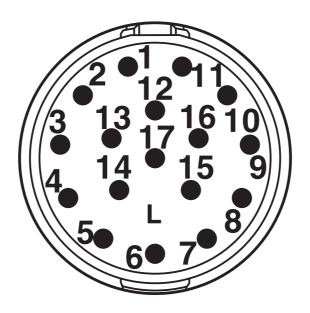

Connector pin assignment



1607331

https://www.phoenixcontact.com/pc/products/1607331

## **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1607331

. <b>51</b> 1	<b>cUL Recognized</b> Approval ID: E153698-20090723			
	Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	48 V	1 A	26 - 26	-

<b>71</b>	UL Recognized Approval ID: E153698-2	0090723			
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		48 V	1 A	26 - 26	-

cULus Recognized



1607331

https://www.phoenixcontact.com/pc/products/1607331

## Classifications

UNSPSC 21.0

#### **ECLASS**

E	CLASS-11.0	27440102
E	CLASS-12.0	27440116
E	CLASS-13.0	27440116
ETIM		
E.	8.0 MIT	EC002635
UNSF	PSC	

39121400



1607331

https://www.phoenixcontact.com/pc/products/1607331

## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	bc769319-3fcb-41a8-9057-2c7b1aeb7674

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com