

1607343

https://www.phoenixcontact.com/lt/products/1607343

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupler connector, straight, Screw locking mechanism, M23, number of positions: 17, contact connection type: Socket, shielded: yes, degree of protection: IP67, cable diameter range: 5 mm . . . 13.2 mm, number of positions: 17, connection method: Crimp connection, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242285

Commercial data

Item number	1607343
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	ABR
Product key	ABRAGG
Catalog page	Page 78 (PC-2011)
GTIN	4046356174695
Weight per piece (including packing)	97.435 g
Weight per piece (excluding packing)	27.03 g
Customs tariff number	85366990
Country of origin	DE



1607343

https://www.phoenixcontact.com/lt/products/1607343

Technical data

Notes

	General	Order crimp contacts Ø 1 mm separately
М	ounting	
	Connection method	Crimp connection

Product properties

Product type	Circular connector (cable-side)	
Number of positions	17	
Connection profile	17	
Application	Feedback, signal	
	Signal	
Series	RF	
Shielded	yes	
Coding	N	
Thread type	M23	

Material specifications

Seal material	FPM
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 6.6
Gasket and O-ring material	FPM
Housing material	Metal

Connection data

Conductor connection

Connection method	Crimp connection

Electrical properties

Contact

Contact diameter	1 mm	
Max. current	8 A	
Nominal voltage U _N	48 V AC 74 V DC	
Overvoltage category	III	
Degree of pollution	3	
Rated surge voltage	1.5 kV	

Connector

Туре	straight
Direction of rotation	Standard



1607343

https://www.phoenixcontact.com/lt/products/1607343

Cable/line

External cable diameter 5 mm 13.2 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67	
Ambient temperature (operation)	-40 °C 125 °C	
Altitude	2000 m	


1607343

https://www.phoenixcontact.com/lt/products/1607343




Drawings

Schematic diagram

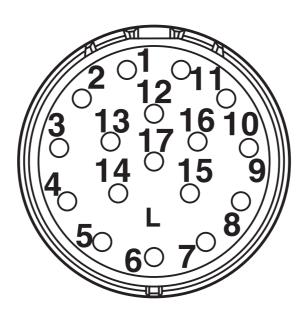

Connector pin assignment

Dimensional drawing

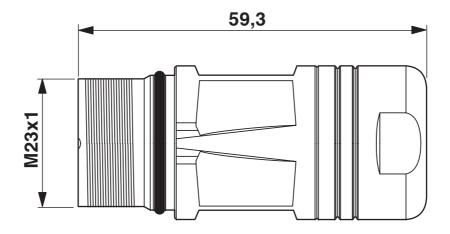


Dimensional drawing



1607343

https://www.phoenixcontact.com/lt/products/1607343

Dimensional drawing

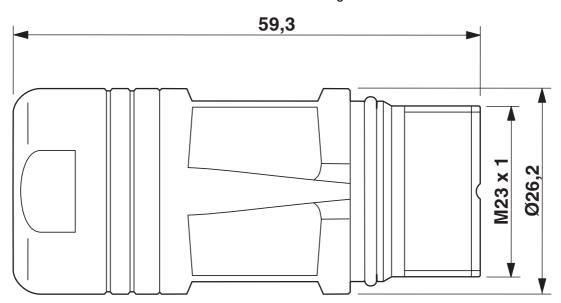

RF-12(17)...N8A90DU



1607343

https://www.phoenixcontact.com/lt/products/1607343

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/lt/products/1607343

. 51 1	cUL Recognized Approval ID: E153698-20090723			
	Nominal voltage U	Nominal current I _N	Cross section AWG	Cross section mm ²
	48 V	1 A	- 26	-

71	UL Recognized Approval ID: E153698-2	0090723			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		48 V	1 A	- 26	-

cULus Recognized



1607343

https://www.phoenixcontact.com/lt/products/1607343

Classifications

UNSPSC 21.0

ECLASS

27440102			
27440116			
27440116			
ETIM			
EC002635			

39121400



1607343

https://www.phoenixcontact.com/lt/products/1607343

Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact UAB Svitrigailos str. 11B 03228 Vilnius +370 5 2106321 balticinfo@phoenixcontact.com