

1608126

<https://www.phoenixcontact.com/it/products/1608126>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



RJ45 connector, degree of protection: IP65/IP67, number of positions: 4, CAT5 (IEC 11801:2002), material: Plastic, connection method: IDC fast connection, connection cross section: AWG 26- 22, cable outlet: straight, color: black, Ethernet

Commercial data

Item number	1608126
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	ABN
Product key	ABNOAA
Catalog page	Page 358 (C-2-2019)
GTIN	4046356159968
Weight per piece (including packing)	32.7 g
Weight per piece (excluding packing)	31.8 g
Customs tariff number	85366990
Country of origin	DE

Technical data

Notes

General	This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.2 Connectors for Outside Environment (Balanced cabling) and chapter 13 Application specific Cabling and Interconnection Technology (AIDA)
---------	--

Product properties

Type	RJ45
Product type	Data connector (cable side)
Sensor type	Ethernet
Number of positions	4
No. of cable outlets	1
Shielded	yes
Cable outlet	straight

Insulation characteristics

Overvoltage category	I
Degree of pollution	2

Electrical properties

Rated voltage (III/3)	72 V (DC)
Rated current	1.75 A
Nominal voltage U_N	48 V
Nominal current I_N	1 A
Contact resistance	0.001 Ω (Wire – IDC) 0.005 Ω (Litz wires – IDC)
Transmission medium	Copper
Transmission characteristics (category)	CAT5
Transmission speed	100 Mbps

Connection data

Connection technology

Connection method	IDC fast connection
Connection cross section AWG	26 ... 22 (solid) 26 ... 22 (flexible)
Conductor cross section	0.13 mm ² ... 0.32 mm ² (solid) 0.14 mm ² ... 0.36 mm ² (flexible)

Dimensions

Width	22 mm
Height	30 mm

VS-PPC-C1-RJ45-POBK-PG9-4Q5 - RJ45 connector



1608126

<https://www.phoenixcontact.com/it/products/1608126>

Length	70 mm
--------	-------

Material specifications

Color	black
Material	Plastic
Flammability rating according to UL 94	V0
Seal material, O-ring	NBR
Seal material cable seal	TPE
Seal material	NBR
Seal material, pin connector pattern	NBR
Cable seal material	TPE
Contact material	CuSn
Contact surface material	Au/Ni
Contact carrier material	PC
O-ring material	NBR
Material for screw connection	PA
Housing material	Plastic
Outer sheath, material	PVC
Conductor material	Tin-plated Cu litz wires

Cable/line

Cable structure	1x4xAWG22/7, SF/TQ
External cable diameter ()	5 mm ... 8 mm
Outer sheath, material	PVC
Cable cross section	0.4 mm ²
Conductor material	Tin-plated Cu litz wires

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65/IP67
Ambient temperature (operation)	-10 °C ... 60 °C

Standards and regulations

Standards/specifications	IEC PAS 61076-3-117
--------------------------	---------------------

Mounting

Connection method	IDC fast connection
-------------------	---------------------

VS-PPC-C1-RJ45-POBK-PG9-4Q5 - RJ45 connector


1608126

<https://www.phoenixcontact.com/it/products/1608126>



Drawings

Dimensional drawing

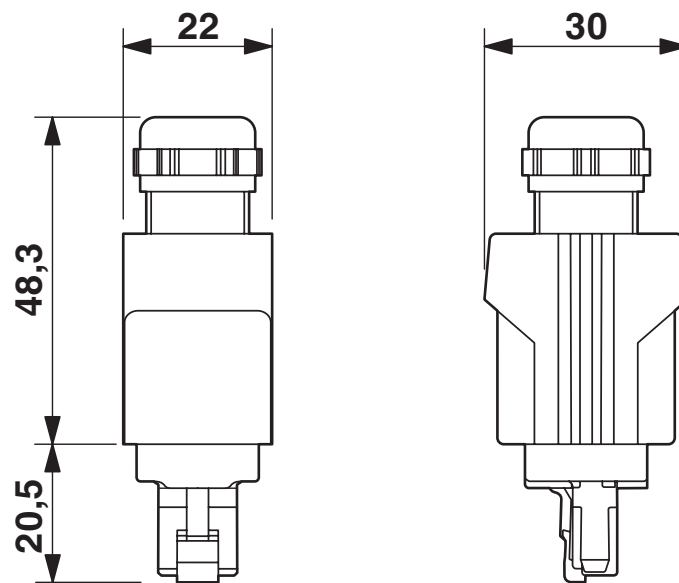

Push-pull RJ45 connector IP65/67

VS-PPC-C1-RJ45-POBK-PG9-4Q5 - RJ45 connector



1608126

<https://www.phoenixcontact.com/it/products/1608126>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/1608126>

cUL Recognized Approval ID: FILE E 118976				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
Only rigid conductors	50 V	1.75 A	- 22	-

UL Recognized Approval ID: FILE E 118976				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
Only rigid conductors	50 V	1.75 A	- 22	-

cULus Recognized				
------------------	--	--	--	--

VS-PPC-C1-RJ45-POBK-PG9-4Q5 - RJ45 connector



1608126

<https://www.phoenixcontact.com/it/products/1608126>

Classifications

ECLASS

ECLASS-11.0	27440101
ECLASS-12.0	27440113
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002636
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact UAB
Svitrigailos str. 11B
03228 Vilnius
+370 5 2106321
balticinfo@phoenixcontact.com