

# ST-17S1N8A6100S - Device connector front mounting



1613542

<https://www.phoenixcontact.com/us/products/1613542>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, straight, for standard and SPEEDCON interlock, M17, number of positions: 17, contact connection type: Socket, Axial O-ring, Central fixing, shielded: yes, degree of protection: IP67, number of positions: 17, connection method: Crimp connection, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242773

## Your advantages

- Application-specific wall mounting optionally with thread or anti-rotation protection and lock nut
- Consistent EMC protection for reliable connection solutions in the industrial environment
- Crimping connection: vibration- and temperature-resistant assembly

## Commercial data

Item number	1613542
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRACL
Catalog page	Page 69 (C-2-2019)
GTIN	4046356400930
Weight per piece (including packing)	22.9 g
Weight per piece (excluding packing)	19 g
Customs tariff number	85366990
Country of origin	DE

## Technical data

### Notes

Order information:	Order crimp contacts Ø 0.6 mm separately
<b>Safety note</b>	
Safety note	<p><b>WARNING:</b> The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"><li>• <b>WARNING:</b> Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li><li>• <b>WARNING:</b> Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li><li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li><li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li><li>• Assembled products may not be manipulated or improperly opened.</li><li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li><li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li><li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li><li>• Ensure that the protective or functional ground has been properly connected.</li><li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li><li>• Only use tools recommended by Phoenix Contact</li><li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li><li>• Operate the connector only when it is fully plugged in and interlocked.</li><li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li><li>• Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li><li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting</li></ul>

# ST-17S1N8A6100S - Device connector front mounting

1613542

<https://www.phoenixcontact.com/us/products/1613542>



warnings (e.g. DIN EN ISO 13732-1:2008-12).

## Mounting

Mounting type	Front mounting
Mounting	Central fixing

## Product properties

Product type	Circular connectors (device side)
Series	ST
Application	Signal
Application	Signal
Number of positions	17
Connection profile	17
Shielded	yes
Coding	N
Thread type	M17

## Data management status

Article revision	05
------------------	----

## Material specifications

Seal material	FPM
Housing material	Metal

## Electrical properties

### Contact

Contact diameter	0.6 mm
Max. current	3.6 A
Nominal voltage U <sub>N</sub>	48 V AC 74 V DC
Overshoot category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

## Connection data

### Conductor connection

Connection method	Crimp connection
Contact connection type	Socket

## Connector

Type	straight
Direction of rotation	Standard

### Connection 1

Head design	Socket
-------------	--------

# ST-17S1N8A6100S - Device connector front mounting

1613542

<https://www.phoenixcontact.com/us/products/1613542>



## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Ambient temperature (storage/transport)	15 °C ... 25 °C
Altitude	3000 m
Permissible humidity (storage/transport)	50 % ... 65 %

# ST-17S1N8A6100S - Device connector front mounting


1613542

<https://www.phoenixcontact.com/us/products/1613542>




## Drawings

Dimensional drawing

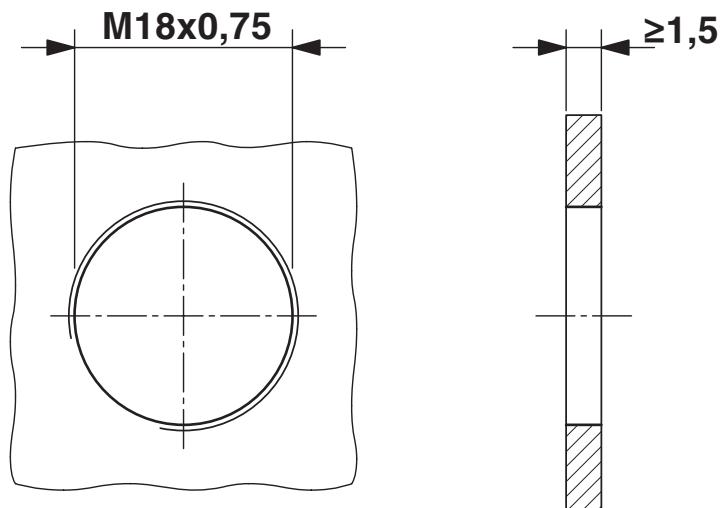

Installation dimensions: mounting with thread

Dimensional drawing

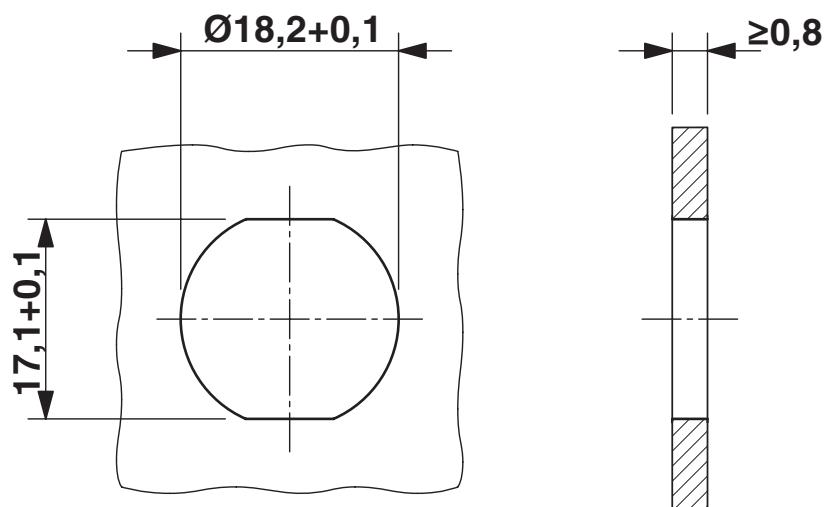

Installation dimensions: mounting with anti-rotation protection and locking nut


# ST-17S1N8A6100S - Device connector front mounting



1613542


<https://www.phoenixcontact.com/us/products/1613542>

Diagram

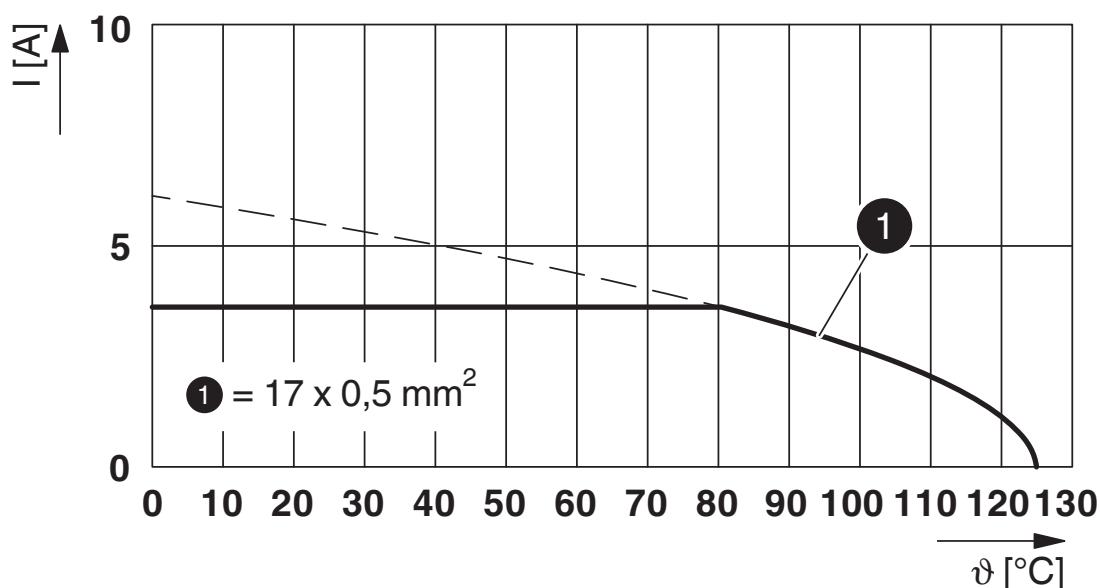

$I$  = current strength,  $\vartheta$  = ambient temperature,  $17 \times 3.6$  A

Dimensional drawing

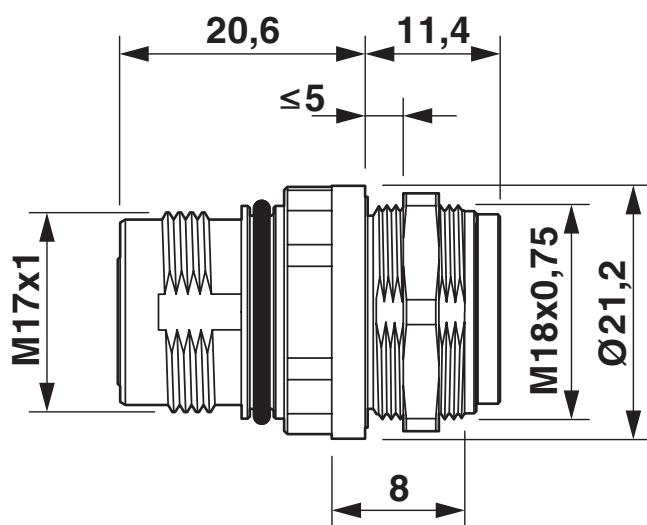

Dimensional drawing


# ST-17S1N8A6100S - Device connector front mounting

1613542

<https://www.phoenixcontact.com/us/products/1613542>



Schematic diagram

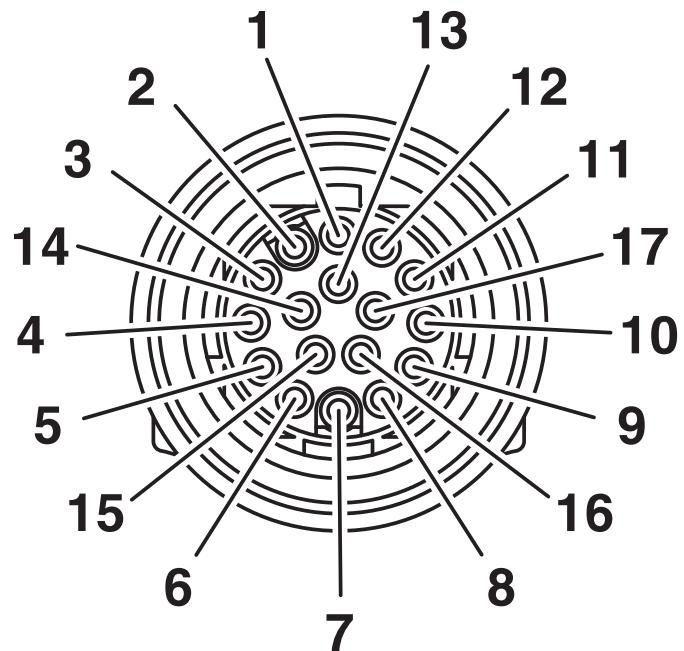

Connector pin assignment

# ST-17S1N8A6100S - Device connector front mounting

1613542

<https://www.phoenixcontact.com/us/products/1613542>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1613542>

cUL Recognized				
Approval ID: E335019-20111129				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
	48 V	1 A	- 26	-

UL Recognized				
Approval ID: E335019-20111129				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
	48 V	1 A	- 26	-

UL Recognized				
Approval ID: E153698-20140124				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
	48 V	1 A	-	-

cUL Recognized				
Approval ID: E153698-20140124				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
	48 V	1 A	-	-

# ST-17S1N8A6100S - Device connector front mounting

1613542

<https://www.phoenixcontact.com/us/products/1613542>



## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# ST-17S1N8A6100S - Device connector front mounting

1613542

<https://www.phoenixcontact.com/us/products/1613542>



## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7815e406-74a1-4ed5-8206-3f01ed4fc00d

# ST-17S1N8A6100S - Device connector front mounting



1613542

<https://www.phoenixcontact.com/us/products/1613542>

## Accessories

### ST-06KS010 - Crimp contact

1607580

<https://www.phoenixcontact.com/us/products/1607580>



Crimp contact, Socket, turned, contact diameter: 0.6 mm, crimp range: 0.06 mm<sup>2</sup> ... 0.25 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242314

---

### ST-06KS020 - Crimp contact

1607581

<https://www.phoenixcontact.com/us/products/1607581>



Crimp contact, Socket, turned, contact diameter: 0.6 mm, crimp range: 0.14 mm<sup>2</sup> ... 0.34 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242314

# ST-17S1N8A6100S - Device connector front mounting



1613542

<https://www.phoenixcontact.com/us/products/1613542>

## ST-06KS030 - Crimp contact

1607582

<https://www.phoenixcontact.com/us/products/1607582>



Crimp contact, Socket, turned, contact diameter: 0.6 mm, crimp range: 0.34 mm<sup>2</sup> ... 0.5 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242315

---

## ST-Z0019 - Color coding

1620621

<https://www.phoenixcontact.com/us/products/1620621>

Color coding, color: green



# ST-17S1N8A6100S - Device connector front mounting

1613542

<https://www.phoenixcontact.com/us/products/1613542>



## ST-Z0020 - Color coding

1620622

<https://www.phoenixcontact.com/us/products/1620622>

Color coding, color: orange



---

## ST-Z0021 - Color coding

1620623

<https://www.phoenixcontact.com/us/products/1620623>

Color coding, color: black



# ST-17S1N8A6100S - Device connector front mounting



1613542

<https://www.phoenixcontact.com/us/products/1613542>

## ST-Z0001 - Contact removal tool

1607770

<https://www.phoenixcontact.com/us/products/1607770>

Unlocking tool for contact carriers for snapping in the M17 device connectors



---

## ST-E2015151 - Flat nut

1613831

<https://www.phoenixcontact.com/us/products/1613831>

Flat nut, Screw mounting, M18 x 0,75, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242824



# ST-17S1N8A6100S - Device connector front mounting



1613542

<https://www.phoenixcontact.com/us/products/1613542>

## ST-Z0014 - Metal protective cap

1616069

<https://www.phoenixcontact.com/us/products/1616069>



Metal protective cap, M17, degree of protection: IP67, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243010

## ST-Z0013 - Metal protective cap

1616068

<https://www.phoenixcontact.com/us/products/1616068>



Metal protective cap, M17, degree of protection: IP67, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243009

# ST-17S1N8A6100S - Device connector front mounting

1613542

<https://www.phoenixcontact.com/us/products/1613542>



## PROT-M17PRO-OT-IP20 - Plastic protective cap

1055708

<https://www.phoenixcontact.com/us/products/1055708>

Plastic protective cap, M17, degree of protection: IP20, series: M17 PRO



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)