

RF-16S1N8A80DU - Cable connector



1613727

<https://www.phoenixcontact.com/ie/products/1613727>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable connector, straight, Screw locking mechanism, M23, number of positions: 16, contact connection type: Socket, shielded: yes, degree of protection: IP67, cable diameter range: 5 mm . .. 13.2 mm, number of positions: 16, connection method: Crimp connection, series: RF

Commercial data

Item number	1613727
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB
Product key	ABRAGA
GTIN	4046356401869
Weight per piece (including packing)	99.935 g
Weight per piece (excluding packing)	94.35 g
Customs tariff number	85366990
Country of origin	DE

RF-16S1N8A80DU - Cable connector



1613727

<https://www.phoenixcontact.com/ie/products/1613727>

Technical data

Notes

Order information:	Order crimp contacts Ø 1 mm separately
--------------------	--

Product properties

Product type	Circular connectors (device side)
Series	RF
Application	Feedback, signal
	Signal
Number of positions	16
Connection profile	16
Shielded	yes
Coding	N
Thread type	M23

Material specifications

Seal material	FPM
Housing material	Metal
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 6.6
Gasket and O-ring material	FPM

Electrical properties

Contact

Contact diameter	1 mm
Max. current	8 A
Nominal voltage U_N	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

Connection data

Conductor connection

Connection method	Crimp connection
Contact connection type	Socket

Connector

Type	straight
Direction of rotation	Standard

Cable/line

RF-16S1N8A80DU - Cable connector



1613727

<https://www.phoenixcontact.com/ie/products/1613727>

External cable diameter	5 mm ... 13.2 mm
-------------------------	------------------

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Altitude	2000 m


RF-16S1N8A80DU - Cable connector

1613727


<https://www.phoenixcontact.com/ie/products/1613727>

Drawings

Schematic diagram

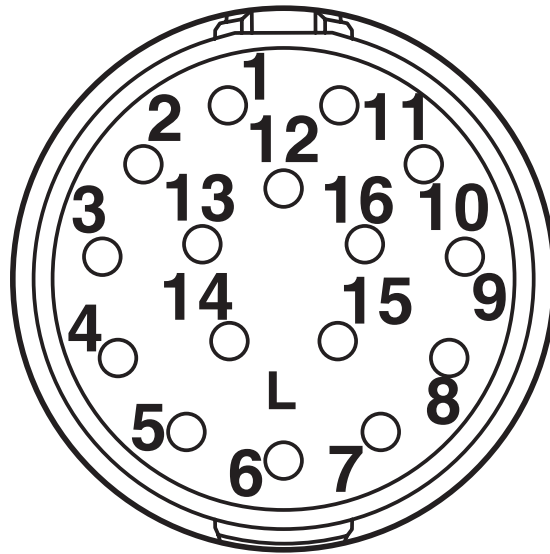

Dimensional drawing

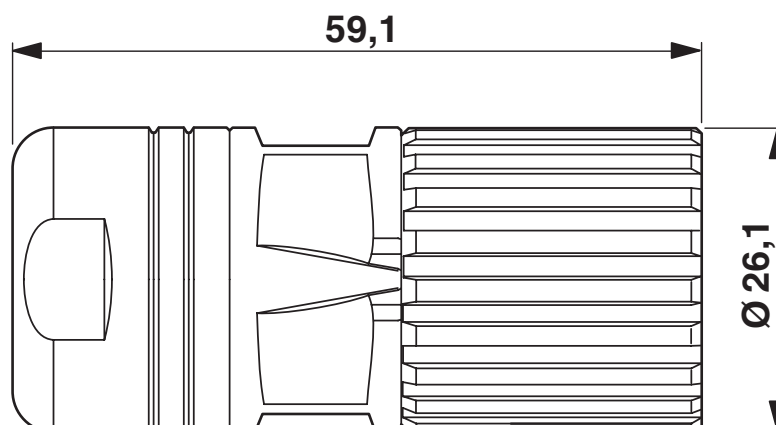

RF-16S1N8A80DU - Cable connector



1613727

<https://www.phoenixcontact.com/ie/products/1613727>

Classifications

ECLASS

ECLASS-11.0	27440102
-------------	----------

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

RF-16S1N8A80DU - Cable connector



1613727

<https://www.phoenixcontact.com/ie/products/1613727>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	5edae394-de33-493c-983e-8556aa4ae6bf

RF-16S1N8A80DU - Cable connector



1613727

<https://www.phoenixcontact.com/ie/products/1613727>

Accessories

SF-6CS2000 - Crimp contact

1605562

<https://www.phoenixcontact.com/ie/products/1605562>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.06 mm² ... 0.25 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241922

SF-10KS004 - Crimp contact

1607356

<https://www.phoenixcontact.com/ie/products/1607356>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.14 mm² ... 0.5 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241922

RF-16S1N8A80DU - Cable connector

1613727

<https://www.phoenixcontact.com/ie/products/1613727>



SF-6AS2000 - Crimp contact

1605557

<https://www.phoenixcontact.com/ie/products/1605557>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.25 mm² ... 1 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241922

SF-10KS010 - Crimp contact

1605481

<https://www.phoenixcontact.com/ie/products/1605481>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.14 mm² ... 1 mm², Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241922

RF-16S1N8A80DU - Cable connector

1613727

<https://www.phoenixcontact.com/ie/products/1613727>



SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/ie/products/1607456>

Torque screwdriver, series: RC, UC, SH, SF



SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/ie/products/1607455>

Hook wrench, series: RC, UC, RF, SF



RF-16S1N8A80DU - Cable connector



1613727

<https://www.phoenixcontact.com/ie/products/1613727>

RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/ie/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242369

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact (Ireland) Ltd
C6 The Exchange, Calmount Park, Ballymount
Dublin 12, D12 XE18
+353/1/2051-300
info@phoenixcontact.ie