

1619293

https://www.phoenixcontact.com/us/products/1619293

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector in molded plastic on both sides, Straight, plastic molded, number of positions: 12, type of locking: Screw locking mechanism, Straight, plastic molded, shielded: yes, color of outer sheath: orange RAL 2003

Your advantages

- Our standard: robust halogen-free PUR cable
- Simple and safe: 100% electrically tested and assembled ready for use
- · Designs with preassembled cables on one or both sides
- · High flexibility: customer-specific assemblies and cable lengths can be supplied

Commercial data

Item number	1619293
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB34
Product key	ABRDFG
Catalog page	Page 217 (C-2-2019)
GTIN	4046356835077
Weight per piece (including packing)	621.9 g
Weight per piece (excluding packing)	621 g
Customs tariff number	85444290
Country of origin	DE



1619293

https://www.phoenixcontact.com/us/products/1619293

Technical data

Product properties

Product type	Signal and power cable
Data management status	
Article revision	09

Connector

Connector specifications

Туре	Straight, plastic molded
Housing material	Zinc die-cast
Type of locking	Screw locking mechanism
Degree of protection	IP67, when in locked state
No. of pos.	12
Direction of rotation	Standard
Insertion/withdrawal cycles	50
Contact resistance	< 0.3 mΩ
Max. current	8 A
Voltage	48 V AC
	74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV
Ambient temperature (operation)	-40 °C 105 °C

Cable specifications

Cable type	RSL9YSLC11Y
Shielded	yes
Cable structure	4 x 2 x 0.25 mm ² + 2 x 0.5 mm ²
Cable structure (AWG)	24 AWG/4pr + 20 AWG/2c
External cable diameter	8.00 mm
Outer sheath, material	TPU
Material wire insulation	PP
External sheath, color	orange RAL 2003
Test voltage	1 kV
Rated current	9 A
Smallest bending radius, fixed installation	40 mm
Smallest bending radius, movable installation	60 mm
Ambient temperature (operation) for fixed installation	-40 °C 80 °C
Ambient temperature (operation) for flexible installation	-20 °C 60 °C

Connector specifications (second page)



1619293

https://www.phoenixcontact.com/us/products/1619293

Туре	Straight, plastic molded
Electrical properties	
Nominal current I _N	9 A




1619293

https://www.phoenixcontact.com/us/products/1619293

Drawings

Circuit diagram

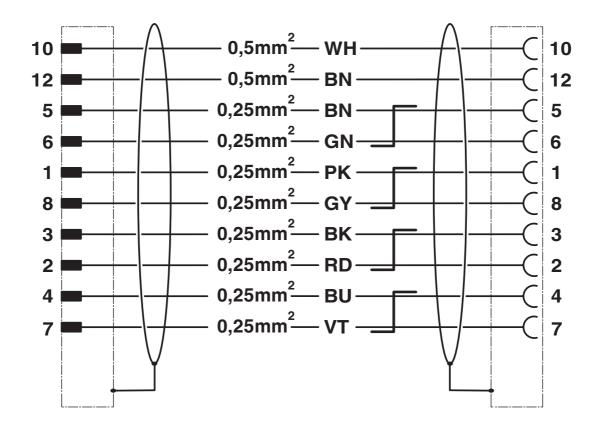




1619293

https://www.phoenixcontact.com/us/products/1619293

Dimensional drawing

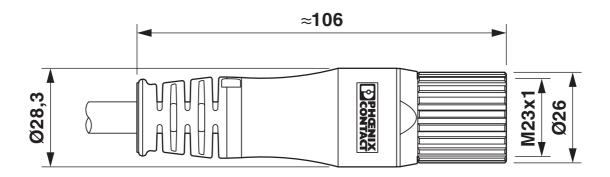


On the female side



1619293

https://www.phoenixcontact.com/us/products/1619293

Schematic diagram

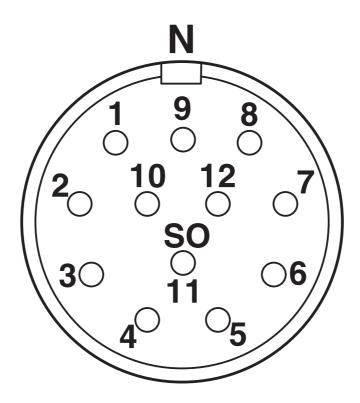


Socket pin assignment



1619293

https://www.phoenixcontact.com/us/products/1619293

Dimensional drawing

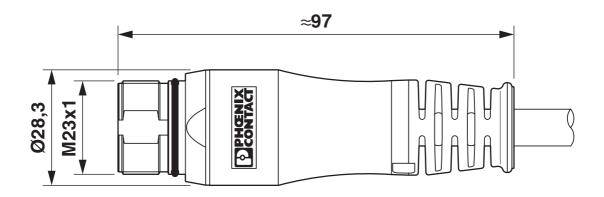


Pin side



1619293

https://www.phoenixcontact.com/us/products/1619293

Schematic diagram

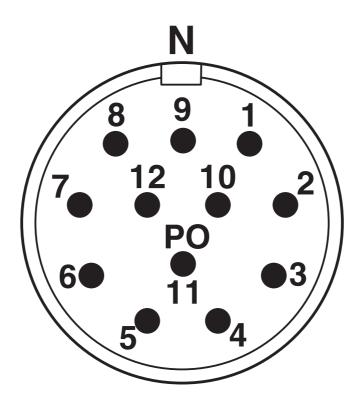

Pin assignment of pin



1619293

https://www.phoenixcontact.com/us/products/1619293

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1619293

EHE	EAC
LIIL	Approval ID: 19060508

UL Listed Approval ID: E335019-201	40707			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
Power	48 V	5 A	-	-
Signal	48 V	2 A	-	-

cUL Listed Approval ID: E335019-20	140707			
	Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
Power	48 V	5 A	-	-
Signal	48 V	2 A	-	-



1619293

https://www.phoenixcontact.com/us/products/1619293

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27060106
ECLASS-12.0	27060106
ECLASS-13.0	27060106
ETIM	
ETIM 9.0	EC003250
UNSPSC	

26121600



1619293

https://www.phoenixcontact.com/us/products/1619293

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(b), 6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f74e7e87-a797-427e-9856-8bcca33ad101

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com