

CA-12S1N1280DNS - Cable connector



1619593

<https://www.phoenixcontact.com/us/products/1619593>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, SPEEDCON, No. of pos.: 12, Direction of rotation: Standard, contact connection type: Socket, Solder connection, cable diameter range: 3 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243684

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Reduced connection time with SPEEDCON fast locking system
- Solder connection: proven connection technology for various litz wires

Commercial data

| | |
|--------------------------------------|--------------------|
| Item number | 1619593 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB31 |
| Product key | ABRAEB |
| Catalog page | Page 84 (C-2-2019) |
| GTIN | 4046356822817 |
| Weight per piece (including packing) | 97.133 g |
| Weight per piece (excluding packing) | 93 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

CA-12S1N1280DNS - Cable connector



1619593

<https://www.phoenixcontact.com/us/products/1619593>

Technical data

Product properties

| | |
|------------------------|---------------------------------|
| Product type | Circular connector (cable-side) |
| Data management status | |
| Article revision | 08 |

Connector

Connection 1

| | |
|-------------|--------|
| Head design | Socket |
|-------------|--------|

Insulating body

| | |
|------------------------------------|--------------------|
| Coding | N |
| Insulation body material | PBT |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Insertion/withdrawal cycles | 100 |
| Connection method | Solder connection |
| Contact switching type | Socket |
| Application | Signal |
| Number of positions | 12 |
| Direction of rotation | Standard |
| Connection profile | 12 |
| Rated voltage | 48 V AC 74 V DC |
| Rated surge voltage | 1.5 kV |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Contact diameter | 1 mm |
| Litz wire cross-section | 1 mm ² |
| Nominal current per signal contact | 8 A |

Signal contacts

Signal contacts max.

Housing

| | |
|-----------------------------------|-------------|
| Housing material | CuZn, GD-Zn |
| Type of locking | SPEEDCON |
| Pg screw connection | none |
| Degree of protection (plugged in) | IP67 |
| Thread type | M23 |

Seal

| | |
|-------------------------|------------------|
| External cable diameter | 3 mm ... 14.5 mm |
| Seal material | NBR |

CA-12S1N1280DNS - Cable connector



1619593

<https://www.phoenixcontact.com/us/products/1619593>

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

CA-12S1N1280DNS - Cable connector




1619593

<https://www.phoenixcontact.com/us/products/1619593>

Drawings

Schematic diagram

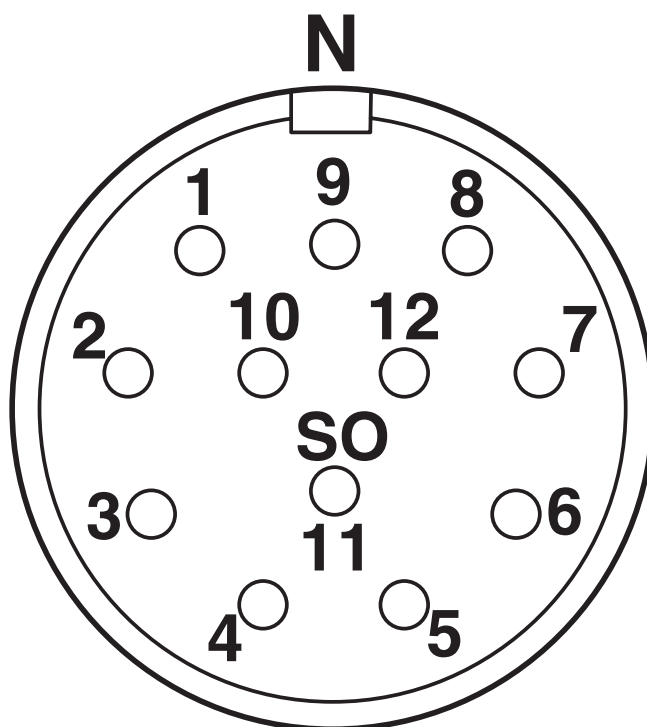

Connector pin assignment

CA-12S1N1280DNS - Cable connector




1619593

<https://www.phoenixcontact.com/us/products/1619593>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1619593>

| | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  cUL Recognized Approval ID: E335019-20141210 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 48 V | 6 A | 18 - 18 | - |

| | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
|  UL Recognized Approval ID: E335019-20141210 | | | | |
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 48 V | 8 A | 18 - 18 | - |

| | | | | |
|-------------------------|--|--|--|--|
| cULus Recognized | | | | |
|-------------------------|--|--|--|--|

CA-12S1N1280DNS - Cable connector



1619593

<https://www.phoenixcontact.com/us/products/1619593>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002635 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

CA-12S1N1280DNS - Cable connector



1619593

<https://www.phoenixcontact.com/us/products/1619593>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 98dfdc39-f7ee-4254-8e42-3b4c61bd59a8 |

CA-12S1N1280DNS - Cable connector

1619593

<https://www.phoenixcontact.com/us/products/1619593>



Accessories

SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/us/products/1607456>

Torque screwdriver, series: RC, UC, SH, SF



SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/us/products/1607455>

Hook wrench, series: RC, UC, RF, SF



CA-12S1N1280DNS - Cable connector

1619593

<https://www.phoenixcontact.com/us/products/1619593>




RF-Z0014 - Color coding

1620588

<https://www.phoenixcontact.com/us/products/1620588>

Color coding, color: green



RF-Z0015 - Color coding

1620592

<https://www.phoenixcontact.com/us/products/1620592>

Color coding, color: orange



CA-12S1N1280DNS - Cable connector

1619593

<https://www.phoenixcontact.com/us/products/1619593>



RF-Z0016 - Color coding

1620593

<https://www.phoenixcontact.com/us/products/1620593>

Color coding, color: black



RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/us/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242369

CA-12S1N1280DNS - Cable connector

1619593

<https://www.phoenixcontact.com/us/products/1619593>



CA-Z0077 - Metal protective cap

1627224

<https://www.phoenixcontact.com/us/products/1627224>



Metal protective cap, degree of protection: IP67, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245447

PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/us/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com