

CA-19S1N128008 - Cable connector



1619635

<https://www.phoenixcontact.com/pc/products/1619635>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, Screw locking mechanism, No. of pos. : 16+3, Direction of rotation: Standard, contact connection type: Socket, Solder connection, cable diameter range: 10 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243724

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Solder connection: proven connection technology for various litz wires

Commercial data

Item number	1619635
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ABRAEA
Catalog page	Page 87 (C-2-2019)
GTIN	4046356822435
Weight per piece (including packing)	94.3 g
Weight per piece (excluding packing)	90.7 g
Customs tariff number	85366990
Country of origin	DE

CA-19S1N128008 - Cable connector



1619635

<https://www.phoenixcontact.com/pc/products/1619635>

Technical data

Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

Connector

Connection 1

Head design	Socket
-------------	--------

Insulating body

Coding	N
Insulation body material	PA 6.6
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Socket
Application	Signal
Number of positions	19
Direction of rotation	Standard
Connection profile	16+3
Contact diameter Power contacts	1.5 mm
Litz wire cross-section Power contacts max.	1 mm ²
Rated current Power contacts	10 A
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter Signal contacts	1 mm
Litz wire cross-section Signal contacts max.	1 mm ²
Nominal current per signal contact	8 A

Housing

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	Screw locking mechanism
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

Seal

External cable diameter	10 mm ... 14.5 mm
-------------------------	-------------------

CA-19S1N128008 - Cable connector



1619635

<https://www.phoenixcontact.com/pc/products/1619635>

Seal material	NBR
---------------	-----

Environmental and real-life conditions

Ambient conditions	
Ambient temperature (operation)	-40 °C ... 125 °C

CA-19S1N128008 - Cable connector


1619635

<https://www.phoenixcontact.com/pc/products/1619635>



Drawings

Dimensional drawing

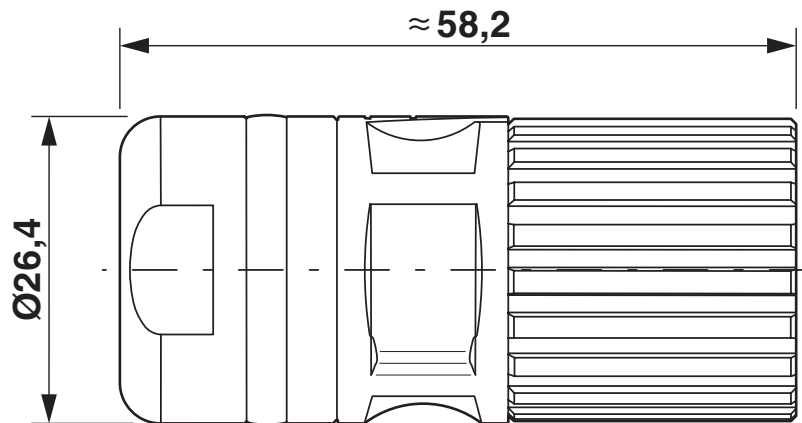

Technical drawings can be found under Downloads


CA-19S1N128008 - Cable connector

1619635

<https://www.phoenixcontact.com/pc/products/1619635>



Schematic diagram

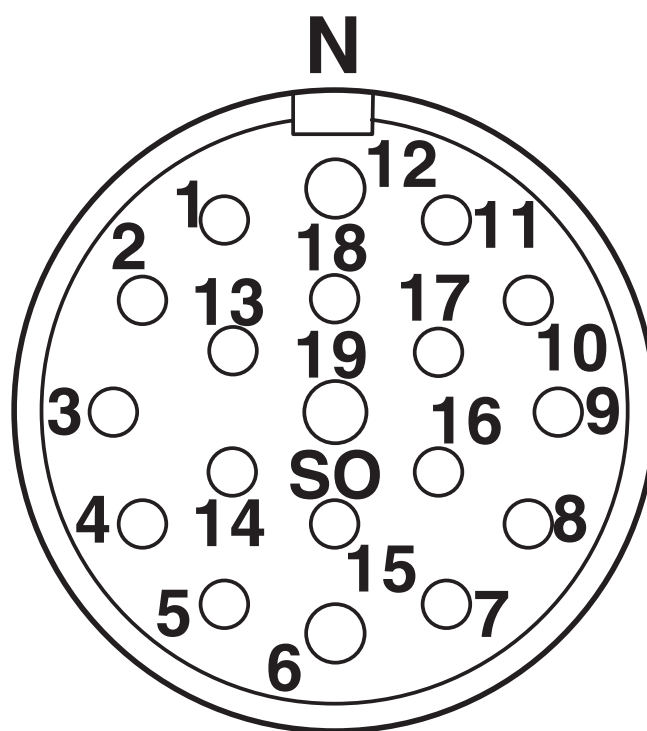

Connector pin assignment

CA-19S1N128008 - Cable connector



1619635

<https://www.phoenixcontact.com/pc/products/1619635>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1619635>

 cUL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	48 V	6 A	18 - 18	-
Signal	48 V	5 A	18 - 18	-

 UL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	48 V	10 A	18 - 18	-
Signal	48 V	8 A	18 - 18	-

cULus Recognized				
-------------------------	--	--	--	--

CA-19S1N128008 - Cable connector



1619635

<https://www.phoenixcontact.com/pc/products/1619635>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

CA-19S1N128008 - Cable connector



1619635

<https://www.phoenixcontact.com/pc/products/1619635>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	c5c3dcc9-a33e-4c78-bbdf-5cf92778296d

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com