

1619730

https://www.phoenixcontact.com/us/products/1619730

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, Screw locking mechanism, No. of pos. : 17, Direction of rotation: Standard, contact connection type: Socket, Solder connection, cable diameter range: 4 mm ... 6 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243782

#### Your advantages

- · Safe use in the field, thanks to high degree of protection
- · Connector for flexible on-site assembly
- · Consistent EMC protection for reliable transmission of signals
- · Solder connection: proven connection technology for various litz wires

#### Commercial data

Item number	1619730
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAEA
Catalog page	Page 87 (C-2-2019)
GTIN	4046356821872
Weight per piece (including packing)	98.3 g
Weight per piece (excluding packing)	98.3 g
Customs tariff number	85366990
Country of origin	DE



https://www.phoenixcontact.com/us/products/1619730



#### Technical data

_				
$\mathbf{\nu}$	radı	ıct.	nrc	perties
	ıout	ıvı	$\nu$	טכו ווכס

Product type	Circular connector (cable-side)
Connector	
Connection 1	
Head design	Socket
Insulating body	
Coding	N
Insulation body material	PBT
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Socket
Application	Signal
Number of positions	17
Direction of rotation	Standard
Connection profile	17
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter Signal contacts	1 mm
Litz wire cross-section Signal contacts max.	1 mm²
Nominal current per signal contact	8 A
Housing	
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	Screw locking mechanism
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

4 mm ... 6 mm

NBR

Environmental and real-life conditions

External cable diameter

Seal material

Seal



1619730

https://www.phoenixcontact.com/us/products/1619730

Ambient conditions

Ambient temperature (operation) -40 °C ... 125 °C


1619730

https://www.phoenixcontact.com/us/products/1619730



### Drawings

#### Dimensional drawing

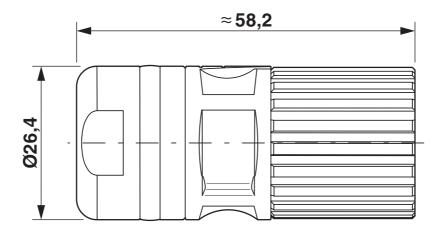


Technical drawings can be found under Downloads



https://www.phoenixcontact.com/us/products/1619730



#### Schematic diagram

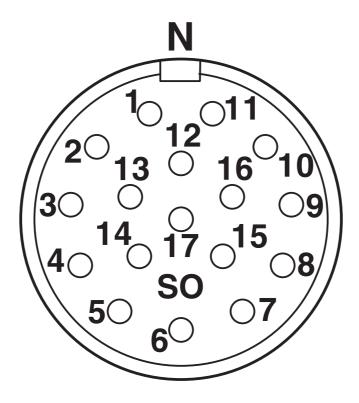

Connector pin assignment



1619730

https://www.phoenixcontact.com/us/products/1619730

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1619730

.71	<b>cUL Recognized</b> Approval ID: E335019-20141210			
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	48 V	5 A	- 18	-

<b>7.1</b>	UL Recognized Approval ID: E335019-20141210				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		48 V	8 A	- 18	-

ᆈᄟ	 Dago	anized



1619730

https://www.phoenixcontact.com/us/products/1619730

### Classifications

UNSPSC 21.0

#### **ECLASS**

E	ECLASS-11.0	27440102
Е	ECLASS-12.0	27440116
Е	ECLASS-13.0	27440116
ETIM		
Е	TIM 9.0	EC002635
UNSF	PSC	

39121400



1619730

https://www.phoenixcontact.com/us/products/1619730

### Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com