

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector rear mounting, series: CA, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 12, Direction of rotation: Standard, contact connection type: Pin, Solder connection, Axial seal, Central fixing, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243841

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Solder connection: proven connection technology for various litz wires
- Application-specific wall mounting optionally with thread or anti-rotation protection and lock nut

Commercial data

Item number	1619789
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAER
Catalog page	Page 102 (C-2-2019)
GTIN	4046356821285
Weight per piece (including packing)	52.5 g
Weight per piece (excluding packing)	49 g
Customs tariff number	85366990
Country of origin	DE

# CA-12P1N12HZ00 - Device connector rear mounting



1619789

<https://www.phoenixcontact.com/us/products/1619789>

## Technical data

### Product properties

Product type	Circular connectors (device side)
Data management status	
Article revision	06

### Connection data

Conductor connection	
Connection method	Solder connection
Contact connection type	Pin

### Connector

Insulating body	
Coding	N
Insulation body material	PBT
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Pin
Application	Signal
Number of positions	12
Direction of rotation	Standard
Connection profile	12
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter	1 mm
Signal contacts	
Litz wire cross-section	1 mm <sup>2</sup>
Signal contacts max.	
Nominal current per signal contact	8 A

### Housing

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	for standard and SPEEDCON interlock
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

# CA-12P1N12HZ00 - Device connector rear mounting



1619789

<https://www.phoenixcontact.com/us/products/1619789>

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------


# CA-12P1N12HZ00 - Device connector rear mounting

1619789

<https://www.phoenixcontact.com/us/products/1619789>

## Drawings


Schematic diagram

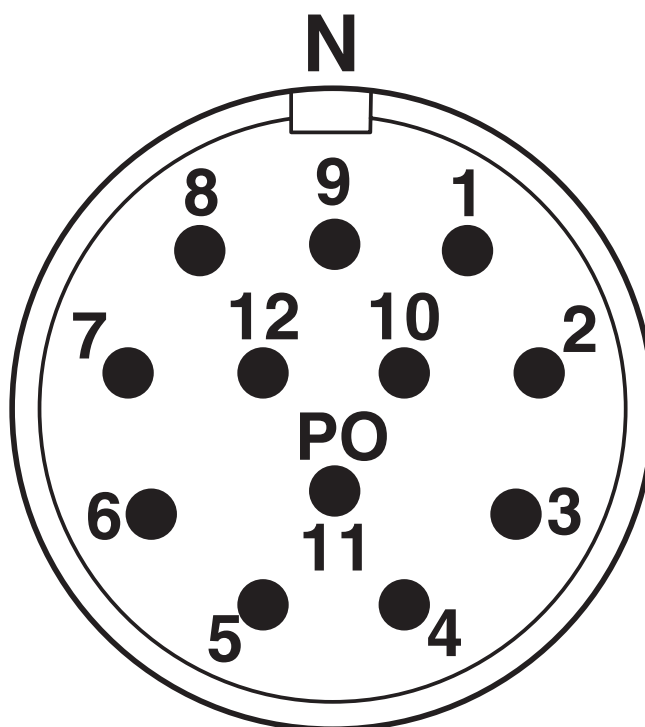


Connector pin assignment

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1619789>

<div> <b>cUL Recognized</b> Approval ID: E335019-20141210</div>				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	48 V	6 A	18 - 18	-

<div> <b>UL Recognized</b> Approval ID: E335019-20141210</div>				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	48 V	8 A	18 - 18	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# CA-12P1N12HZ00 - Device connector rear mounting



1619789

<https://www.phoenixcontact.com/us/products/1619789>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	5fc781a3-2a22-44ab-8d25-4a58218826bb

# CA-12P1N12HZ00 - Device connector rear mounting



1619789

<https://www.phoenixcontact.com/us/products/1619789>

## Accessories

### SF-Z0019 - Protective cap

1607449

<https://www.phoenixcontact.com/us/products/1607449>



Plastic protection cap, with eye, IP40 for connectors with M23 external thread, RF, SF series

---

### RC-Z2469 - Protective cap

1611797

<https://www.phoenixcontact.com/us/products/1611797>



Plastic protection cap, antistatic, for RF, SF, CA, RC series connectors, with M23 external thread

# CA-12P1N12HZ00 - Device connector rear mounting



1619789

<https://www.phoenixcontact.com/us/products/1619789>

## RC-Z2104 - Metal protective cap

1604260

<https://www.phoenixcontact.com/us/products/1604260>



Metal protective cap, M23, degree of protection: IP67, series: RC, UC, RF, SF, NC, RM, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241739

---

## RC-Z2068 - Metal protective cap

1604236

<https://www.phoenixcontact.com/us/products/1604236>



Metal protective cap, M23, degree of protection: IP67, series: RC, UC, RF, SF, NC, RM, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241735

# CA-12P1N12HZ00 - Device connector rear mounting



1619789

<https://www.phoenixcontact.com/us/products/1619789>

## CA-Z0110 - Color coding

1620700

<https://www.phoenixcontact.com/us/products/1620700>

Color coding, color: green



---

## CA-Z0111 - Color coding

1620701

<https://www.phoenixcontact.com/us/products/1620701>

Color coding, color: orange



## CA-12P1N12HZ00 - Device connector rear mounting

1619789

<https://www.phoenixcontact.com/us/products/1619789>



### CA-Z0112 - Color coding

1620702

<https://www.phoenixcontact.com/us/products/1620702>

Color coding, color: black



---

### CA-Z0001 - Contact removal tool

1620699

<https://www.phoenixcontact.com/us/products/1620699>



Unlocking tool for contact carriers for snapping in the M23 signal device connectors

# CA-12P1N12HZ00 - Device connector rear mounting



1619789

<https://www.phoenixcontact.com/us/products/1619789>

## PROT-M23PRO-OT-IP20 - Plastic protective cap

1055753

<https://www.phoenixcontact.com/us/products/1055753>

Plastic protective cap, M23, degree of protection: IP20, series: M23 PRO



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)