

1620119

https://www.phoenixcontact.com/us/products/1620119

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Coupler connector, series: CA, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 6, Direction of rotation: Standard, contact connection type: Socket, Solder connection, cable diameter range: 6 mm ... 10 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1244009

Your advantages

- · Safe use in the field, thanks to high degree of protection
- · Connector for flexible on-site assembly
- · Consistent EMC protection for reliable transmission of signals
- · Solder connection: proven connection technology for various litz wires

Commercial data

Item number	1620119
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAEG
Catalog page	Page 88 (C-2-2019)
GTIN	4046356819251
Weight per piece (including packing)	93.8 g
Weight per piece (excluding packing)	90.5 g
Customs tariff number	85366990
Country of origin	DE



1620119

https://www.phoenixcontact.com/us/products/1620119

Technical data

$\overline{}$					
\mathbf{P}	rodu	ıct.	nrc	nar	tıΔc
	ıouu	ıvı	ν	וסטו	เเธอ

Product type	Circular connector (cable-side)
Connector	
Connection 1	
Head design	Socket
Insulating body	
Coding	N
Insulation body material	РВТ
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Socket
Application	Signal
Number of positions	6
Direction of rotation	Standard
Connection profile	6
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter Signal contacts	2 mm
Litz wire cross-section Signal contacts max.	2.5 mm²
Nominal current per signal contact	20 A
Housing	
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	for standard and SPEEDCON interlock
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

6 mm ... 10 mm

NBR

Environmental and real-life conditions

External cable diameter

Seal material



1620119

https://www.phoenixcontact.com/us/products/1620119

Ambient conditions

Ambient temperature (operation) -40 °C ... 125 °C




https://www.phoenixcontact.com/us/products/1620119



Drawings

Schematic diagram

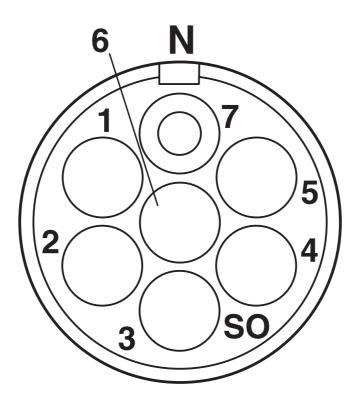


Connector pin assignment



https://www.phoenixcontact.com/us/products/1620119



Dimensional drawing

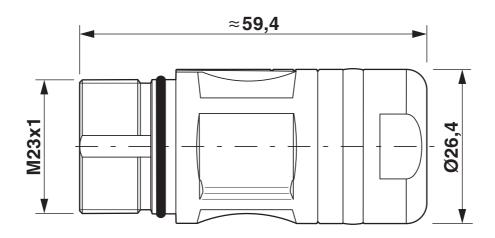

Technical drawings can be found under Downloads



1620119

https://www.phoenixcontact.com/us/products/1620119

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1620119

. 51 1	cUL Recognized Approval ID: E335019-20141210				
	Nomi	nal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	48 V		10 A	- 14	-

71	UL Recognized Approval ID: E335019-20141210				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		48 V	20 A	- 14	-

cULus Recognized



1620119

https://www.phoenixcontact.com/us/products/1620119

Classifications

ECLASS

UNSPSC 21.0

EC	CLASS-11.0	27440102
EC	CLASS-12.0	27440116
EC	CLASS-13.0	27440116
ETIM		
ET	TIM 9.0	EC002635
UNSP	PSC	

39121400



1620119

https://www.phoenixcontact.com/us/products/1620119

Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com