

CA-12S2N1280DN - Cable connector



1621435

<https://www.phoenixcontact.com/pc/products/1621435>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, Screw locking mechanism, No. of pos. : 12, Direction of rotation: Counter direction, contact connection type: Socket, Solder connection, cable diameter range: 3 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1244399

Commercial data

Item number	1621435
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ABRAEA
GTIN	4046356932493
Weight per piece (including packing)	95.6 g
Weight per piece (excluding packing)	92.4 g
Customs tariff number	85366990
Country of origin	DE

CA-12S2N1280DN - Cable connector



1621435

<https://www.phoenixcontact.com/pc/products/1621435>

Technical data

Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

Electrical properties

Contact

Contact diameter	1 mm
Min. cross section	0.08 mm ²
Max. cross section	1 mm ²
Max. current	8 A
Nominal voltage U _N	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

Connector

Direction of rotation	Counter direction
-----------------------	-------------------

Insulating body

Coding	N
Insulation body material	PBT
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Socket
Application	Signal
Number of positions	12
Direction of rotation	Counter direction
Connection profile	12
Contact diameter	1 mm
Litz wire cross-section	0.08 mm ²
Litz wire cross-section	1 mm ²
Rated current	8 A
Rated voltage	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing

CA-12S2N1280DN - Cable connector



1621435

<https://www.phoenixcontact.com/pc/products/1621435>

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	Screw locking mechanism
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

Seal

External cable diameter	3 mm ... 14.5 mm
Seal material	NBR

CA-12S2N1280DN - Cable connector


1621435

<https://www.phoenixcontact.com/pc/products/1621435>



Drawings

Dimensional drawing

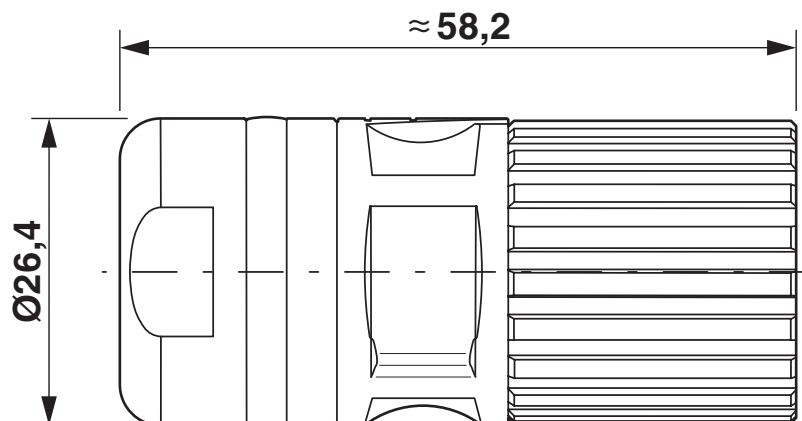

Technical drawings can be found under Downloads


CA-12S2N1280DN - Cable connector

1621435

<https://www.phoenixcontact.com/pc/products/1621435>



Schematic diagram

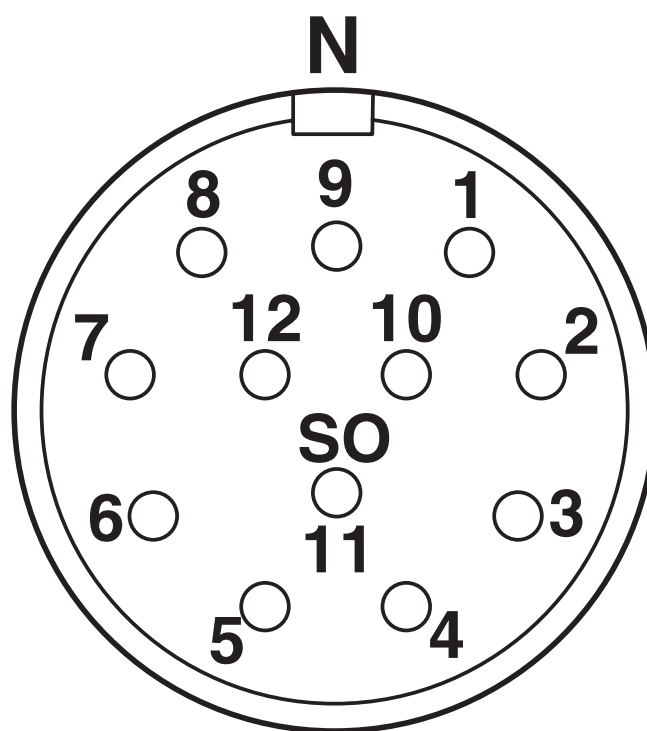

Contact chamber numbering (view of plug-in side), socket counter direction

CA-12S2N1280DN - Cable connector



1621435

<https://www.phoenixcontact.com/pc/products/1621435>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1621435>

 cUL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	48 V	6 A	- 18	-

 UL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	48 V	8 A	- 18	-

cULus Recognized				
-------------------------	--	--	--	--

CA-12S2N1280DN - Cable connector



1621435

<https://www.phoenixcontact.com/pc/products/1621435>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

CA-12S2N1280DN - Cable connector



1621435

<https://www.phoenixcontact.com/pc/products/1621435>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f16a9389-b39d-40c6-8623-7d0733602462

CA-12S2N1280DN - Cable connector

1621435

<https://www.phoenixcontact.com/pc/products/1621435>



Accessories

SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/pc/products/1607456>

Torque screwdriver, series: RC, UC, SH, SF



SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/pc/products/1607455>

Hook wrench, series: RC, UC, RF, SF



CA-12S2N1280DN - Cable connector

1621435

<https://www.phoenixcontact.com/pc/products/1621435>




RF-Z0014 - Color coding

1620588

<https://www.phoenixcontact.com/pc/products/1620588>

Color coding, color: green



RF-Z0015 - Color coding

1620592

<https://www.phoenixcontact.com/pc/products/1620592>

Color coding, color: orange



CA-12S2N1280DN - Cable connector

1621435

<https://www.phoenixcontact.com/pc/products/1621435>



RF-Z0016 - Color coding

1620593

<https://www.phoenixcontact.com/pc/products/1620593>

Color coding, color: black



RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/pc/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242369

CA-12S2N1280DN - Cable connector

1621435

<https://www.phoenixcontact.com/pc/products/1621435>



CA-Z0077 - Metal protective cap

1627224

<https://www.phoenixcontact.com/pc/products/1627224>



Metal protective cap, degree of protection: IP67, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245447

PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/pc/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com