

# SH-8EPC58A8LDLS - Cable connector

1621529

<https://www.phoenixcontact.com/us/products/1621529>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: SH, straight long, shielded: yes, SPEEDCON, No. of pos.: 4+4+4+PE / 3+N+PE, Direction of rotation: Standard, contact connection type: Pin, Crimp connection, cable diameter range: 7.5 mm ... 18 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1244425

## Your advantages

- Transmission of signals, data, and power in just a single connector
- CAT5 data interface for up to 100 Mbps
- Reduced connection time with optional SPEEDCON fast locking system
- Safe use in the field, thanks to high degree of protection
- Consistent EMC protection for reliable connection solutions in the industrial environment

## Commercial data

Item number	1621529
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB33
Product key	ABRCDB
Catalog page	Page 118 (C-2-2019)
GTIN	4046356936521
Weight per piece (including packing)	141.3 g
Weight per piece (excluding packing)	111.11 g
Customs tariff number	85366990
Country of origin	DE

## Technical data

### Notes

#### Safety note

Safety note	<p><b>WARNING:</b> The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"><li>• <b>WARNING:</b> Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li><li>• <b>WARNING:</b> Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li><li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li><li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li><li>• Assembled products may not be manipulated or improperly opened.</li><li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li><li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li><li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li><li>• Ensure that the protective or functional ground has been properly connected.</li><li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li><li>• Only use tools recommended by Phoenix Contact</li><li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li><li>• Operate the connector only when it is fully plugged in and interlocked.</li><li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li><li>• Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li><li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).</li></ul>
-------------	---

# SH-8EPC58A8LDLS - Cable connector

1621529

<https://www.phoenixcontact.com/us/products/1621529>



## Product properties

Product type	Circular connector (cable-side)
<b>Connector</b>	
<b>Insulating body</b>	
Note	
Order information: Crimp contacts, 4x Ø 0.8 mm, 4x Ø 1 mm, 5x Ø 2 mm, order separately	
Protection against electric shock	
IEC 61984 and VDE 0623	
Data rate	
100 Mbps	
Coding	
N	
Insulation body material	
PA 6.6	
Insertion/withdrawal cycles	
100	
Connection method	
Crimp connection	
Contact switching type	
Pin	
Application	
Hybrid	
Number of positions	
13	
Direction of rotation	
Standard	
Connection profile	
4+4+4+PE / 3+N+PE	
Contact diameter <b>Power contacts</b>	
2 mm	
Litz wire cross-section <b>Power contacts</b> min.	
0.25 mm <sup>2</sup>	
Litz wire cross-section <b>Power contacts</b> max.	
4 mm <sup>2</sup>	
Rated current <b>Power contacts</b>	
30 A	
Note	
for max. connection cross section	
Rated surge voltage	
6 kV	
Rated voltage (II/3) power contact	
850 V DC	
Rated voltage (III/3) power contact	
630 V AC	
Contact diameter <b>Signal contacts</b>	
1 mm	
Litz wire cross-section <b>Signal contacts</b> min.	
0.06 mm <sup>2</sup>	
Litz wire cross-section <b>Signal contacts</b> max.	
1 mm <sup>2</sup>	
Nominal current per signal contact	
8 A	
Note	
for max. connection cross section	
Rated surge voltage	
1.5 kV	
Rated voltage (III/3) signal contact	
50 V	
Contact diameter <b>Data contacts</b>	
0.8 mm	
Litz wire cross-section <b>Data contacts</b> min.	
0.08 mm <sup>2</sup>	
Litz wire cross-section <b>Data contacts</b> max.	
0.5 mm <sup>2</sup>	
Rated current per data contact at 25°C	
3.6 A	
Note	
for max. connection cross section	
Rated voltage <b>Data contacts</b>	
50 V	
Rated surge voltage	
1.5 kV	

# SH-8EPC58A8LDLS - Cable connector

1621529

<https://www.phoenixcontact.com/us/products/1621529>



Installation height	2000 m
---------------------	--------

## Housing

Notes on operation	The suitability for assembly must be checked when fully assigned with maximum wire cross sections.
Housing material	Metal
Type of locking	SPEEDCON
Pg screw connection	none
Degree of protection (plugged in)	IP67
	IP68
	IP69K
Thread type	M23

## Seal

External cable diameter	7.5 mm ... 18 mm
-------------------------	------------------

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 115 °C (see derating curve)
Ambient temperature (storage/transport)	15 °C ... 25 °C
Permissible humidity (storage/transport)	50 % ... 65 %

# SH-8EPC58A8LDLS - Cable connector


1621529

<https://www.phoenixcontact.com/us/products/1621529>



## Drawings

Dimensional drawing

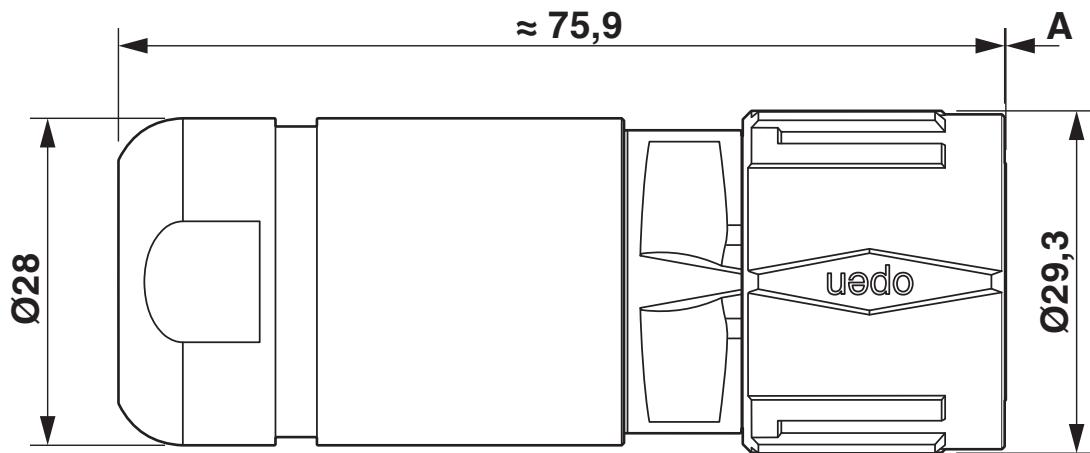

Pin version: dimension A = 0.2 mm, socket version: dimension A = 0 mm


# SH-8EPC58A8LDLS - Cable connector

1621529

<https://www.phoenixcontact.com/us/products/1621529>



Schematic diagram

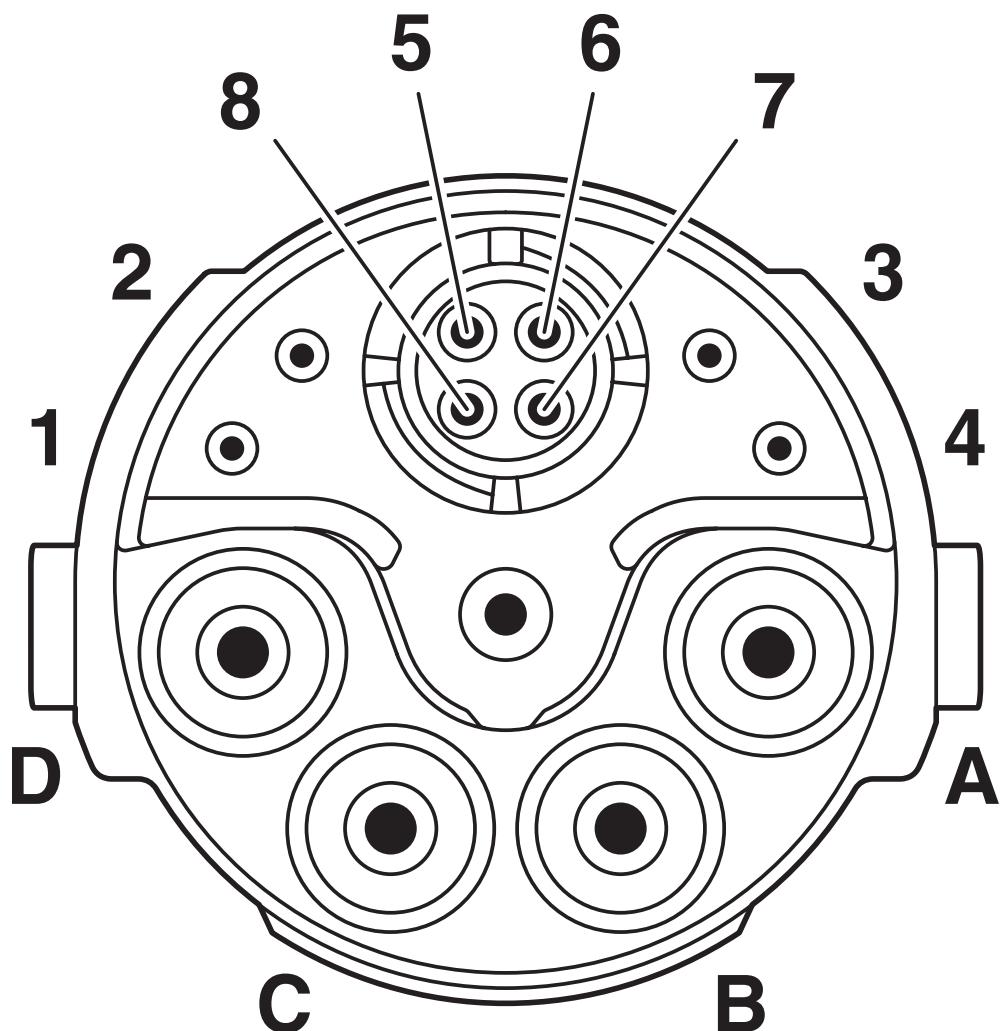

Pin assignment of pin, CAT5


# SH-8EPC58A8LDLS - Cable connector



1621529

<https://www.phoenixcontact.com/us/products/1621529>

Diagram

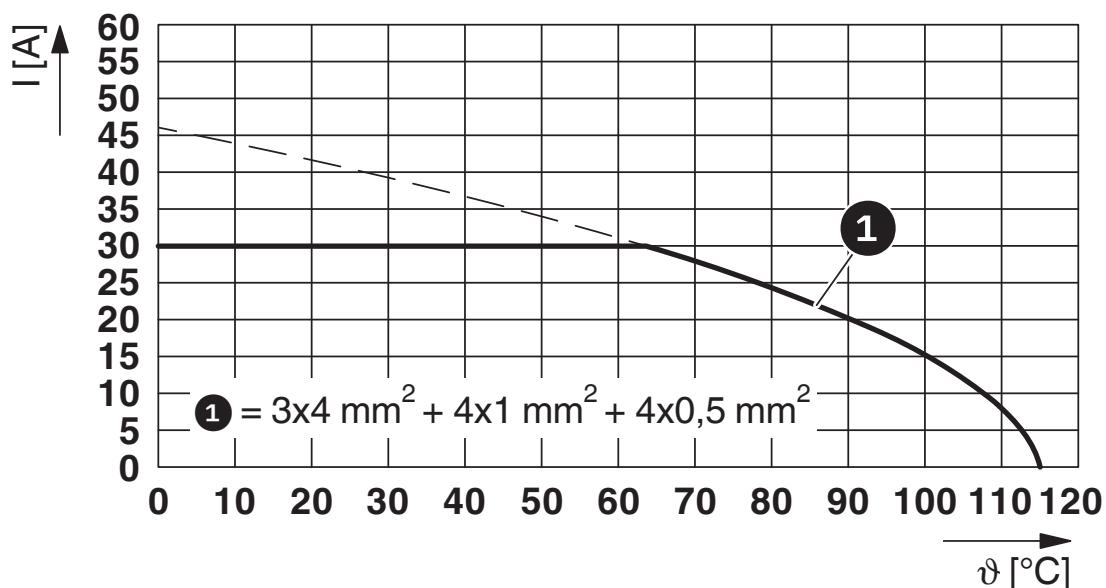

$I$  = current strength,  $\vartheta$  = ambient temperature, power contacts A-C: 3 x up to 30 A, signal contacts: 4 x 2 A constant, data contacts: 4 x 1 A constant

# SH-8EPC58A8LDLS - Cable connector

1621529

<https://www.phoenixcontact.com/us/products/1621529>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1621529>

<b>cUL Recognized</b> Approval ID: E153698-20181206				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Power	600 V	21.4 A	- 12	-
Control	50 V	4 A	- 18	-

<b>UL Recognized</b> Approval ID: E153698-20181206				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $mm^2$
Power	600 V	24 A	- 12	-
Control	50 V	4 A	- 18	-

<b>cULus Recognized</b>
-------------------------

# SH-8EPC58A8LDLS - Cable connector

1621529

<https://www.phoenixcontact.com/us/products/1621529>



## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SH-8EPC58A8LDLS - Cable connector

1621529

<https://www.phoenixcontact.com/us/products/1621529>



## Environmental product compliance

REACH SVHC

Lead 7439-92-1

China RoHS

Environmentally Friendly Use Period = 50 years

For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)