

1624044

https://www.phoenixcontact.com/us/products/1624044

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector front mounting, series: CA, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 6, Direction of rotation: Standard, contact connection type: Pin, Solder connection, Axial seal, Central fastening M20 x 1.5, can be positioned via a locking nut, coding: N

Your advantages

- · Safe use in the field, thanks to high degree of protection
- · Connector for flexible on-site assembly
- · Consistent EMC protection for reliable transmission of signals
- Solder connection: proven connection technology for various litz wires

Commercial data

Item number	1624044
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAEL
Catalog page	Page 98 (C-2-2019)
GTIN	4055626227641
Weight per piece (including packing)	38.2 g
Weight per piece (excluding packing)	38.2 g
Customs tariff number	85366990
Country of origin	DE



1624044

https://www.phoenixcontact.com/us/products/1624044

Technical data

Product properties

	Product type	Circular connectors (device side)
Ma	aterial specifications	
	Flammability rating according to UL 94	V0

Connector

Insulating body

Coding	N
Insulation body material	PBT
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Pin
Application	Signal
Number of positions	6
Direction of rotation	Standard
Connection profile	6
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter Signal contacts	2 mm
Litz wire cross-section Signal contacts max.	2.5 mm²
Nominal current per signal contact	20 A

Housing

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	for standard and SPEEDCON interlock
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23




1624044

https://www.phoenixcontact.com/us/products/1624044

Drawings

Dimensional drawing

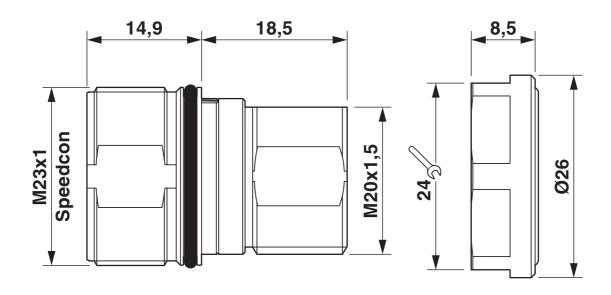


Technical drawings can be found under Downloads



1624044

https://www.phoenixcontact.com/us/products/1624044

Schematic diagram

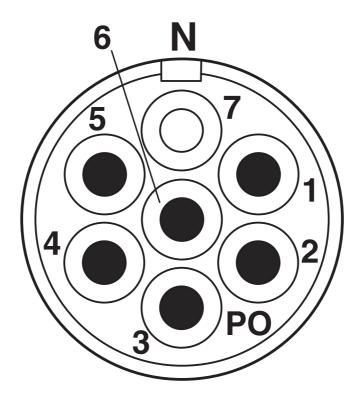


Connector pin assignment



1624044

https://www.phoenixcontact.com/us/products/1624044

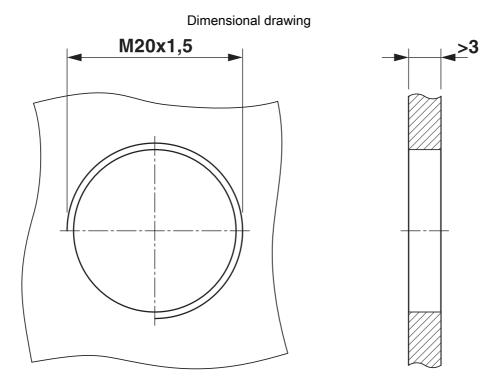

Installation dimensions



1624044

https://www.phoenixcontact.com/us/products/1624044

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1624044

.71	cUL Recognized Approval ID: E335019-20141210			
	Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
	48 V	10 A	14 - 14	-

71	UL Recognized Approval ID: E335019-20141210					
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²	
		48 V	20 A	14 - 14	-	

cULus Recognized



1624044

https://www.phoenixcontact.com/us/products/1624044

Classifications

ECLASS

	ECLASS-11.0	27440109		
	ECLASS-12.0	27440109		
	ECLASS-13.0	27440109		
ETIM				
	ETIM 9.0	EC003569		
UN	ISPSC			
	UNSPSC 21.0	39121400		



1624044

https://www.phoenixcontact.com/us/products/1624044

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	4f8cfe71-f1ba-4e14-8312-dcb2a472cf40



1624044

https://www.phoenixcontact.com/us/products/1624044

Accessories

SF-Z0019 - Protective cap

1607449

https://www.phoenixcontact.com/us/products/1607449



Plastic protection cap, with eye, IP40 for connectors with M23 external thread, RF, SF series

RC-Z2469 - Protective cap

1611797

https://www.phoenixcontact.com/us/products/1611797



Plastic protection cap, antistatic, for RF, SF, CA, RC series connectors, with M23 external thread



1624044

https://www.phoenixcontact.com/us/products/1624044

RC-Z2104 - Metal protective cap

1604260

https://www.phoenixcontact.com/us/products/1604260



Metal protective cap, M23, degree of protection: IP67, series: RC, UC, RF, SF, NC, RM, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241739

RC-Z2068 - Metal protective cap

1604236

https://www.phoenixcontact.com/us/products/1604236



Metal protective cap, M23, degree of protection: IP67, series: RC, UC, RF, SF, NC, RM, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241735



1624044

https://www.phoenixcontact.com/us/products/1624044

CA-Z0001 - Contact removal tool

1620699

https://www.phoenixcontact.com/us/products/1620699



Unlocking tool for contact carriers for snapping in the M23 signal device connectors

RF-Z0017 - Color coding

1620624

https://www.phoenixcontact.com/us/products/1620624

Color coding, color: green





1624044

https://www.phoenixcontact.com/us/products/1624044

RF-Z0018 - Color coding

1620625

https://www.phoenixcontact.com/us/products/1620625

Color coding, color: orange



RF-Z0019 - Color coding

1620626

https://www.phoenixcontact.com/us/products/1620626

Color coding, color: anthracite





1624044

https://www.phoenixcontact.com/us/products/1624044

PROT-M23PRO-OT-IP20 - Plastic protective cap

1055753

https://www.phoenixcontact.com/us/products/1055753



Plastic protective cap, M23, degree of protection: IP20, series: M23 PRO

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com