

EV-T1L2CC-DC60A-6,0M6ASBK01 - DC charging cable



1627346

<https://www.phoenixcontact.com/pc/products/1627346>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect, DC charging cable with vehicle connector, open cable end, CCS type 1, SAE J1772, IEC 62196-3, cable: 6 m, NOTE: Cable management may be required.

Product description

DC charging cable with vehicle charging connector and free cable end for fast charging of electric vehicles (EV) with direct current (DC) via CCS type 1 vehicle charging inlets, for installation at charging stations for e-mobility (EVSE)

Your advantages

- Consistent design of all Phoenix Contact Vehicle Connectors and Infrastructure Plugs
- Silver-plated surface of the power and signal contacts
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Material data available in the IMDS (International Material Data System of the automotive industry)
- Convenient handling, thanks to the ergonomic handle and additional, rubber grip components
- Integrated temperature sensors for monitoring the temperature at the power contacts

Commercial data

Item number	1627346
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	XWBAAB
GTIN	4055626310510
Weight per piece (including packing)	7,103 g
Weight per piece (excluding packing)	7,103 g
Customs tariff number	85444290
Country of origin	DE

EV-T1L2CC-DC60A-6,0M6ASBK01 - DC charging cable



1627346

<https://www.phoenixcontact.com/pc/products/1627346>

Technical data

Notes

General	NOTE: Cable management may be required.
General	Cable management is required in certain regions if the cable length exceeds 5.0 m (Switzerland) or 7.5 m (USA) (IEC 61851-1).

Product properties

Product type	DC charging cable
Product family	CHARX connect
Application	DC charging cable with vehicle connector, open cable end Combined Charging System
Charging standard	CCS type 1
Charging mode	Mode 4

Electrical properties

Type of charging current	DC
Charging power	60 kW
Charging current	60 A

Temperature sensors (Pt 1000)

Sensor type	Pt 1000
Standards/regulations	DIN EN 60751
Attachment point	Sensor for the DC contacts
Switch-off temperature	90 °C ±1 K (equivalent to a Pt 1000 value of 1346.5 Ω)
Long-term stability	0.06 % (after 1000 hours at 130 °C)
Recommended measured current	1 mA (1 V at 0 °C)
Coefficient	3850 ppm/K
Ambient temperature	-50 °C ... 130 °C (Operation)

Cable/line

Cable length	6 m
Stripping length of the sheath	130 mm ±20 mm
Stripping length	130 mm ±20 mm

Standards and regulations

Standards

Standards/regulations	SAE J1772 IEC 62196-3
-----------------------	--------------------------


EV-T1L2CC-DC60A-6,0M6ASBK01 - DC charging cable

1627346

<https://www.phoenixcontact.com/pc/products/1627346>

Drawings

Connection diagram

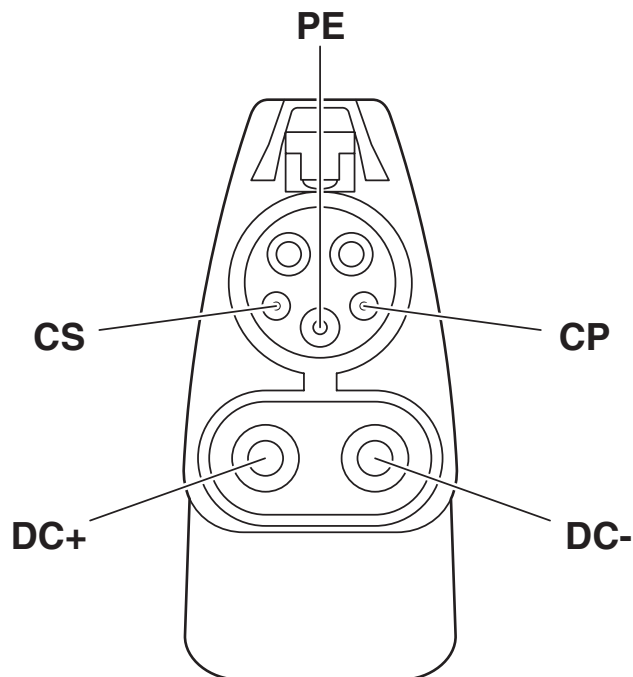


Pin assignment of the Vehicle Connector

EV-T1L2CC-DC60A-6,0M6ASBK01 - DC charging cable

1627346


<https://www.phoenixcontact.com/pc/products/1627346>

Schematic diagram

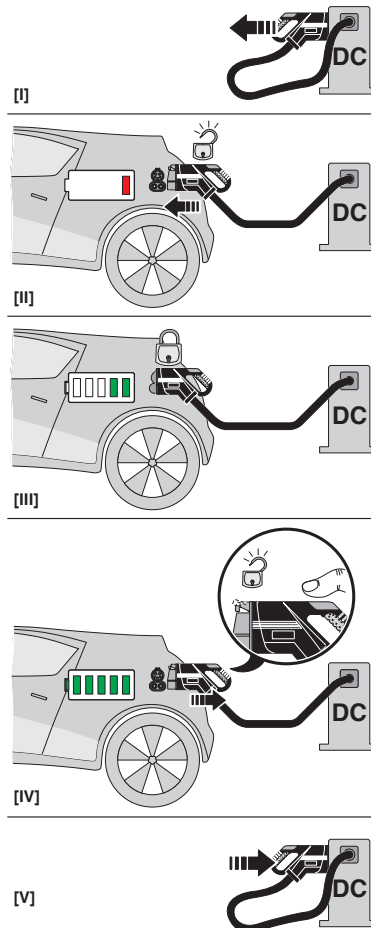

Operating instructions

Schematic diagram

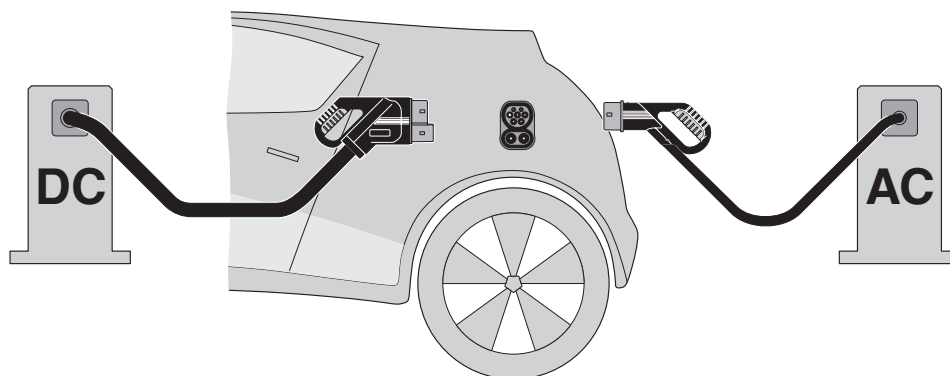

"Combined Charging System" principle


EV-T1L2CC-DC60A-6,0M6ASBK01 - DC charging cable



1627346

<https://www.phoenixcontact.com/pc/products/1627346>

Schematic diagram

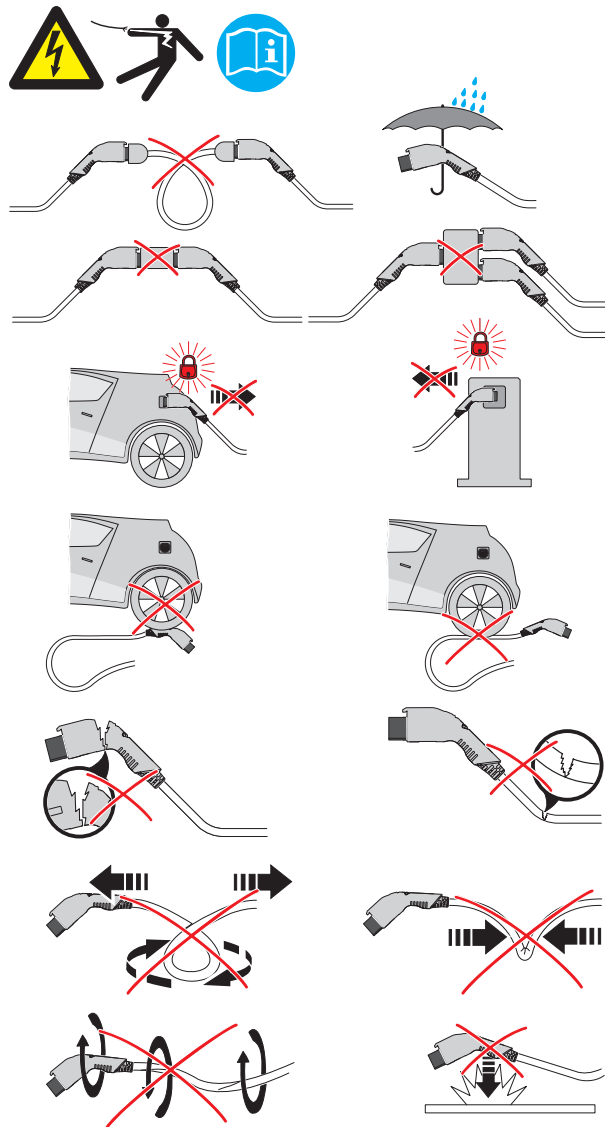

Warnings regarding use


EV-T1L2CC-DC60A-6,0M6ASBK01 - DC charging cable



1627346

<https://www.phoenixcontact.com/pc/products/1627346>

Dimensional drawing

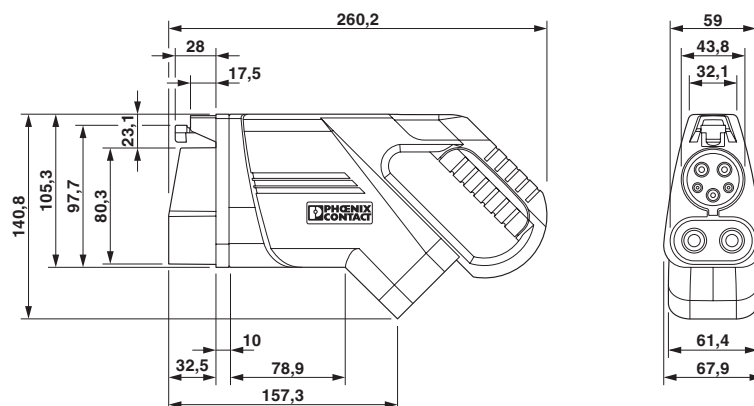

Make sure that the vehicle charging connector is placed in an appropriate charging connector holder, which ensures a minimum protection rating of IP24 in accordance with IEC 61851-1, for the entire time between charging. To create this charging connector holder, use the dimensions of the vehicle charging connector. Detailed dimensions can also be found in the Download area.

EV-T1L2CC-DC60A-6,0M6ASBK01 - DC charging cable



1627346
<https://www.phoenixcontact.com/pc/products/1627346>

Environmental product compliance

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com