

# Q 0,75/4IDC/18-18KU-KU BK - Conductor connectors



1642140

<https://www.phoenixcontact.com/us/products/1642140>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Conductor connectors, connection method: IDC connection, 250 V, 9 A, PA, black, external cable diameter: 4 mm ... 8 mm



## Your advantages

- Innovative and time saving - QUICKON fast connection for time saving of up to 80 % for on-site connection
- Robust throughout: housing with IP68/IP69K and IK07 protection for a wide range of applications
- Safer connection with mechanical coding to protect against mismatching, and touch-proof protection in accordance with DIN EN 0105
- Easy and safe - with the cable connector, you can repair or extend cables quickly, in combination with the connector as well as the coupling connection

## Commercial data

Item number	1642140
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF50
Product key	BF6HCB
Catalog page	Page 474 (C-2-2019)
GTIN	4017918923891
Weight per piece (including packing)	18 g
Weight per piece (excluding packing)	14.12 g
Customs tariff number	85366990
Country of origin	DE

# Q 0,75/4IDC/18-18KU-KU BK - Conductor connectors



1642140

<https://www.phoenixcontact.com/us/products/1642140>

## Technical data


### Product properties

Product type	Cable connector
Number of positions	4
Position marking	1, 2, 3, 4
Number of connections	4
Number of connections per position	1
Coding	no

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Dimensions

Dimensional drawing	
Width	15 mm
Height	15 mm
Length	67.5 mm
Diameter	15 mm

### Connection data

#### Connection technology

Frequency of connections between conductors of the same cross section	max. 10
---	---------

#### Conductor connection

Tightening torque	1.2 Nm
Tightening torque Union nut	1.2 Nm
Wrench size Union nut	15 mm
Wrench size Contact carrier	15 mm

### Electrical properties

Rated surge voltage (II/2)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (III/3)	4 kV
Rated current	9 A
Contact resistance	$\leq 5 \text{ m}\Omega$
rated voltage (II/2)	500 V
rated voltage (III/2)	400 V

# Q 0,75/4IDC/18-18KU-KU BK - Conductor connectors



1642140

<https://www.phoenixcontact.com/us/products/1642140>

Rated voltage (III/3)	250 V
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	400 V AC
	400 V DC
Nominal current $I_N$	9 A

## Material specifications

Color	black (RAL 9005)
Material Housing	PA
Material Contact	Steel
Material Contact surface	tin-plated
Flammability rating according to UL 94	V0
Material wire insulation	PVC / PE / rubber / TPE

## Cable/line

Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	VDE 0295 class 1 to 6/min. 0.15 mm
External cable diameter ( )	4 mm ... 8 mm
Wire diameter including insulation	1.3 mm ... 2.6 mm
Position marking	1, 2, 3, 4
Material wire insulation	PVC / PE


## Environmental and real-life conditions

### Ambient conditions


Degree of protection	IP65
	IP67
Ambient temperature (operation)	-40 °C ... 80 °C
Temperature when conductor connected	-5 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C

## Drawings

Dimensional drawing

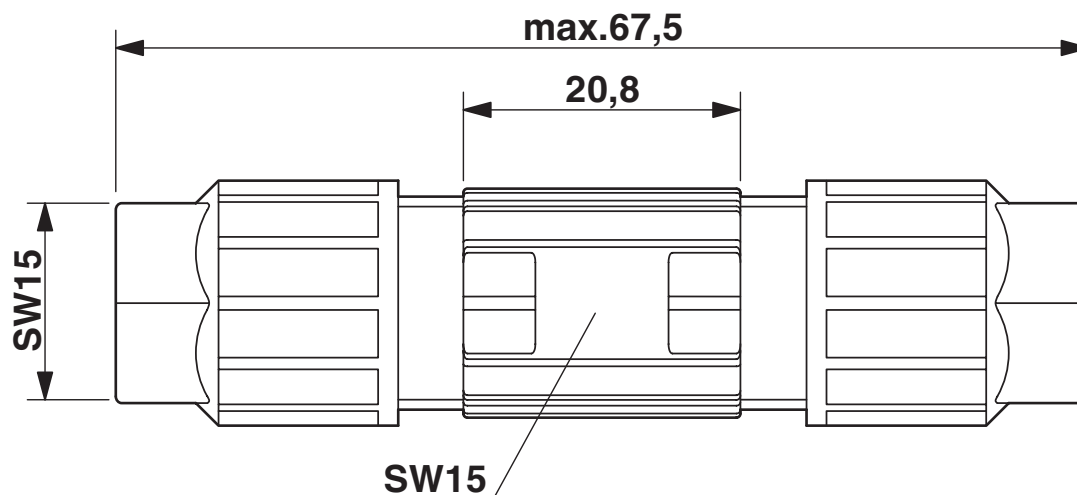

Functional drawing

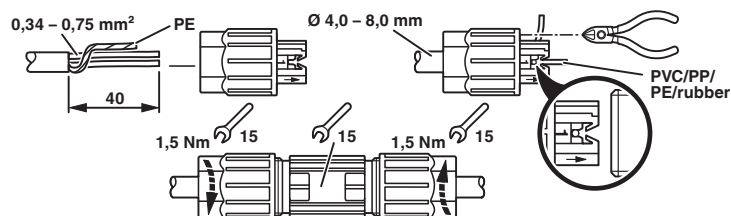

# Q 0,75/4IDC/18-18KU-KU BK - Conductor connectors



1642140

<https://www.phoenixcontact.com/us/products/1642140>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1642140>

	<b>cUL Recognized</b> Approval ID: FILE E 118976			
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	250 V	6 A	-	-

	<b>UL Recognized</b> Approval ID: FILE E 118976			
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	250 V	9 A	-	-

	<b>EAC</b> Approval ID: RU C-DE.AI30.B.01102			

	<b>EAC</b> Approval ID: EAC-Zulassung			

	<b>VDE Zeichengenehmigung</b> Approval ID: 40030930			
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	400 V	-	-	-

	<b>EAC</b> Approval ID: RU C-DE.A*30.B.01102			

	<b>EAC</b> Approval ID: RU C-DE.BL08.B.00511			

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# Q 0,75/4IDC/18-18KU-KU BK - Conductor connectors



1642140

<https://www.phoenixcontact.com/us/products/1642140>

## Classifications

### ECLASS

ECLASS-11.0	27440605
ECLASS-13.0	27440605
ECLASS-12.0	27440605

### ETIM

ETIM 9.0	EC002560
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# Q 0,75/4IDC/18-18KU-KU BK - Conductor connectors



1642140

<https://www.phoenixcontact.com/us/products/1642140>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)