

Housing - HC-B 32-TFQ-80/O1STM40S - 1645451

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON sleeve housing B32, for double locking latch, height 80 mm, without support 1x M40, lateral conductor exit

Key commercial data

package_quantity	10
GTIN	4017918913182

Technical data

Dimensions

Height	80 mm
Width	79 mm
Length	94 mm

Ambient conditions

Degree of protection for housing	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B32, DD144, M
Design	B32
Housing type	Sleeve housings
Locking type	For double locking latch
No. of cable exits	1
Cable exit	Lateral
Screw connection	None
Type of the screw connection	1x M40
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray

classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424

Housing - HC-B 32-TFQ-80/O1STM40S - 1645451

classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209

ETIM

ETIM 2.0	EC000437
ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

accessories

Full screw connection

HC-K-KV-M40(19-28) - 1690655



HC-M-KV-M40(19-27) - 1690590




HC-M-KV-M40(27-34) - 1607729



Housing - HC-B 32-TFQ-80/O1STM40S - 1645451

Drawings

Dimensioned drawing

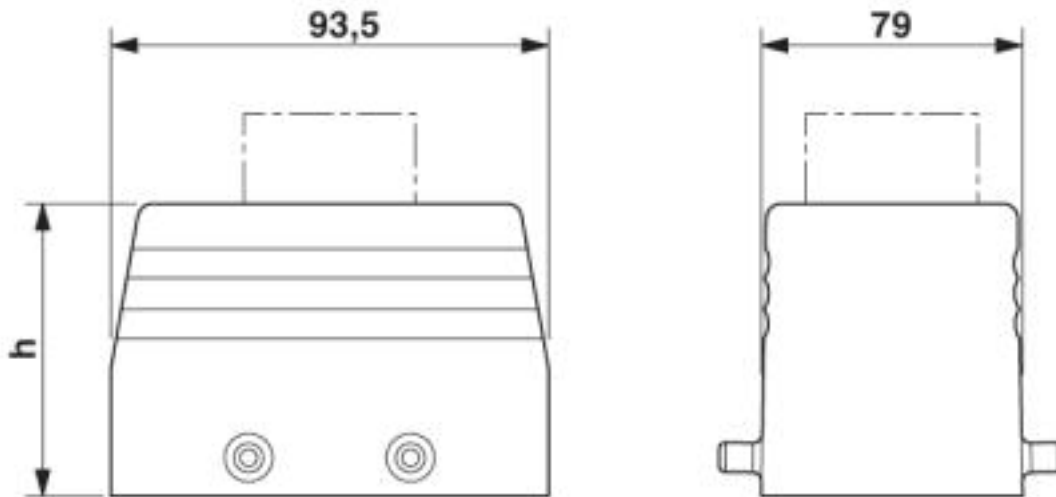

© Phoenix Contact 2013 - all rights reserved
<http://www.phoenixcontact.com>