

1646489

https://www.phoenixcontact.com/us/products/1646489

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON box mounting base B10, for double locking latch, height 52 mm, with supports 1xM20, with cover

### Commercial data

Item number	1646489
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	BF55
Product key	BF7AAC
Catalog page	Page 504 (C-4-2013)
GTIN	4017918985103
Weight per piece (including packing)	244.4 g
Weight per piece (excluding packing)	244.4 g
Customs tariff number	85389099
Country of origin	DE



https://www.phoenixcontact.com/us/products/1646489



### Technical data

### Notes

	General	For contact inserts HC-B10, BB18, DD42, M, K8/24
--	---------	--

### Product properties

Product type	Housing with locking latch
Housing type	Box mounting bases
Application	Standard
Туре	B10
No. of cable outlets	1
Type of the screw connection	1x M20
Protective cover	yes
Shielded	no
Cable outlet	Left (view of the opened protective cover)
Pg screw connection	none

### **Dimensions**

Dimensional drawing	93 0 0 0 05.5 82 40 52
Width	52 mm
Height	52 mm
Length	93 mm

### Material specifications

Seal material	NBR
Housing material	die-cast aluminum
Housing surface material	Powder-coated, gray
Material, protective cover	PA

### Mechanical properties

### Mechanical data

Type of the screw connection	1x M20
Locking type	Pin

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP65 (When plugged in)
Ambient temperature (operation)	-40 °C 125 °C





https://www.phoenixcontact.com/us/products/1646489



### Drawings

# Dimensional drawing 93

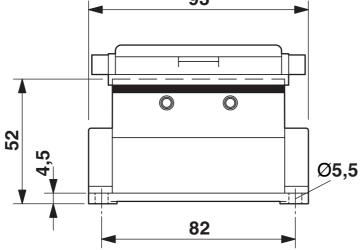



Dimensional drawing



1646489

https://www.phoenixcontact.com/us/products/1646489

### Classifications

### **ECLASS**

	ECLASS-11.0	27440202
	ECLASS-13.0	27440202
UNSPSC		



1646489

https://www.phoenixcontact.com/us/products/1646489

### Environmental product compliance

EU R	oHS
------	-----

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1646489

https://www.phoenixcontact.com/us/products/1646489

### Accessories

### G-INS-M20-S68N-PNES-GY - Cable gland

1411125

https://www.phoenixcontact.com/us/products/1411125



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 6 mm  $\dots$  12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver-grey RAL 7001

### G-INS-M20-S68N-PNES-BK - Cable gland

1411133

https://www.phoenixcontact.com/us/products/1411133



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 6 mm  $\dots$  12 mm, shielding: no, connecting thread: M20 x 1.5, color: jet black RAL 9005



https://www.phoenixcontact.com/us/products/1646489



### G-INS-M20-S68N-NNES-S - Cable gland

1411163

https://www.phoenixcontact.com/us/products/1411163



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 6 mm  $\dots$  12 mm, shielding: no, connecting thread: M20 x 1.5, color: silver, with O-ring

### HC-M-KV-M20(11-16) - Cable gland

1645998

https://www.phoenixcontact.com/us/products/1645998



Metal screw connection up to 5 bar, thread length: 6 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M20



https://www.phoenixcontact.com/us/products/1646489



### G-INSEC-M20-S68N-NCRS-S - Cable gland

1411189

https://www.phoenixcontact.com/us/products/1411189



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 9 mm  $\dots$  13 mm, shielding: yes, connecting thread: M20 x 1.5, color: silver, with O-ring

### G-INESR-M20-S68N-NEPDS-S - Cable gland

1415192

https://www.phoenixcontact.com/us/products/1415192



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 6 mm ... 13 mm, shielding: no, connecting thread: M20 x 1.5, color: silver, with external strain relief, with O-ring




1646489

https://www.phoenixcontact.com/us/products/1646489

### HC-M-KV-T-M20 - Cable gland

1646188

https://www.phoenixcontact.com/us/products/1646188





### REDUC-M-KV-M20/M16 - Reducing adapter

1647611

https://www.phoenixcontact.com/us/products/1647611

Reducing adapter, connecting thread: M20 x 1.5, color: silver, with O-ring







1646489

https://www.phoenixcontact.com/us/products/1646489

### ENLAR-M-KV-M20/M25 - Extension adapter

1647666

https://www.phoenixcontact.com/us/products/1647666

Extension adapter, connecting thread: M20 x 1.5, color: silver, with O-ring





### HC-M-BS-M20 - Screw plug

1645846

https://www.phoenixcontact.com/us/products/1645846

Screw plug, material for screw connection: Brass, nickel-plated, connecting thread: M20 x 1.5, color: silver



Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com