

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

D-SUB contact carrier, shell size 2, for 26 signal contacts, type of contact socket, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-..



Your advantages

- Compatible with IP67 sleeve housing and panel-mount frame
- Easy assembly

Commercial data

Item number	1655182
Packing unit	10 pc
Minimum order quantity	1 pc
Product key	ABNCAB
Catalog page	Page 212 (C-2-2013)
GTIN	4046356029124
Weight per piece (including packing)	11.86 g
Weight per piece (excluding packing)	5.78 g
Customs tariff number	85366990
Country of origin	DE

Technical data

Product properties

Product type	Female insert
Application	high-position
Type	D-SUB
Number of positions	26
Connection profile	D-SUB
Number of slots	1
Type	Socket
Shielded	yes

Data management status

Article revision	02
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	2

Electrical properties


Rated voltage (III/3)	60 V
Rated surge voltage	1 kV
Rated current	3 A (at 20 °C)
Test voltage	1000 V
Transmission medium	Copper

Connection data

Connection technology

Connection method	Crimp connection
-------------------	------------------

Dimensions

Dimensional drawing	
Width	16 mm
Height	12.93 mm
Length	39.52 mm

Material specifications

Flammability rating according to UL 94	V0
--	----

VS-15-BU-DSUB-HD-CD-B - D-SUB contact support



1655182

<https://www.phoenixcontact.com/pc/products/1655182>

Housing material	Metal
Housing surface material	metal-plated
Contact surface material	Gold
Contact carrier material	Glass-fiber reinforced thermoplastics, UL 94 V0

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-55 °C ... 115 °C

Mounting

Mounting type	Screw mounting
---------------	----------------


VS-15-BU-DSUB-HD-CD-B - D-SUB contact support



1655182

<https://www.phoenixcontact.com/pc/products/1655182>

Drawings

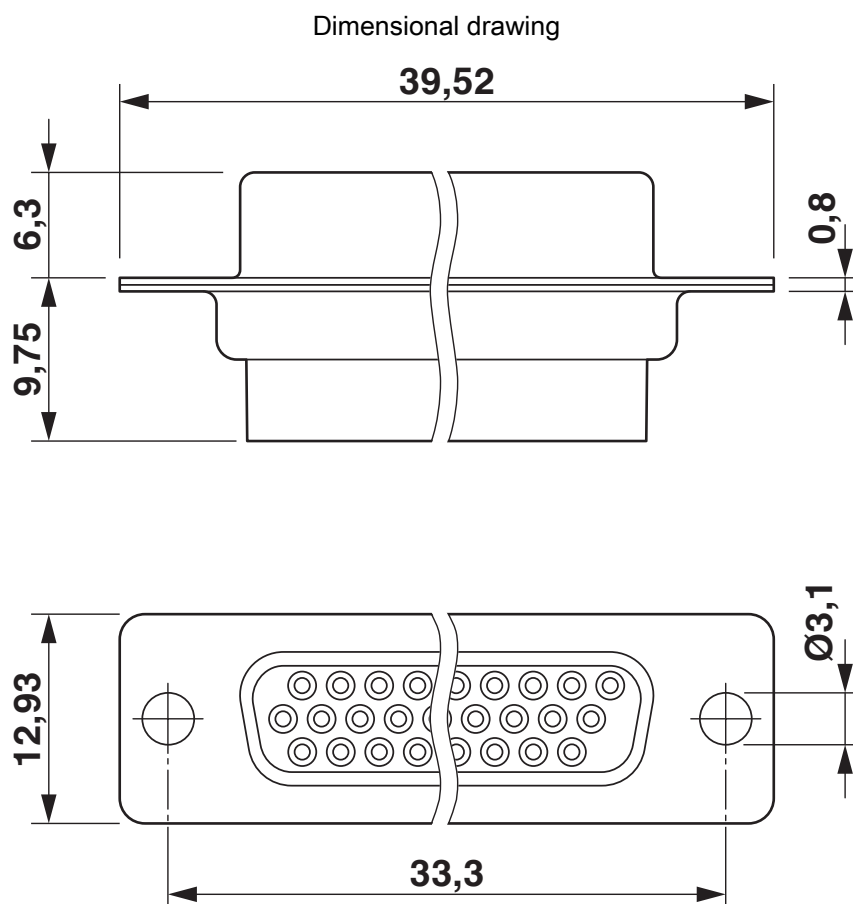

D-SUB contact carrier

VS-15-BU-DSUB-HD-CD-B - D-SUB contact support



1655182

<https://www.phoenixcontact.com/pc/products/1655182>

Classifications

ECLASS

ECLASS-11.0	27440302
ECLASS-13.0	27440214
ECLASS-12.0	27440302

ETIM

ETIM 9.0	EC001132
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VS-15-BU-DSUB-HD-CD-B - D-SUB contact support



1655182

<https://www.phoenixcontact.com/pc/products/1655182>

Accessories

CUC-DSC-J1BAU-S/DSC22 - D-SUB crimp contact

1418790

<https://www.phoenixcontact.com/pc/products/1418790>



D-SUB crimp contact, connection method: Crimp connection, connection cross section: AWG 28- 22, High Density

CUC-DST-GPME-S/DSSC15 - D-SUB sleeve housings

1419710

<https://www.phoenixcontact.com/pc/products/1419710>



D-SUB sleeve housings, degree of protection: IP20, material: ABS, metal-plated, cable outlet: straight, housing size: 2, color: Bare metallic

VS-15-BU-DSUB-HD-CD-B - D-SUB contact support



1655182

<https://www.phoenixcontact.com/pc/products/1655182>

CUC-DST-GPME-A/DSSC15 - D-SUB sleeve housings

1419718

<https://www.phoenixcontact.com/pc/products/1419718>



D-SUB sleeve housings, degree of protection: IP20, material: ABS, metal-plated, cable outlet: angled, housing size: 2, color: Bare metallic

CUC-DST-GZNI-S/DSSC15 - D-SUB sleeve housings

1419724

<https://www.phoenixcontact.com/pc/products/1419724>



D-SUB sleeve housings, degree of protection: IP20, material: Zinc die-cast, cable outlet: straight, housing size: 2, color: Bare metallic

VS-15-BU-DSUB-HD-CD-B - D-SUB contact support



1655182

<https://www.phoenixcontact.com/pc/products/1655182>

CUC-DST-GZNI-A/DSSC15 - D-SUB sleeve housings

1419725

<https://www.phoenixcontact.com/pc/products/1419725>

D-SUB sleeve housings, degree of protection: IP20, material: Zinc die-cast, cable outlet: angled, housing size: 2, color: Bare metallic



VS-15-A - Panel-mount frame

1688036

<https://www.phoenixcontact.com/pc/products/1688036>

D-SUB panel mounting frame, shell size 2, IP67 degree of protection



VS-15-BU-DSUB-HD-CD-B - D-SUB contact support

1655182

<https://www.phoenixcontact.com/pc/products/1655182>



VS-15-T-2PG11 - D-SUB sleeve housings

1688052

<https://www.phoenixcontact.com/pc/products/1688052>

D-SUB sleeve housing, shell size 2, IP67 degree of protection



CUC-SCHRAUBE-5,5:360 - Screw

1421711

<https://www.phoenixcontact.com/pc/products/1421711>

Screw, design: Hexagonal, color: Bare metallic



VS-15-BU-DSUB-HD-CD-B - D-SUB contact support

1655182

<https://www.phoenixcontact.com/pc/products/1655182>



VS-15-ST-DSUB-HD-CD-B - D-SUB contact support

1655195

<https://www.phoenixcontact.com/pc/products/1655195>

D-SUB contact carrier, shell size 2, for 26 signal contacts, type of contact pin, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com