

1657850

<https://www.phoenixcontact.com/pc/products/1657850>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



SC-RJ fiber optic connector, IP67, with push-pull interlocking, plastic housing, duplex, with fast connection technology, for polymer fiber 980/1000 µm, for individual wire diameter 2.2 mm, for cable cross section 6.5 mm ... 9.5 mm

Commercial data

Item number	1657850
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	ABNOBA
Catalog page	Page 372 (C-2-2017)
GTIN	4046356131926
Weight per piece (including packing)	34.9 g
Weight per piece (excluding packing)	32.54 g
Customs tariff number	85366990
Country of origin	DE

Technical data

Notes

General	This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.3 Connectors for inside environment (optical fibre)
---------	--

Product properties

Product type	Fiber optic connector (cable side)
Number of positions	2
Connection profile	SCRJ in acc. with IEC 61754-24


Insulation characteristics

Degree of pollution	2
---------------------	---

Electrical properties

Attenuation	≤ 1.5 dB (Insertion attenuation)
-------------	----------------------------------

Dimensions

Dimensional drawing	
Width	22 mm
Height	30 mm
Length	62.5 mm

Mechanical characteristics

Ferrule diameter	2.50 mm
------------------	---------

Material specifications

Color	black
Material	Plastic
Flammability rating according to UL 94	V0
Ferrule material	Copper alloy
Housing material	PA-GF
Cable seal material	TPE
O-ring material	NBR

Cable/line

External cable diameter	6.5 mm ... 9.5 mm
Wire diameter	2.2 mm

FO cable

VS-PPC-C1-SCRJ-POBK-PG9-A4D-C - FO connectors



1657850

<https://www.phoenixcontact.com/pc/products/1657850>

Number of fibers	2
Fiber	980/1000 µm
Fiber type	POF

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Characteristics

Attenuation	≤ 1.5 dB (Insertion attenuation)
-------------	----------------------------------

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP67
	IP65/IP67
Ambient temperature (operation)	-20 °C ... 70 °C

Standards and regulations

Standards/specifications	IEC PAS 61076-3-117
--------------------------	---------------------


Drawings

Dimensional drawing

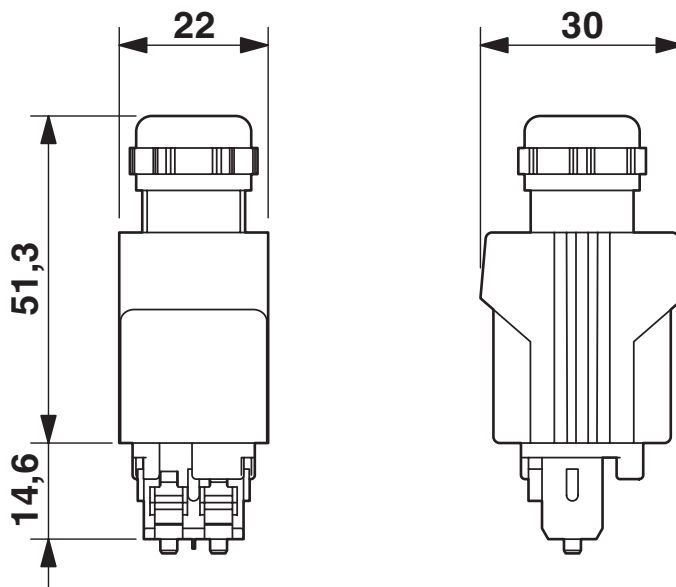

Push-Pull SC-RJ connector IP65/67

Schematic diagram

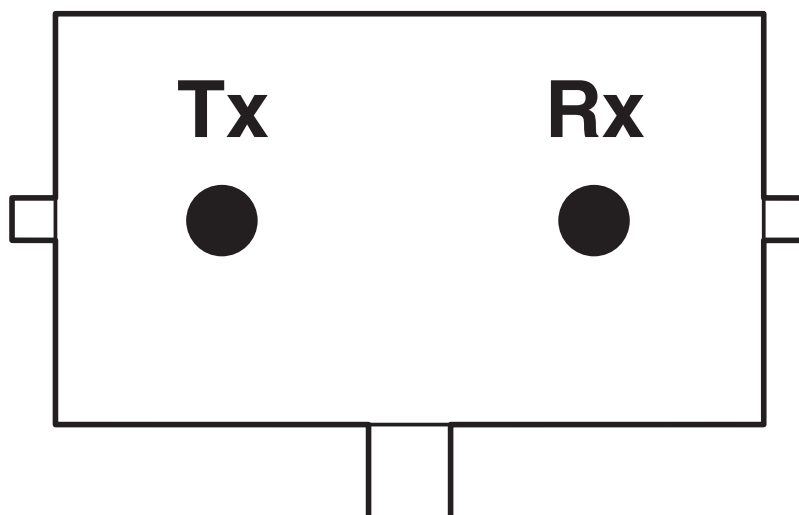



1657850

<https://www.phoenixcontact.com/pc/products/1657850>

Classifications

ECLASS

ECLASS-11.0	19170122
-------------	----------

UNSPSC

UNSPSC 21.0	43223310
-------------	----------

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com