

CK2,5-ED-1,50ST AG - Crimp contact



1663608

<https://www.phoenixcontact.com/sk/products/1663608>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Crimp contact, contact diameter: 2.5 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

Commercial data

Item number	1663608
Packing unit	100 pc
Minimum order quantity	100 pc
Sales key	BF7
Product key	BF7AID
Catalog page	Page 509 (C-2-2019)
GTIN	4017918123413
Weight per piece (including packing)	1.294 g
Weight per piece (excluding packing)	1.294 g
Customs tariff number	74152900
Country of origin	DE

CK2,5-ED-1,50ST AG - Crimp contact

1663608

<https://www.phoenixcontact.com/sk/products/1663608>



Technical data

Notes

General	for HC-M-06..., HC-M-HV-, HC-M-08-, HC-M-20-, HC-A..., HC-B.., HC-BB..., HC-BBB..., and HC-HV contact carriers
---------	--

Mounting

Assembly instructions	The quality of a crimp connection is determined by DIN EN 60352-2.
-----------------------	--

Product properties

Product type	Crimp contact
Series	HC-M-06
	HC-M-HV
	HC-M-08
	HC-A
	HC-BB
	HC-B
	HC-HV
	HC-M-20
	HC-K
	HC-BBB
	HC-Q
	HC-COM
Type	Individual male contact
Contact material type	turned

Connection data

Connection method	Crimp connection
Contact connection type	Pin
Connection technology	Crimp connection
Conductor cross section	1.5 mm² ... 1.5 mm²
Connection cross section AWG	16
Stripping length of the individual wire	7.5 mm (9.5 mm at HC-M-HV...)
Conductor cross section flexible	1.5 mm² ... 1.5 mm²

Material specifications

Contact material	Copper alloy
Contact surface material	silver-plated

Dimensions

Mechanical characteristics	
Contact diameter	2.5 mm

CK2,5-ED-1,50ST AG - Crimp contact



1663608

<https://www.phoenixcontact.com/sk/products/1663608>

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

CK2,5-ED-1,50ST AG - Crimp contact


1663608

<https://www.phoenixcontact.com/sk/products/1663608>



Drawings

Dimensional drawing

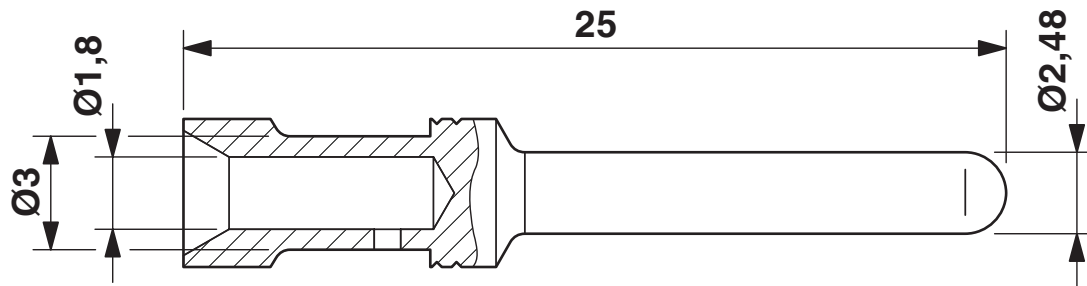

Dimensional drawing

CK2,5-ED-1,50ST AG - Crimp contact



1663608

<https://www.phoenixcontact.com/sk/products/1663608>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sk/products/1663608>



EAC
Approval ID: RU C-DE.AI30.B.01102



EAC
Approval ID: EAC-Zulassung

CK2,5-ED-1,50ST AG - Crimp contact



1663608

<https://www.phoenixcontact.com/sk/products/1663608>

Classifications

ECLASS

ECLASS-11.0	27440204
ECLASS-12.0	27440204
ECLASS-13.0	27440204

ETIM

ETIM 9.0	EC000796
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

CK2,5-ED-1,50ST AG - Crimp contact



1663608

<https://www.phoenixcontact.com/sk/products/1663608>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	ddf71734-28a7-4931-91c2-87c3a6eb15f5

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT s.r.o.
Námestie Mateja Korvína 1
811 07 Bratislava
+421 2 3210 1470
obchod.sk@phoenixcontact.com