

CK2,5-ED-2,50ST AG - Crimp contact



1663611

<https://www.phoenixcontact.com/pc/products/1663611>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Crimp contact, contact diameter: 2.5 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

Commercial data

Item number	1663611
Packing unit	100 pc
Minimum order quantity	1 pc
Product key	BF7AID
Catalog page	Page 509 (C-2-2019)
GTIN	4017918123420
Weight per piece (including packing)	1.365 g
Weight per piece (excluding packing)	1.36 g
Customs tariff number	85366990
Country of origin	DE

CK2,5-ED-2,50ST AG - Crimp contact



1663611

<https://www.phoenixcontact.com/pc/products/1663611>

Technical data

Notes

General	for HC-M-06..., HC-M-HV-, HC-M-08-, HC-M-20-, HC-A..., HC-B.., HC-BB..., HC-BBB..., and HC-HV contact carriers
---------	--

Mounting

Assembly instructions	The quality of a crimp connection is determined by DIN EN 60352-2.
-----------------------	--

Product properties

Product type	Crimp contact
Series	HC-M-06
	HC-M-HV
	HC-M-08
	HC-A
	HC-BB
	HC-B
	HC-HV
	HC-M-20
	HC-K
	HC-BBB
	HC-Q
	HC-COM
Type	Individual male contact
Contact material type	turned

Connection data

Connection method	Crimp connection
Contact connection type	Pin
Connection technology	Crimp connection
Conductor cross section	2.5 mm ² ... 2.5 mm ²
Connection cross section AWG	14
Stripping length of the individual wire	7.5 mm (9.5 mm at HC-M-HV...)
Conductor cross section flexible	2.5 mm ² ... 2.5 mm ²

Material specifications

Contact material	Copper alloy
Contact surface material	silver-plated

Dimensions

Mechanical characteristics

Contact diameter	2.5 mm
------------------	--------

CK2,5-ED-2,50ST AG - Crimp contact



1663611

<https://www.phoenixcontact.com/pc/products/1663611>

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

CK2,5-ED-2,50ST AG - Crimp contact


1663611

<https://www.phoenixcontact.com/pc/products/1663611>



Drawings

Dimensional drawing

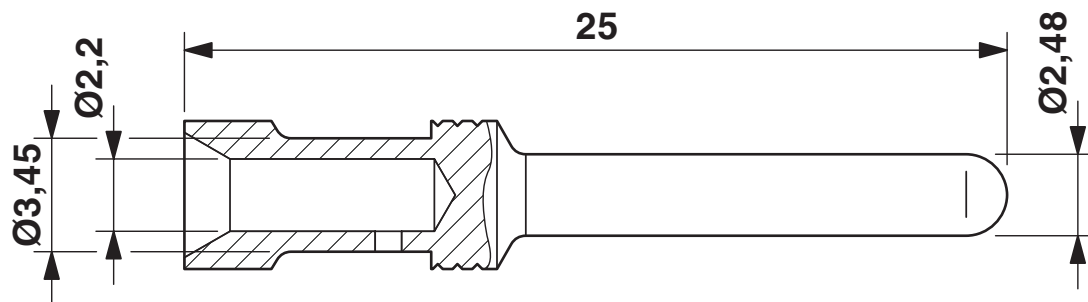

Dimensional drawing

CK2,5-ED-2,50ST AG - Crimp contact



1663611

<https://www.phoenixcontact.com/pc/products/1663611>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1663611>



EAC
Approval ID: RU C-DE.AI30.B.01102



EAC
Approval ID: EAC-Zulassung

CK2,5-ED-2,50ST AG - Crimp contact



1663611

<https://www.phoenixcontact.com/pc/products/1663611>

Classifications

ECLASS

ECLASS-11.0	27440204
ECLASS-12.0	27440204
ECLASS-13.0	27440204

ETIM

ETIM 9.0	EC000796
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

CK2,5-ED-2,50ST AG - Crimp contact



1663611
<https://www.phoenixcontact.com/pc/products/1663611>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com