

TGGM/CDIO/17-BU - Cable connector



1667905

<https://www.phoenixcontact.com/us/products/1667905>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: UC, straight, shielded: yes, Screw locking mechanism, No. of pos.: 17, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245643

Commercial data

Item number	1667905
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAIA
GTIN	4017918163600
Weight per piece (including packing)	152.2 g
Weight per piece (excluding packing)	151.5 g
Customs tariff number	85366990
Country of origin	DE

1667905

<https://www.phoenixcontact.com/us/products/1667905>

Technical data

Product properties

Product type	Circular connector (cable-side)
Number of positions	17

Material specifications

Seal material	NBR
Housing material	CuZn, zinc die-cast

Connection data

Conductor connection	
Connection method	Female

Electrical properties

Contact	
Contact diameter	1 mm
Min. cross section	0.14 mm ²
Max. cross section	0.56 mm ²

Contact	
Contact diameter	1 mm
Min. cross section	0.5 mm ²
Max. cross section	0.75 mm ²

Connector

Insulating body	
Note	Assembly instruction: Integrated contacts: 12 x 1599600 and 5 x 1602998
Coding	N
Insertion/withdrawal cycles	50
Connection method	Crimp connection
Contact switching type	Socket
Application	Signal
Number of positions	17
Direction of rotation	Standard
Connection profile	17
Contact diameter	1 mm
Litz wire cross-section	0.14 mm ²
Litz wire cross-section	0.56 mm ²
Rated current	8 A

Power contacts

Power contacts min.

Power contacts max.

Power contacts

TGGM/CDIO/17-BU - Cable connector



1667905

<https://www.phoenixcontact.com/us/products/1667905>

Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing

Housing material	Metal
Type of locking	Screw locking mechanism
Pg screw connection	Pg16
Degree of protection (plugged in)	IP67
Thread type	M23

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 125 °C (short-term up to 145°C)

TGGM/CDIO/17-BU - Cable connector


1667905

<https://www.phoenixcontact.com/us/products/1667905>



Drawings

Schematic diagram

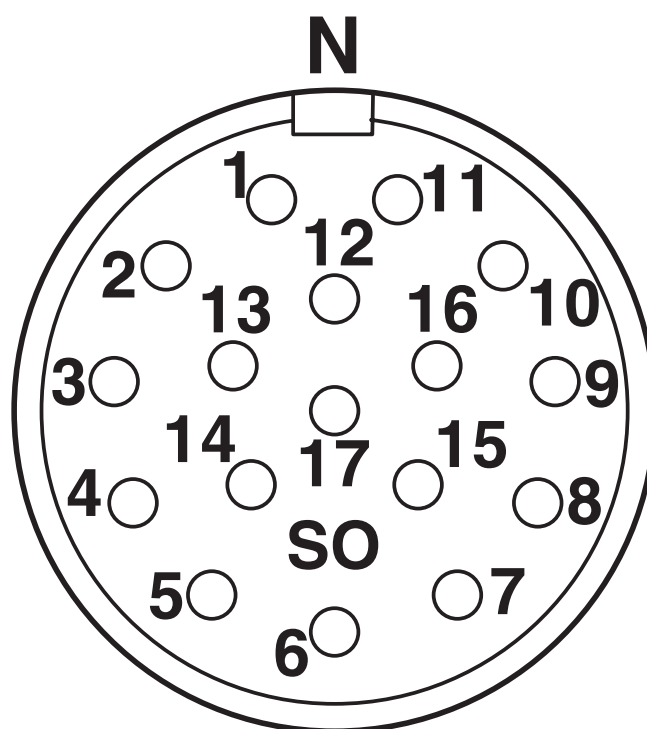

Connector pin assignment

TGGM/CDIO/17-BU - Cable connector



1667905

<https://www.phoenixcontact.com/us/products/1667905>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	ca0abb35-eaea-46ba-b53d-547abca79d59

TGGM/CDIO/17-BU - Cable connector



1667905

<https://www.phoenixcontact.com/us/products/1667905>

Accessories

RC-Z2514 - Crimping pliers with digital display

1614590

<https://www.phoenixcontact.com/us/products/1614590>



Crimping pliers for turned RC crimp contacts Ø 1 mm / Ø 1.5 mm / Ø 2 mm, litz wire cross section of 0.08 mm² ... 2.5 mm²

PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/us/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com