

HC-A 16-EBUC - Contact insert

1677018

<https://www.phoenixcontact.com/us/products/1677018>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

HEAVYCON female insert, A16 series, 16-pos., crimp connection



Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1677018 |
| Packing unit | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF61 |
| Product key | BF7ABB |
| Catalog page | Page 521 (C-2-2019) |
| GTIN | 4017918129637 |
| Weight per piece (including packing) | 45.03 g |
| Weight per piece (excluding packing) | 42.55 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

HC-A 16-EBUC - Contact insert

1677018

<https://www.phoenixcontact.com/us/products/1677018>



Technical data

Notes

| | |
|---------|--|
| General | for HC-D25 / HC-D50 housing, crimp contact CK2,5-ED (crimp contacts not included in scope of supply) |
| General | Connectors may be operated only when there is no load/voltage. |

Mounting

| | |
|-----------------------|---|
| Assembly instructions | To ensure correct use, installation in housing with IP54 protection or better is required |
|-----------------------|---|


Product properties

| | |
|------------------------------------|--|
| Type | D25 |
| | D50 |
| Product type | Contact insert with a fixed no. of positions |
| Number of positions | 16 |
| Connection profile | 16+PE |
| Contact numbering | 1 - 16 |
| Number of connections per position | 1 |
| Contact material type | turned |
| Series | HC-A |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Dimensions
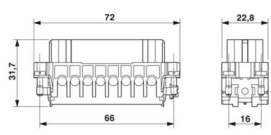
| | |
|---------------------------------|--|
| Dimensional drawing |  |
| Width | 23 mm |
| Height | 31.7 mm |
| Length | 72 mm |
| Drill hole distance, horizontal | 66 mm |
| Drill hole distance, vertical | 16 mm |

Mechanical characteristics

| | |
|------------------|--------|
| Contact diameter | 2.5 mm |
|------------------|--------|

Connection data

Connection technology

| | |
|-----------------------|------------------|
| Connection technology | Crimp connection |
|-----------------------|------------------|

HC-A 16-EBUC - Contact insert



1677018

<https://www.phoenixcontact.com/us/products/1677018>

| | |
|------------------------------------|----------|
| Number of connections per position | 1 |
| Connection in acc. with standard | IEC / EN |

Conductor connection

| | |
|---|---|
| Conductor cross section | 0.5 mm ² ... 4 mm ² (applies to stranded conductors) |
| Connection cross section AWG | 20 ... 12 |
| Tightening torque | 0.7 Nm ... 1 Nm (PE connection) 0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing) |
| Stripping length of the individual wire | 8 mm |

Electrical properties

| | |
|-----------------------|---------|
| Rated voltage (III/3) | 250 V |
| Rated surge voltage | 4 kV |
| Rated current | 16 A |
| Test voltage | 4 kV AC |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 500 |
|-----------------------------|-------|

Material specifications

| | |
|--|-----------------------|
| Flammability rating according to UL 94 | V0 |
| Contact material | Copper alloy |
| Contact surface material | Ag (alternatively Au) |
| Contact carrier material | PA |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|--|
| Ambient temperature (operation) | -40 °C ... 125 °C (including heating up of contacts) |
|---------------------------------|--|

Standards and regulations


| | |
|--|----------------------------|
| Constructional and testing regulations | DIN VDE 0627/86 |
| | DIN VDE 0110/02.79 |
| | DIN VDE 0110-1/04.97 |
| | IEC 60664-1, DIN IEC 60512 |
| | IEC 60352 |
| Tests | DIN VDE 0627/86 |
| | DIN VDE 0110/02.79 |
| | DIN VDE 0110-1/04.97 |
| | IEC 60664-1, DIN IEC 60512 |
| | IEC 60352 |

1677018


<https://www.phoenixcontact.com/us/products/1677018>

Drawings

Schematic diagram

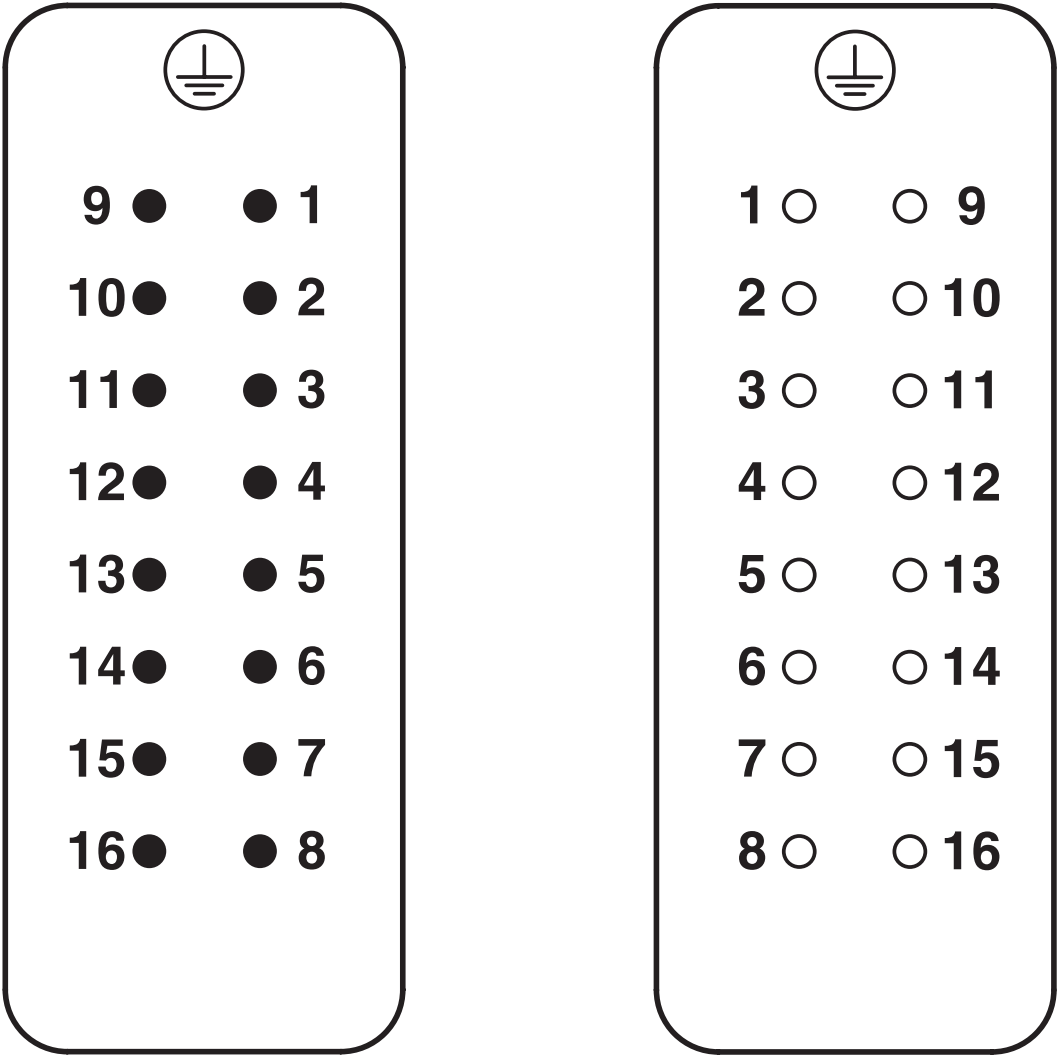


Connector pin assignment, connection side

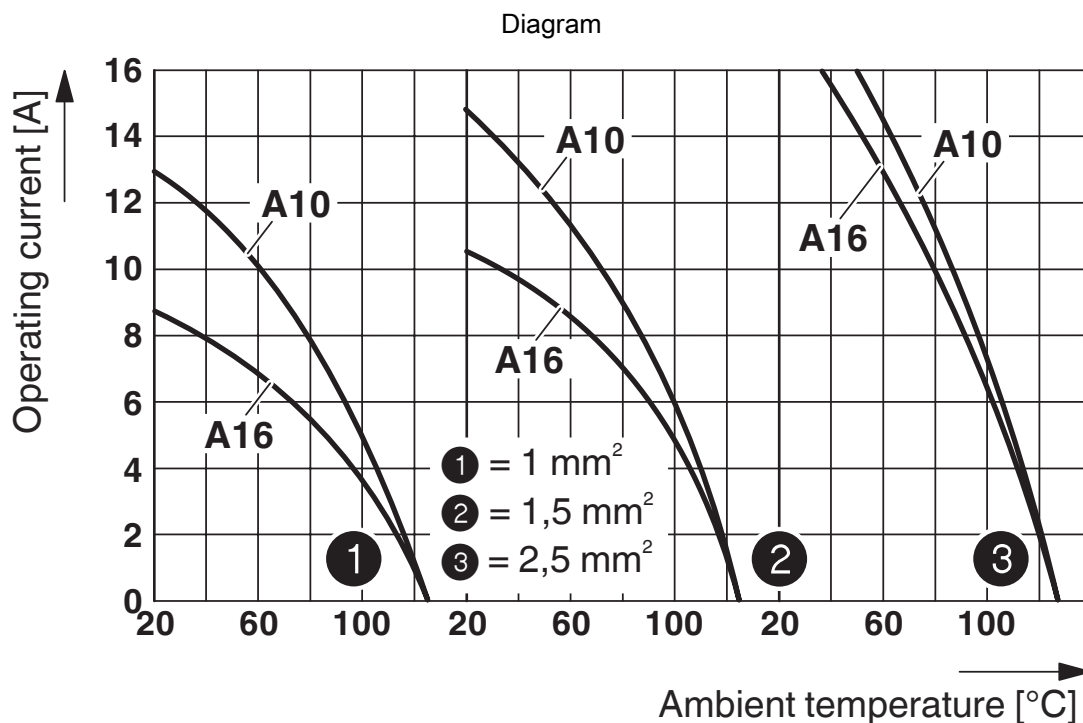

Derating diagram: HC-A...C series

Dimensional drawing

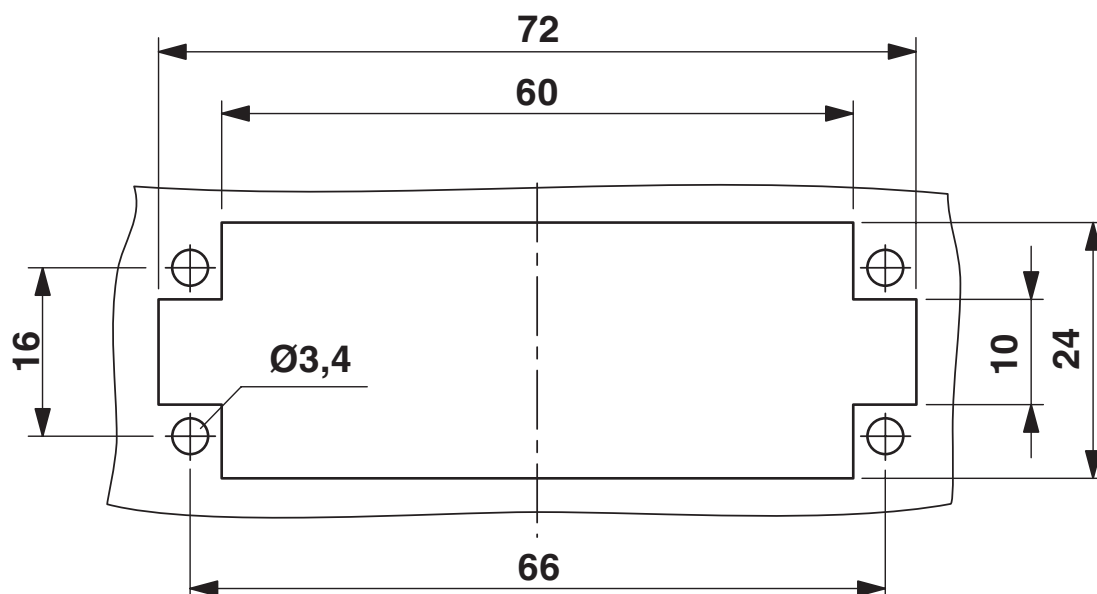

Mounting cutout when used without housing


HC-A 16-EBUC - Contact insert

1677018

<https://www.phoenixcontact.com/us/products/1677018>



Dimensional drawing

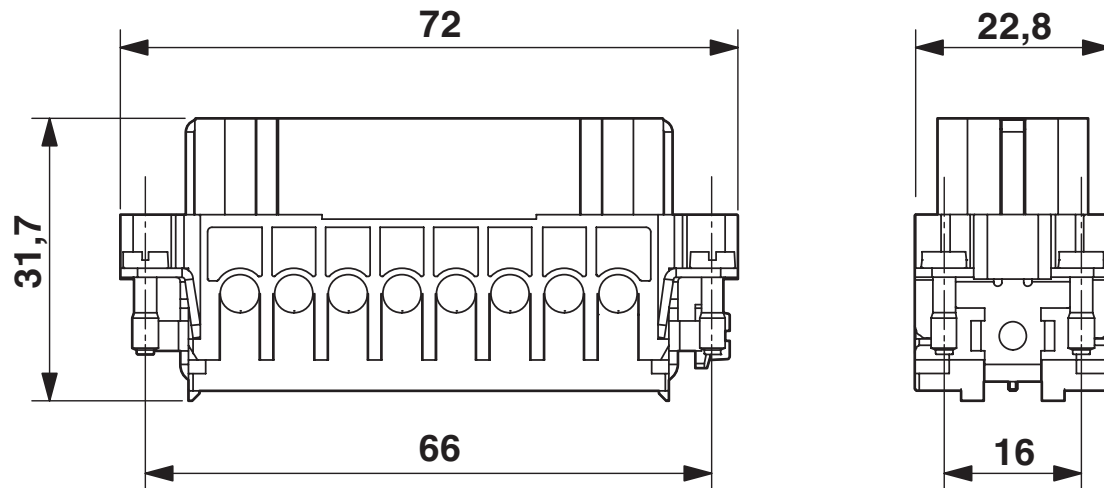

Female insert

HC-A 16-EBUC - Contact insert



1677018

<https://www.phoenixcontact.com/us/products/1677018>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440205 |
| ECLASS-13.0 | 27440205 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC000438 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121500 |
|-------------|----------|

HC-A 16-EBUC - Contact insert



1677018
<https://www.phoenixcontact.com/us/products/1677018>

Environmental product compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com