


HC-A 16-ESTS-32 - Contact insert

1677063

<https://www.phoenixcontact.com/pc/products/1677063>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON male insert, A16 series, 16-pos., screw connection, numbering from 17-32

Commercial data

Item number	1677063
Packing unit	10 pc
Minimum order quantity	1 pc
Product key	BF7ABB
Catalog page	Page 417 (C-4-2013)
GTIN	4017918129682
Weight per piece (including packing)	80.72 g
Weight per piece (excluding packing)	80 g
Customs tariff number	85366990
Country of origin	DE

HC-A 16-ESTS-32 - Contact insert



1677063

<https://www.phoenixcontact.com/pc/products/1677063>

Technical data

Notes

General	for HC-D25 / HC-D 50 housing
---------	------------------------------

Mounting

Assembly instructions	Connectors may be operated only when there is no load/voltage.
-----------------------	--


Product properties

Type	D25
	D50
Product type	Contact insert with a fixed no. of positions
Number of positions	16
Connection profile	16+PE
Contact numbering	17 - 32
Series	HC-A

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	23 mm
Height	36 mm
Length	72.5 mm
Drill hole distance, horizontal	66 mm
Drill hole distance, vertical	16 mm

Connection data

Connection technology

Connection technology	Screw connection
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	0.5 mm ² ... 2.5 mm ² (applies to stranded conductors with ferrules)
Connection cross section AWG	20 ... 14
Tightening torque	0.5 Nm
Stripping length of the individual wire	7 mm

HC-A 16-ESTS-32 - Contact insert



1677063

<https://www.phoenixcontact.com/pc/products/1677063>

Electrical properties

Rated voltage (III/3)	250 V
Rated surge voltage	4 kV
	4 kV
Rated current	16 A
Test voltage	4 kV AC

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PA

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

HC-A 16-ESTS-32 - Contact insert


1677063

<https://www.phoenixcontact.com/pc/products/1677063>




Drawings

Schematic diagram

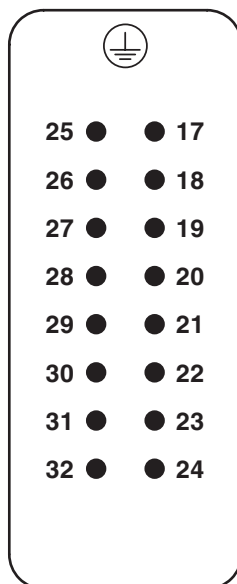

Connector pin assignment, connection side

Dimensional drawing

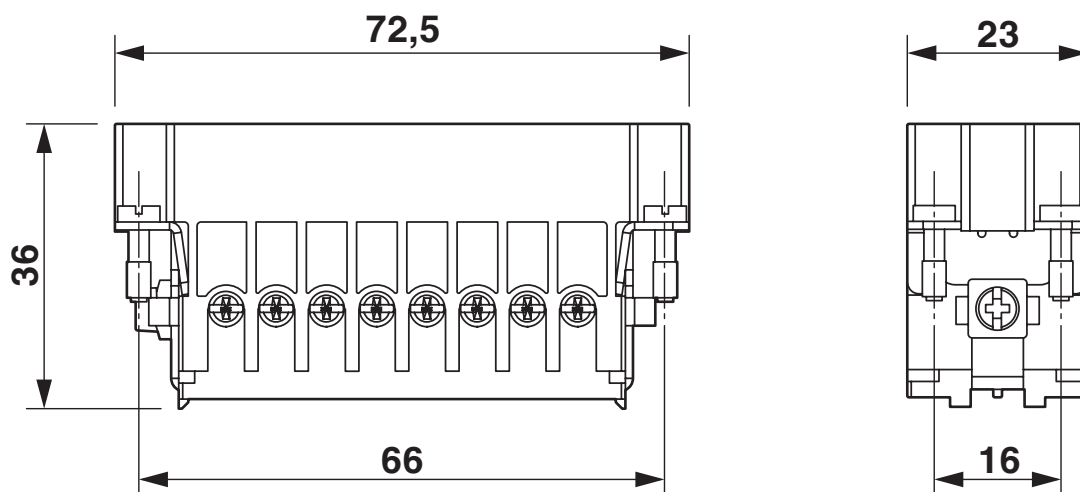

Male insert


HC-A 16-ESTS-32 - Contact insert

1677063

<https://www.phoenixcontact.com/pc/products/1677063>




Dimensional drawing

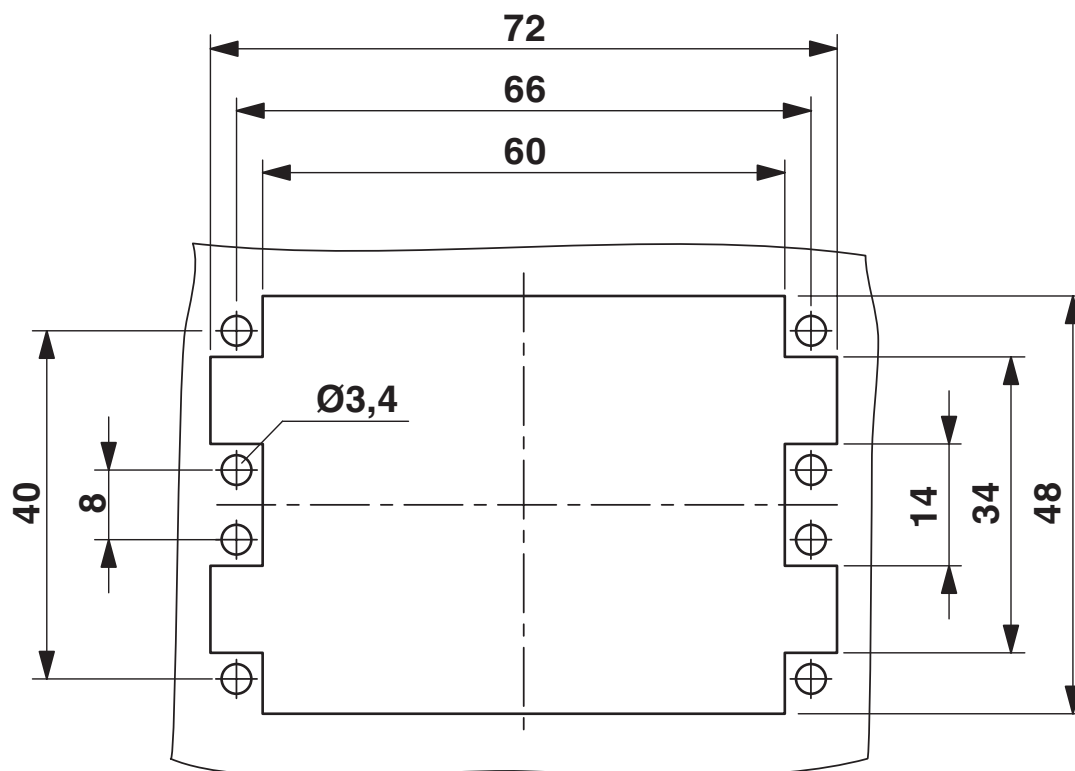

Mounting cutout

Diagram

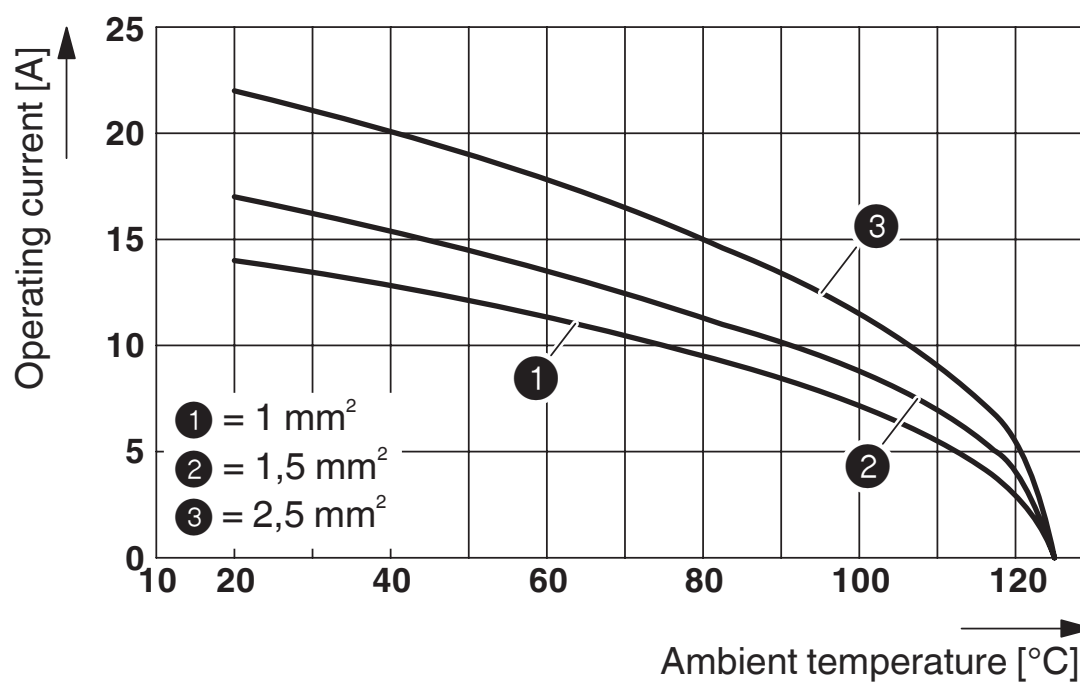

Derating diagram: Series HC-A 16...S

HC-A 16-ESTS-32 - Contact insert



1677063

<https://www.phoenixcontact.com/pc/products/1677063>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-13.0	27440223

HC-A 16-ESTS-32 - Contact insert



1677063

<https://www.phoenixcontact.com/pc/products/1677063>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com