

WR-DA-PG21 - Seal

1686698

<https://www.phoenixcontact.com/pc/products/1686698>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Seal, outside, to increase the protection type, size Pg21



Commercial data

Item number	1686698
Packing unit	5 pc
Minimum order quantity	1 pc
Product key	BF7AZW
Catalog page	Page 51 (C-2-2013)
GTIN	4017918190026
Weight per piece (including packing)	4.76 g
Weight per piece (excluding packing)	4.76 g
Customs tariff number	39269097
Country of origin	DE

WR-DA-PG21 - Seal

1686698

<https://www.phoenixcontact.com/pc/products/1686698>



Technical data

Product properties


Product type	Seal
Pg screw connection	Pg21

Material specifications

Seal material	PUR
---------------	-----

Drawings

Dimensional drawing

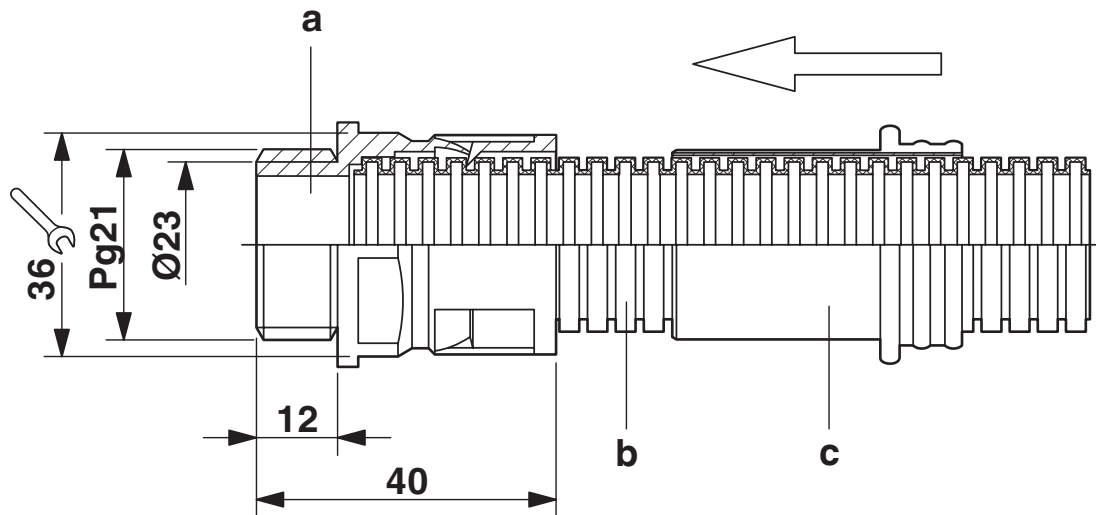

Assembly instructions for Pg21 corrugated pipe

a = Corrugated screw connection


B = Corrugated pipe

c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

Dimensional drawing

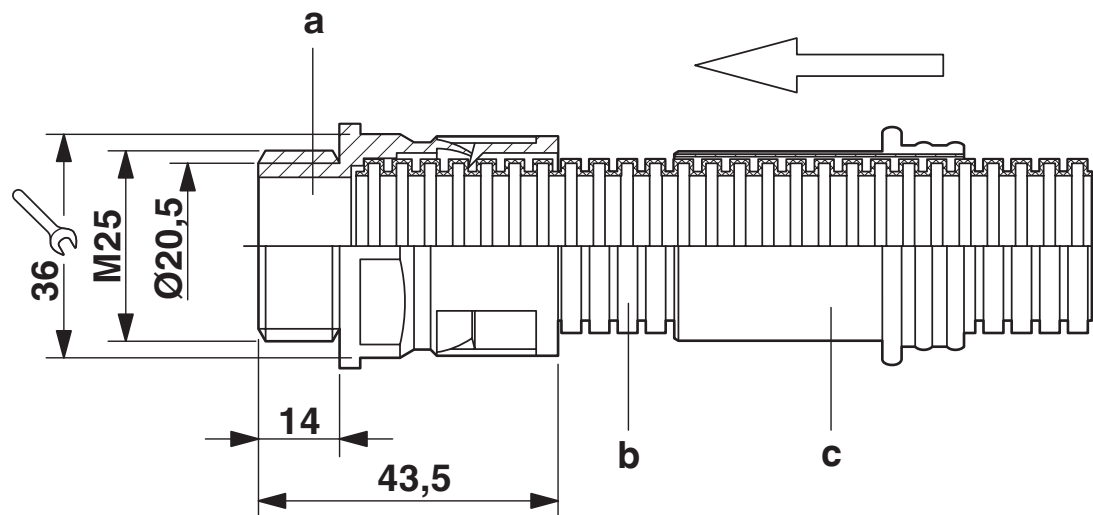

Assembly instructions for M25 corrugated pipe

a = Corrugated screw connection

b = Corrugated pipe

c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

WR-DA-PG21 - Seal



1686698
<https://www.phoenixcontact.com/pc/products/1686698>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com