

SACB-4/ 4-L-M23 - Distributor box



1692404

<https://www.phoenixcontact.com/sk/products/1692404>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor box, application: Standard, connection method: M12 socket Plastic, number of slots: 4, number of positions: 4, coding: A, slot assignment: single, status display: Yes, pnp; master cable connection: M23 plug connection 90°, shielding: no

Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Convenient: increased machine availability thanks to quick and easy diagnostics

Commercial data

Item number	1692404
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF3
Product key	BF3CBB
Catalog page	Page 114 (PC-2009)
GTIN	4017918177867
Weight per piece (including packing)	112.8 g
Weight per piece (excluding packing)	104 g
Customs tariff number	85366990
Country of origin	DE

SACB-4/ 4-L-M23 - Distributor box



1692404

<https://www.phoenixcontact.com/sk/products/1692404>

Technical data

Notes

General	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
General	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".

Product properties

Product type	Distributor box
Application	Standard
Number of positions	4
Number of slots	4
Coding	A
LED	yes

System properties

Local diagnostics	
Monitored function	Supply voltage
Optical representation	Green LED

Electrical properties

Max. operating voltage U_{max}	30 V DC
Local diagnostics	Supply voltage Green LED
	Status display I/O Yellow LED
Nominal voltage U_N	24 V DC
Rated current, total	12 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A

Connection data

Conductor connection	
Sensor/actuator connection system	M12 socket
Tightening torque slot sensor/actuator cable	0.4 Nm

Pin assignment	
Slot/position = Wire color or connection	1 / 4 (A) = 1
	2 / 4 (A) = 2
	3 / 4 (A) = 3
	4 / 4 (A) = 4
	1-4 / 1 (+ 24 V) = 11
	1-4 / 3 (0 V) = 9+10

SACB-4/ 4-L-M23 - Distributor box

1692404

<https://www.phoenixcontact.com/sk/products/1692404>




	1-4 / 5 (PE) = 12
--	-------------------

Signaling

Status display present	Yes
------------------------	-----

Dimensions

Dimensional drawing	
Width	54 mm
Height	26 mm
Length	117 mm

Material specifications

Material Threaded sleeve	PA
Material Housing	PA
Flammability rating according to UL 94	V0
Seal material O-ring	NBR
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	gold-plated

Cable/line

Connection method	M23 plug connection
-------------------	---------------------

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP65
	IP67
Ambient temperature (operation)	-20 °C ... 75 °C


SACB-4/ 4-L-M23 - Distributor box

1692404

<https://www.phoenixcontact.com/sk/products/1692404>

Drawings

Circuit diagram

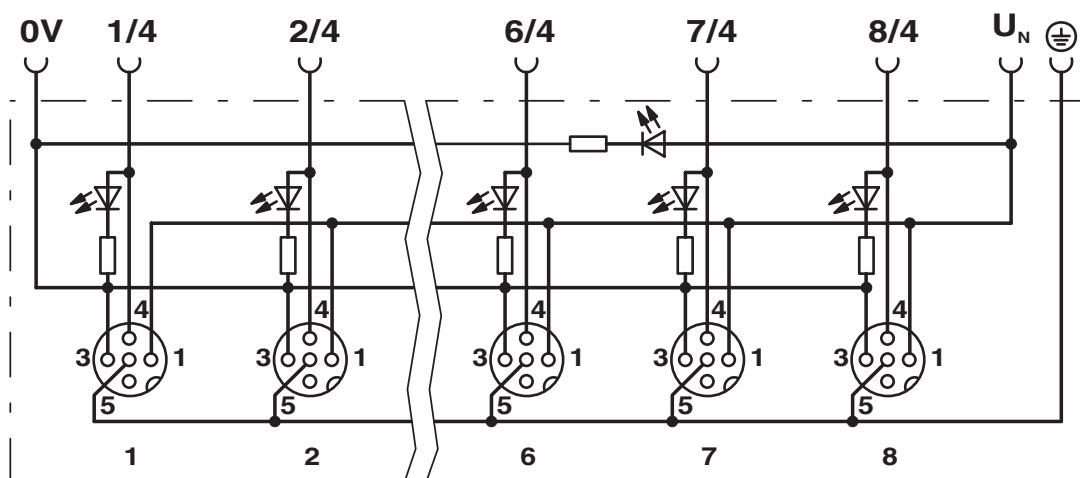


SACB-4/ 4-L-M23 - Distributor box

1692404

<https://www.phoenixcontact.com/sk/products/1692404>




Schematic diagram

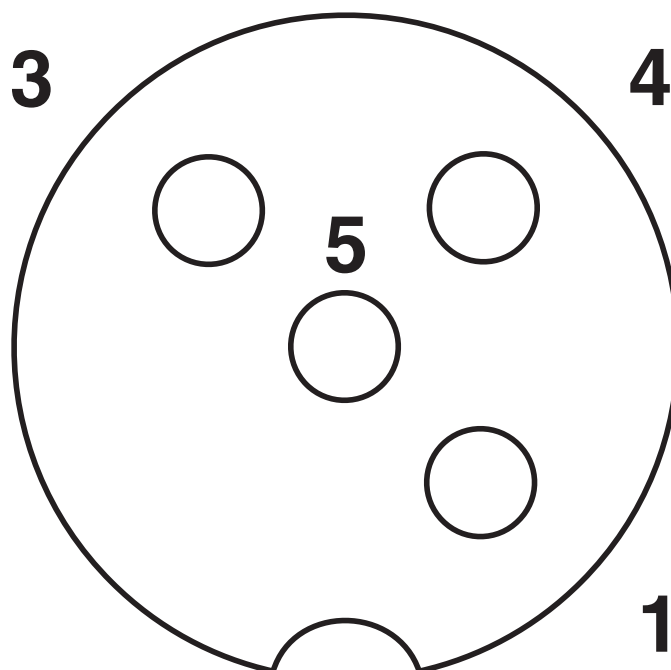

M12 slot, socket, 4-pos.

Schematic diagram

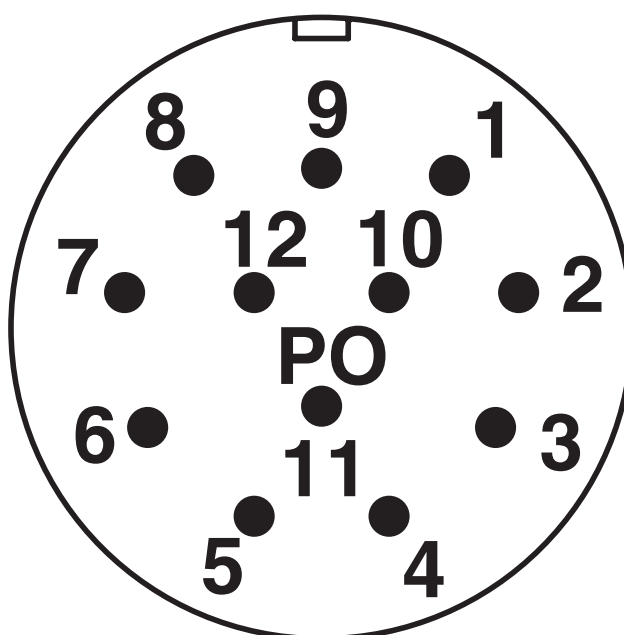

M23 plug connection pin, 12-pos.


SACB-4/ 4-L-M23 - Distributor box

1692404

<https://www.phoenixcontact.com/sk/products/1692404>



Dimensional drawing

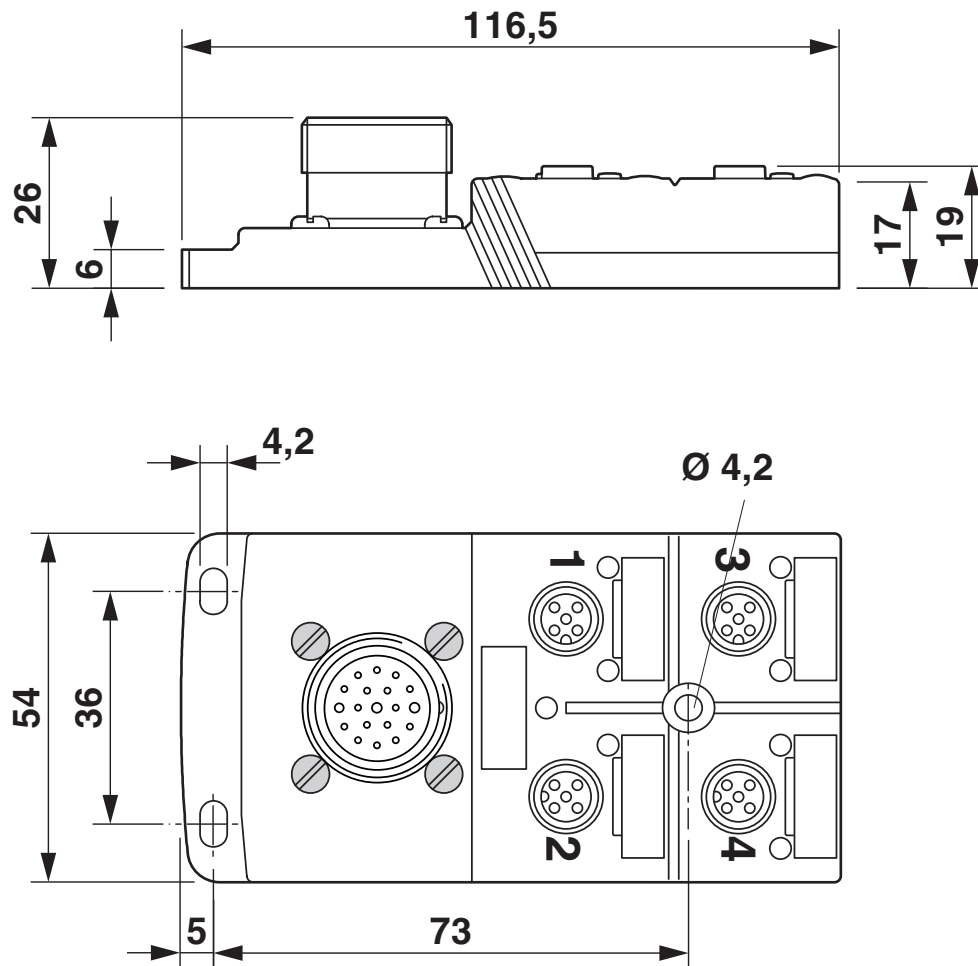

SACB-4/ 4-L-M23 - Distributor box



1692404

<https://www.phoenixcontact.com/sk/products/1692404>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sk/products/1692404>

 cUL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	-	22 - 16	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	-	22 - 16	-

cULus Recognized				
-------------------------	--	--	--	--

SACB-4/ 4-L-M23 - Distributor box



1692404

<https://www.phoenixcontact.com/sk/products/1692404>

Classifications

ECLASS

ECLASS-11.0	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111

ETIM

ETIM 9.0	EC003558
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SACB-4/ 4-L-M23 - Distributor box



1692404

<https://www.phoenixcontact.com/sk/products/1692404>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT s.r.o.
Námestie Mateja Korvína 1
811 07 Bratislava
+421 2 3210 1470
obchod.sk@phoenixcontact.com