

SACC-DSIV-M12FS-5CON-L 90 - Device connector rear mounting

1694240
<https://www.phoenixcontact.com/pc/products/1694240>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, Socket, angled, M12, coding: A, Rear mounting, M12 x 1, Wave soldering

Commercial data

Item number	1694240
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	02
Product key	ABQEHI
Catalog page	Page 60 (PC-2011)
GTIN	4017918177522
Weight per piece (including packing)	14.54 g
Weight per piece (excluding packing)	11.1 g
Customs tariff number	85366990
Country of origin	HU

SACC-DSIV-M12FS-5CON-L 90 - Device connector rear mounting



1694240

<https://www.phoenixcontact.com/pc/products/1694240>

Technical data

Mounting

Mounting type	Rear mounting M12 x 1 With locking nut
Assembly note	With locking nut

Product properties

Product type	Circular connectors (device side)
Number of positions	5
Shielded	no
Coding	A
Thread type	M12

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Brass, nickel-plated

Electrical properties

Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	60 V
Nominal current I_N	4 A

Connection data

Conductor connection

Connection method	Wave soldering
Contact connection type	Socket

Connector

Connection 1

Head design	Socket
Head cable outlet	angled
Head thread type	M12
Coding	A

SACC-DSIV-M12FS-5CON-L 90 - Device connector rear mounting



1694240
<https://www.phoenixcontact.com/pc/products/1694240>

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

Standards and regulations

M12	
Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

SACC-DSIV-M12FS-5CON-L 90 - Device connector rear mounting




1694240

<https://www.phoenixcontact.com/pc/products/1694240>

Drawings

Schematic diagram

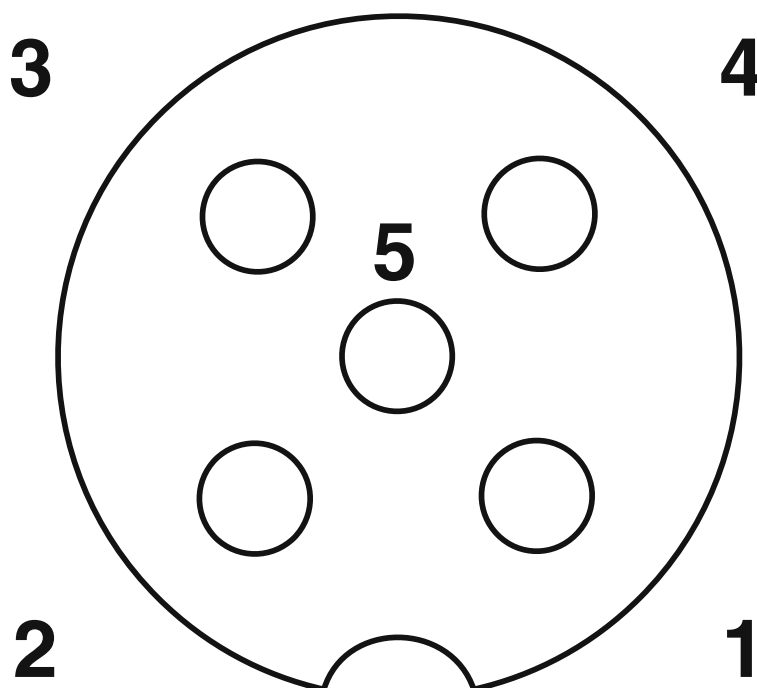

Pin assignment M12 socket, 5-pos., A-coded, socket side view

SACC-DSIV-M12FS-5CON-L 90 - Device connector rear mounting



1694240

<https://www.phoenixcontact.com/pc/products/1694240>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1694240>

	cUL Recognized Approval ID: FILE E 221474			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

	UL Recognized Approval ID: FILE E 221474			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

	UL Recognized Approval ID: E221474-20070307			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

	cUL Recognized Approval ID: E221474-20070307			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	60 V	4 A	-	-

SACC-DSIV-M12FS-5CON-L 90 - Device connector rear mounting



1694240

<https://www.phoenixcontact.com/pc/products/1694240>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-DSIV-M12FS-5CON-L 90 - Device connector rear mounting



1694240

<https://www.phoenixcontact.com/pc/products/1694240>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7a9b8d80-2aae-4f37-a126-df3c052b3fb9

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com