

1694363

https://www.phoenixcontact.com/pc/products/1694363

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 3-position, Socket, straight, M8, Rear mounting, M12 \times 1, Wave soldering

Your advantages

- Easy PCB assembly: one-piece connectors for wave soldering
- Standard pin assignments and codings for signal transmission with a uniform design-in design
- For high transmission reliability: optional shield connection to the housing and latching on the PCB

Commercial data

Item number	1694363	
Packing unit	20 pc	
Minimum order quantity	20 pc	
Sales key	02	
Product key	ABQJBI	
Catalog page	Page 226 (C-2-2013)	
GTIN	4017918178666	
Weight per piece (including packing)	13.34 g	
Weight per piece (excluding packing)	13.34 g	
Customs tariff number	85366990	
Country of origin	DE	



1694363

https://www.phoenixcontact.com/pc/products/1694363

Technical data

Mounting

Mounting type	Rear mounting M12 x 1 With flat nut
Assembly note	With flat nut

Product properties

Product type	Circular connectors (device side)
Number of positions	3
Shielded	no
Coding	A
Thread type	M8

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	НВ
Seal material	NBR
Contact material	CuSn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Brass, nickel-plated

Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	48 V AC
	60 V DC
Nominal current I _N	4 A

Connection data

Conductor connection

Connection method	Wave soldering	
Contact connection type	Socket	
Tightening torque	1 Nm 1.5 Nm (Installation-side)	

Connector

Connection 1

Head design	Socket
-------------	--------



1694363

https://www.phoenixcontact.com/pc/products/1694363

Standards/specifications

	Head cable outlet	straight		
	Head thread type	M8		
Environmental and real-life conditions				
4	Ambient conditions			
	Degree of protection	IP67		
		IP67		
	Ambient temperature (operation)	-40 °C 85 °C		
Standards and regulations				
1	M8			
	Standard designation	M8 connector		

IEC 61076-2-104




1694363

https://www.phoenixcontact.com/pc/products/1694363

Drawings

Schematic diagram

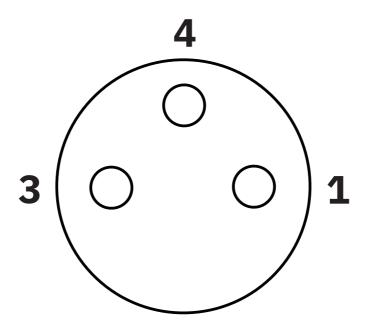

Pin assignment M8 socket, 3-pos., view female side



1694363

https://www.phoenixcontact.com/pc/products/1694363

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1694363

.71	cUL Recognized Approval ID: E221474-20070307			
	Nominal vol	tage U _N Nominal current	t I _N Cross section AW	/G Cross section mm ²
	30 V	4 A	-	-

UL Recognized Approval ID: E221474-20070307					
		Nominal voltage \mathbf{U}_{N}	Nominal current I _N	Cross section AWG	Cross section mm ²
		30 V	4 A	-	-

cULus Recognized



1694363

https://www.phoenixcontact.com/pc/products/1694363

Classifications

ECLASS

	JLAGO				
	ECLASS-11.0	27440102			
	ECLASS-12.0	27440116			
	ECLASS-13.0	27440116			
ΕΊ	ETIM				
	ETIM 9.0	EC002635			
U	UNSPSC				
	UNSPSC 21.0	39121400			



1694363

https://www.phoenixcontact.com/pc/products/1694363

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	981741f3-ec05-4954-8e67-e89d5dd5a4b6

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com