Product datasheet

Specifications





distributed analog input Modicon Momentum - 8 Input

170AAI03000

Main

Range of product	Modicon Momentum automation platform					
product or component type	Analogue input base					
Analogue input number	8					
Analogue input type	Differential					
Analogue input range	+/- 20 mA 14 bits + sign 250 kOhm 420 mA 15 bits + sign 250 kOhm +/- 10 V 14 bits + sign > 0.1 kOhm +/- 5 V 14 bits + sign > 0.1 kOhm 15 V 15 bits + sign > 0.1 kOhm					

Complementary

Data format	Full 16 bits signed					
Absolute accuracy error	+/- 0.13 % full scale 25 °C 15 V					
	+/- 0.19 % full scale 60 °C 15 V					
	+/- 0.21 % full scale 25 °C +/- 5 V					
	+/- 0.26 % full scale 60 °C +/- 5 V					
	+/- 0.27 % full scale 25 °C +/- 10 V					
	+/- 0.27 % full scale 25 °C 420 mA					
	+/- 0.32 % full scale 25 °C +/- 20 mA					
	+/- 0.32 % full scale 60 °C +/- 10 V					
	+/- 0.38 % full scale 60 °C 420 mA					
	+/- 0.41 % full scale 60 °C +/- 20 mA					
Conversion time	12 ms 8					
Isolation between channels	+/- 200 V DC for 1 minute					
Isolation between channels and ground	500 V AC for 1 minute					
Isolation between channels and bus	500 V AC for 1 minute					
Permissible common mode	100 V 4763 Hz DC between channels to ground					
voltage	250 V 4763 Hz AC between channels to ground					
Common mode rejection	> 80 dB between channels to ground					
External power requirement	< 382 mA DC					
	20.428.8 V DC					
	24 V DC					
Reverse polarity protection	Internal					
marking	CE					
Local signalling	1 LED (green) for ready					
	8 LEDs for channel status					
Electrical connection	2 connectors for removable terminal blocks					
Depth	47.5 mm					
Height	125 mm					

Width	141.5 mm
net weight	0.215 kg

Environment

Standards	EN 50081-2 IEC 1131				
Product certifications	FM Class 1 Division 2				
	CSA				
	UL				
protective treatment	TC				
Resistance to electrostatic	4 kV contact conforming to IEC 801-2				
discharge	8 kV on air conforming to IEC 801-2				
Resistance to electromagnetic fields	10 V/m 801000 MHz conforming to IEC 801-3				
Ambient air temperature for operation	060 °C				
Ambient air temperature for storage	-4085 °C				
Relative humidity	95 % without condensation				
Operating altitude	<= 5000 m				

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.5 cm
Package 1 Width	18.0 cm
Package 1 Length	26.0 cm
Package 1 Weight	398.0 g

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free

Rohs Exemption Information


Certifications & Standards

Reach Regulation	REACh Declaration					
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)					
China Rohs Regulation	China RoHS declaration					
Environmental Disclosure	Product Environmental Profile					
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins					
Circularity Profile	End of Life Information					

Dimensions Drawings

Standard Adapter on a Typical Base


Dimensions

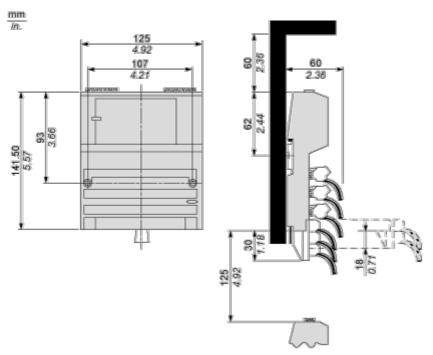

Product datasheet


Mounting and Clearance

Mounting on a Wall



Connections and Schema

External Wiring Diagram

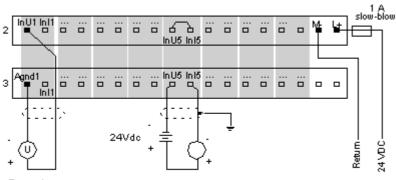

Examples

* Channel1, wired for voltage input

* Channel 5, wired for current input

Internal Pin Connections

2							, , ,		å Ma	남
	InU1	InU2	In U3	InU4	In U5	In U6	In U7	In U8		
3	Agnd1	Agnd2	Agnd3	Agnd4	Agnd5	Agnd6	Agnd7	Agnd8		
	In	lt Inl	2 In	13 In I	4 Inl	5 Ini	16 In	l7 Inl	8	