



Header - STB 3/4-G-5,08 - 1751044

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, number of positions: 4, pitch: 5.08 mm, color: green, contact surface: Tin, mounting: Wave soldering

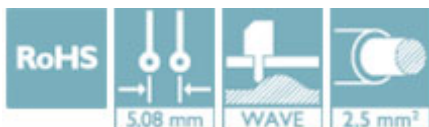

Key Commercial Data

Packing unit	50 STK
GTIN	 4 017918 028312
GTIN	4017918028312

Technical data

Dimensions

Length [l]	14.8 mm
Pitch	5.08 mm
Dimension a	15.24 mm
Width [w]	25.36 mm
Constructional height	16 mm
Height [h]	21.1 mm
Length of the solder pin	5.1 mm
Pin dimensions	1 x 0,8 mm
Pin spacing	5.08 mm
Hole diameter	1.3 mm

General

Range of articles	STB
Color	green
Stripping length	8 mm
Number of positions	4

Standards and Regulations

Connection in acc. with standard	CSA
----------------------------------	-----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Header - STB 3/4-G-5,08 - 1751044

Approvals


Approvals


Approvals


CSA / UL Recognized / EAC

Ex Approvals

Approval details

CSA		http://www.csagroup.org/services-industries/product-listing/	13631
Nominal current IN		10 A	
Nominal voltage UN		300 V	

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
Nominal current IN		10 A	
Nominal voltage UN		300 V	

EAC			B.01742
-----	---	--	---------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>