


HC-B 24-EBUS 48 - Contact insert

1772094

<https://www.phoenixcontact.com/pc/products/1772094>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



HEAVYCON female insert, B24 series, 24-pos., screw connection, numbering 25 ... 48

Commercial data

Item number	1772094
Packing unit	10 pc
Minimum order quantity	1 pc
Product key	BF7ABC
Catalog page	Page 345 (PC-2007)
GTIN	4017918036768
Weight per piece (including packing)	150.84 g
Weight per piece (excluding packing)	150.84 g
Customs tariff number	85366990
Country of origin	DE

HC-B 24-EBUS 48 - Contact insert



1772094

<https://www.phoenixcontact.com/pc/products/1772094>

Technical data

Notes

General	For HEAVYCON-ADVANCE housing of B24 type and HEAVYCON housing of B24/B48 type
---------	---

Mounting

Assembly note	For housings of type B16/B32. Connectors may only be actuated when there is no load/voltage.
---------------	--


Product properties

Product type	Contact insert with a fixed no. of positions
Type	B24
Number of positions	24
Connection profile	24+PE
Contact numbering	25 - 48

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	34 mm
Height	37.5 mm
Length	111 mm

Connection data

Connection technology

Connection technology	Screw connection
-----------------------	------------------

Conductor connection

Conductor cross section	0.5 mm ² ... 2.5 mm ² (applies to stranded conductors with ferrules) 0.5 mm ² ... 4 mm ² (PE screw)
Connection cross section AWG	20 ... 14 20 ... 12 (PE screw)
Tightening torque	0.5 Nm
Stripping length of the individual wire	7 mm

Electrical properties

HC-B 24-EBUS 48 - Contact insert



1772094

<https://www.phoenixcontact.com/pc/products/1772094>

Rated voltage (III/3)	500 V
Rated surge voltage	6 kV
Rated current	16 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PA

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

HC-B 24-EBUS 48 - Contact insert


1772094

<https://www.phoenixcontact.com/pc/products/1772094>




Drawings

Dimensional drawing

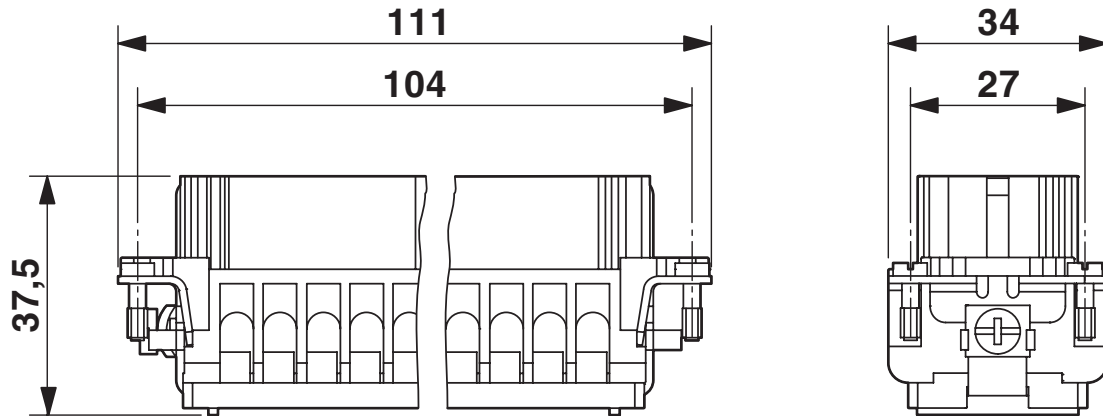

Female insert


Dimensional drawing

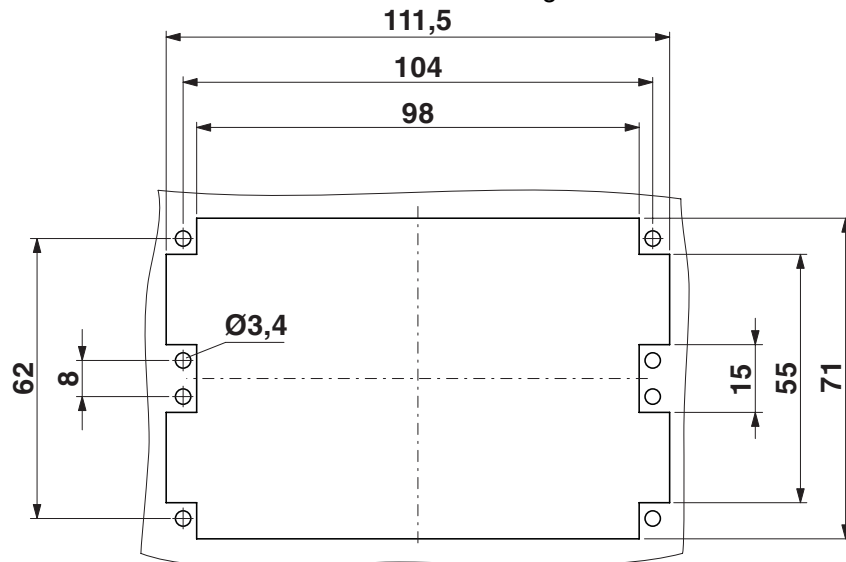

Mounting cutout


1772094

<https://www.phoenixcontact.com/pc/products/1772094>

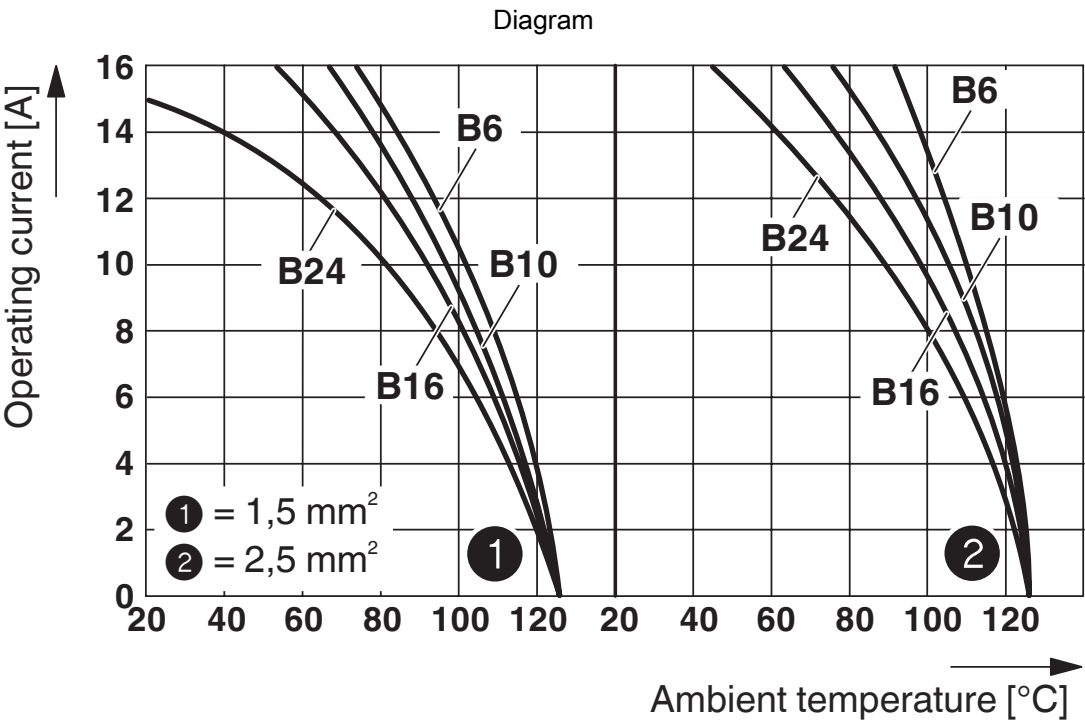

Derating diagram: Series HC-B...S / HC-B...C

Schematic diagram

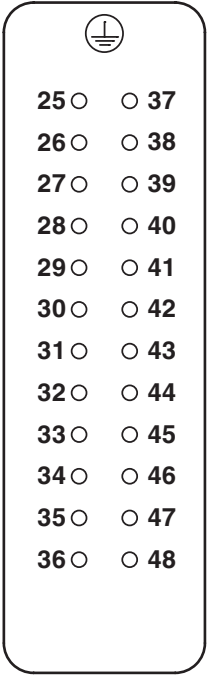

Connector pin assignment, connection side

HC-B 24-EBUS 48 - Contact insert



1772094

<https://www.phoenixcontact.com/pc/products/1772094>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-13.0	27440205

HC-B 24-EBUS 48 - Contact insert



1772094

<https://www.phoenixcontact.com/pc/products/1772094>

Environmental product compliance

China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com