

1777561  
<https://www.phoenixcontact.com/us/products/1777561>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PCB terminal block, nominal current: 41 A, rated voltage (III/2): 1000 V, nominal cross section: 4 mm<sup>2</sup>, number of potentials: 4, number of rows: 1, number of positions per row: 4, product range: MKDS 5 N HV, pitch: 6.35 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: green, Pin layout: Zigzag pinning W, Solder pin [P]: 5 mm, number of solder pins per potential: 1, type of packaging: packed in cardboard

Your advantages

- Well-known connection principle allows worldwide use
- Low temperature rise, thanks to maximum contact force
- Allows connection of two conductors
- Unrestricted 600-V-UL approval thanks to compact zig-zag pinning

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1777561             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales key                            | AA14                |
| Product key                          | AANFDF              |
| Catalog page                         | Page 445 (C-1-2013) |
| GTIN                                 | 4046356522342       |
| Weight per piece (including packing) | 13.548 g            |
| Weight per piece (excluding packing) | 13.322 g            |
| Customs tariff number                | 85369010            |
| Country of origin                    | PL                  |

# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

## Technical data

### Product properties

|                           |                                |
|---------------------------|--------------------------------|
| Product type              | Printed circuit board terminal |
| Product family            | MKDS 5 N HV                    |
| Product line              | COMBICON Terminals L           |
| Type                      | PC termination block           |
| Number of positions       | 4                              |
| Pitch                     | 6.35 mm                        |
| Number of connections     | 4                              |
| Number of rows            | 1                              |
| Number of potentials      | 4                              |
| Pin layout                | Zigzag pinning W               |
| Solder pins per potential | 1                              |

### Electrical properties

|                             |        |
|-----------------------------|--------|
| Nominal current $I_N$       | 41 A   |
| Nominal voltage $U_N$       | 1000 V |
| Degree of pollution         | 3      |
| Rated voltage (III/3)       | 800 V  |
| Rated surge voltage (III/3) | 8 kV   |
| Rated voltage (III/2)       | 1000 V |
| Rated surge voltage (III/2) | 8 kV   |
| Rated voltage (II/2)        | 1000 V |
| Rated surge voltage (II/2)  | 8 kV   |

### Connection data

#### Connection technology

|                       |                      |
|-----------------------|----------------------|
| Type                  | PC termination block |
| Nominal cross section | 4 mm <sup>2</sup>    |

#### Conductor connection

|                                                                                     |                                               |
|-------------------------------------------------------------------------------------|-----------------------------------------------|
| Connection method                                                                   | Screw connection with tension sleeve          |
| Conductor cross section rigid                                                       | 0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>     |
| Conductor cross section flexible                                                    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>     |
| Conductor cross section AWG                                                         | 24 ... 10                                     |
| Conductor cross section flexible, with ferrule without plastic sleeve               | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>    |
| Conductor cross section, flexible, with ferrule, with plastic sleeve                | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>    |
| 2 conductors with same cross section, solid                                         | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>   |
| 2 conductors with same cross section, flexible                                      | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>   |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> |
| 2 conductors with the same cross section, flexible, with TWIN                       | 0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>   |

# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

|                             |                   |
|-----------------------------|-------------------|
| ferrule with plastic sleeve |                   |
| Stripping length            | 8 mm              |
| Tightening torque           | 0.5 Nm ... 0.6 Nm |

## Mounting

|                       |                  |
|-----------------------|------------------|
| Mounting type         | Wave soldering   |
| Pin layout            | Zigzag pinning W |
| Drive form screw head | Slotted (L)      |

## Material specifications


### Material data - contact

|                                          |                                                                                  |
|------------------------------------------|----------------------------------------------------------------------------------|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                         | Cu alloy                                                                         |
| Surface characteristics                  | hot-dip tin-plated                                                               |
| Metal surface terminal point (top layer) | Tin (5 - 7 µm Sn)                                                                |
| Metal surface soldering area (top layer) | Tin (5 - 7 µm Sn)                                                                |

### Material data - housing

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Color (Housing)                                                   | green (6021) |
| Insulating material                                               | PA           |
| Insulating material group                                         | I            |
| CTI according to IEC 60112                                        | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |

## Dimensions

|                       |                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing   |  |
| Pitch                 | 6.35 mm                                                                              |
| Width [w]             | 25.4 mm                                                                              |
| Height [h]            | 32 mm                                                                                |
| Length [l]            | 15.85 mm                                                                             |
| Installed height      | 27 mm                                                                                |
| Solder pin length [P] | 5 mm                                                                                 |
| Pin dimensions        | 0.9 x 0.9 mm                                                                         |

### PCB design

# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

|               |        |
|---------------|--------|
| Pin spacing   | 9 mm   |
| Hole diameter | 1.3 mm |

## Mechanical tests

### Test for conductor damage and slackening

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60998-2-1:2002-12 |
| Result        | Test passed           |

### Pull-out test

|                                                                             |                                         |
|-----------------------------------------------------------------------------|-----------------------------------------|
| Specification                                                               | IEC 60998-2-1:2002-12                   |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.2 mm <sup>2</sup> / solid / > 10 N    |
|                                                                             | 0.2 mm <sup>2</sup> / flexible / > 10 N |
|                                                                             | 6 mm <sup>2</sup> / solid / > 80 N      |
|                                                                             | 4 mm <sup>2</sup> / flexible / > 60 N   |

### Torque test

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60998-2-1:2002-12 |
|---------------|-----------------------|

## Electrical tests

### Temperature-rise test

|                                   |                                |
|-----------------------------------|--------------------------------|
| Specification                     | IEC 60998-1:2002-12            |
| Requirement temperature-rise test | Increase in temperature ≤ 45 K |

### Insulation resistance

|                                              |                     |
|----------------------------------------------|---------------------|
| Specification                                | IEC 60998-1:2002-12 |
| Insulation resistance, neighboring positions | 10 <sup>12</sup> Ω  |

### Air clearances and creepage distances |

|                                                        |                       |
|--------------------------------------------------------|-----------------------|
| Specification                                          | IEC 60947-7-4:2013-08 |
| Insulating material group                              | I                     |
| Comparative tracking index (IEC 60112)                 | CTI 600               |
| Rated insulation voltage (III/3)                       | 800 V                 |
| Rated surge voltage (III/3)                            | 8 kV                  |
| minimum clearance value - non-homogenous field (III/3) | 8 mm                  |
| minimum creepage distance (III/3)                      | 10 mm                 |
| Rated insulation voltage (III/2)                       | 1000 V                |
| Rated surge voltage (III/2)                            | 8 kV                  |
| minimum clearance value - non-homogenous field (III/2) | 8 mm                  |
| minimum creepage distance (III/2)                      | 8 mm                  |
| Rated insulation voltage (II/2)                        | 1000 V                |
| Rated surge voltage (II/2)                             | 8 kV                  |
| minimum clearance value - non-homogenous field (II/2)  | 5.5 mm                |
| minimum creepage distance (II/2)                       | 5.5 mm                |

## Environmental and real-life conditions

# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

## Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:1995-03       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.35 mm (10 Hz ... 60.1 Hz) |
| Acceleration           | 5g (60.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |

## Glow-wire test

|                  |                     |
|------------------|---------------------|
| Specification    | IEC 60998-1:2002-12 |
| Temperature      | 850 °C              |
| Time of exposure | 5 s                 |

## Ambient conditions

|                                         |                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 100 °C (Depending on the current carrying capacity/derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                                              |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                                                 |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                                              |

## Packaging specifications

|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|


# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block

1777561


<https://www.phoenixcontact.com/us/products/1777561>

## Drawings

Drilling plan/solder pad geometry

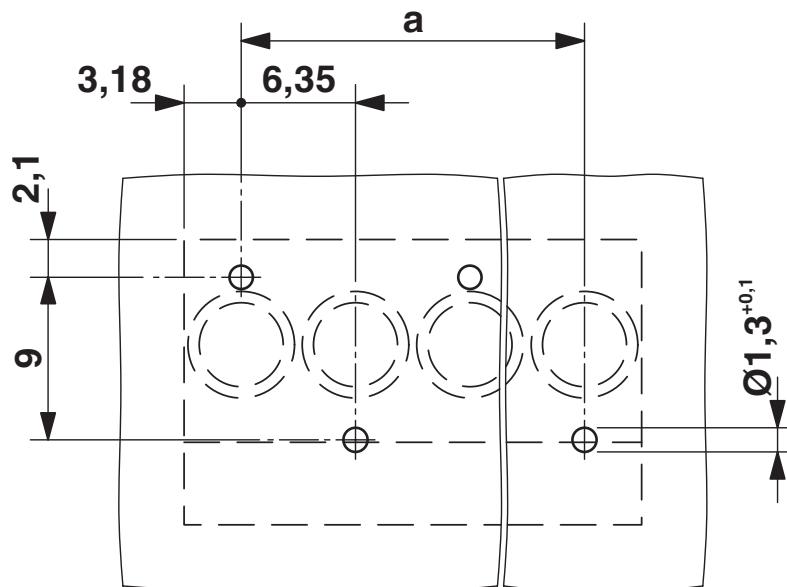

Dimensional drawing

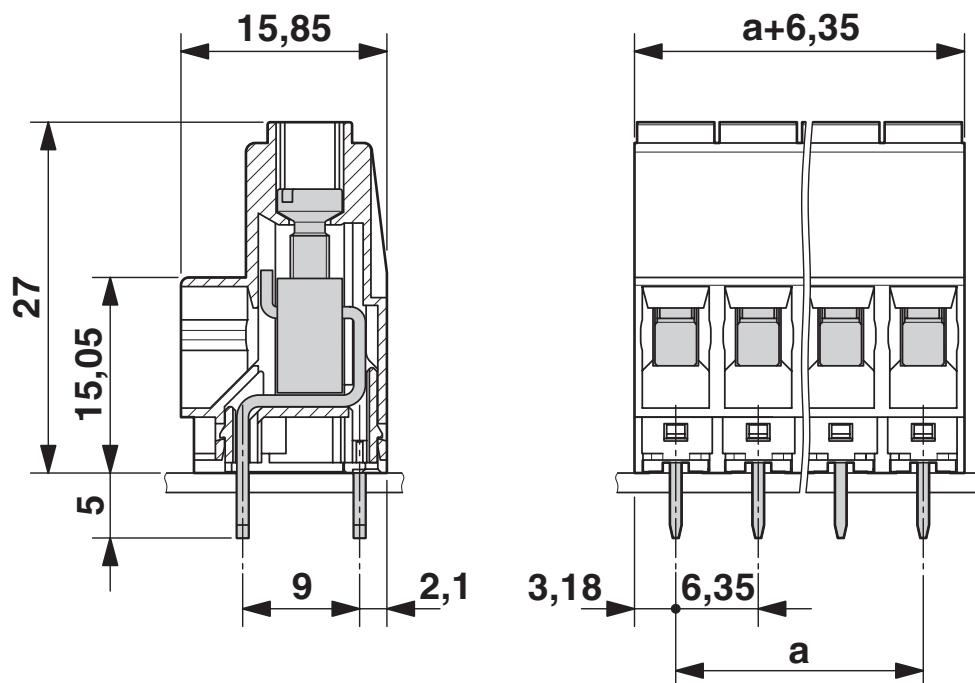


# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

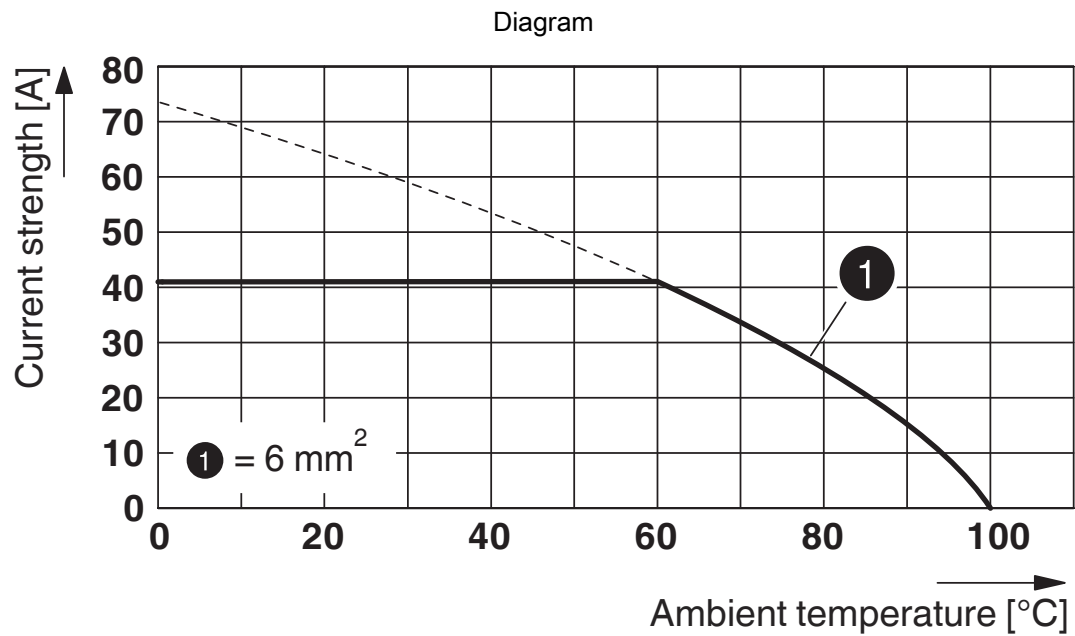

Type: MKDS 5N HV/...-ZB-6,35

Tested in accordance with DIN EN 60512-5-2:2003-01

Reduction factor = 1

Number of positions: 5

# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1777561>

|                                                                                                                                                       |                       |                       |                   |                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| <div> <b>cULus Recognized</b><br/>Approval ID: E60425-19770427</div> |                       |                       |                   |                             |
|                                                                                                                                                       | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                                           |                       |                       |                   |                             |
|                                                                                                                                                       | 600 V                 | 30 A                  | 30 - 10           | -                           |
| Use group C                                                                                                                                           |                       |                       |                   |                             |
|                                                                                                                                                       | 600 V                 | 30 A                  | 30 - 10           | -                           |

|                                                                                                                                                      |                       |                       |                   |                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| <div> <b>VDE Zeichengenehmigung</b><br/>Approval ID: 40055394</div> |                       |                       |                   |                             |
|                                                                                                                                                      | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                                      | 1000 V                | 32 A                  | -                 | 0.2 - 4                     |

# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27460101 |
| ECLASS-12.0 | 27460101 |
| ECLASS-13.0 | 27460101 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002643 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

1777561  
<https://www.phoenixcontact.com/us/products/1777561>

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

## Accessories

### SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>




Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

### SK 6,2/3,8:FORTL.ZAHLEN - Marker card

0804374

<https://www.phoenixcontact.com/us/products/0804374>



Marker card, white, labeled, horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... (99)100, mounting type: adhesive, for terminal block width: 6.2 mm, lettering field size: 6.2 x 3.8 mm

## MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block




1777561

<https://www.phoenixcontact.com/us/products/1777561>

### SK 3,8 REEL P6,2 WH CUS - Marker card

0825126

<https://www.phoenixcontact.com/us/products/0825126>



Marker card, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, for terminal block width: 6.2 mm, lettering field size: continuous x 3.8 mm

---

### SK 5,0 WH:REEL - Marker strip

0805221

<https://www.phoenixcontact.com/us/products/0805221>



Marker strip, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: continuous x 5 mm, Number of individual labels: 10

# MKDS 5N HV/ 4-ZB-6,35 - PCB terminal block



1777561

<https://www.phoenixcontact.com/us/products/1777561>

## SZS 0,8X4,0 VDE - Screwdriver

1212508

<https://www.phoenixcontact.com/us/products/1212508>



Screwdriver, slot-headed, VDE insulated, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)