

# UMSTBVK 2,5/ 5-G-5,08 - DIN rail connector



1788143

<https://www.phoenixcontact.com/pc/products/1788143>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail connector, nominal cross section: 2.5 mm<sup>2</sup>, color: green, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Tin, contact connection type: Pin, number of potentials: 5, number of rows: 1, number of positions: 5, number of connections: 5, product range: UMSTBVK 2,5/...-G, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, mounting: DIN rail, conductor/PCB connection direction: 0 °, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2,5, locking: without, mounting: without, type of packaging: packed in cardboard

## Your advantages

- Direct plug-in block with universal foot for mounting on NS 32 or NS 35 DIN rail
- Can be combined with the MSTB 2,5 range
- Well-known connection principle allows worldwide use

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1788143             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 1 pc                |
| Product key                          | AACMFC              |
| Catalog page                         | Page 361 (C-1-2013) |
| GTIN                                 | 4017918043209       |
| Weight per piece (including packing) | 19.398 g            |
| Weight per piece (excluding packing) | 18 g                |
| Customs tariff number                | 85366990            |
| Country of origin                    | DE                  |

# UMSTBVK 2,5/ 5-G-5,08 - DIN rail connector



1788143

<https://www.phoenixcontact.com/pc/products/1788143>

## Technical data

### Product properties

|                           |                       |
|---------------------------|-----------------------|
| Type                      | DIN rail mounting     |
| Product line              | COMBICON Connectors M |
| Product type              | DIN rail connector    |
| Product family            | UMSTBVK 2,5/..-G      |
| Number of positions       | 5                     |
| Pitch                     | 5.08 mm               |
| Number of connections     | 5                     |
| Number of rows            | 1                     |
| Mounting flange           | without               |
| Number of potentials      | 5                     |
| Solder pins per potential | 1                     |

### Electrical properties

|                             |       |
|-----------------------------|-------|
| Nominal current $I_N$       | 12 A  |
| Nominal voltage $U_N$       | 320 V |
| Degree of pollution         | 3     |
| Rated voltage (III/3)       | 320 V |
| Rated surge voltage (III/3) | 4 kV  |
| Rated voltage (III/2)       | 320 V |
| Rated surge voltage (III/2) | 4 kV  |
| Rated voltage (II/2)        | 630 V |
| Rated surge voltage (II/2)  | 4 kV  |

### Connection data

#### Connection technology

|                         |                     |
|-------------------------|---------------------|
| Type                    | DIN rail mounting   |
| Connector system        | COMBICON MSTB 2,5   |
| Nominal cross section   | 2.5 mm <sup>2</sup> |
| Contact connection type | Pin                 |

#### Interlock

|                 |         |
|-----------------|---------|
| Locking type    | without |
| Mounting flange | without |

#### Conductor connection

|                                                                |                                              |
|----------------------------------------------------------------|----------------------------------------------|
| Connection method                                              | Screw connection with tension sleeve         |
| Connection direction of the conductor to plug-in direction     | 0 °                                          |
| Conductor cross section rigid                                  | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible                               | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG                                    | 24 ... 12                                    |
| Conductor cross section flexible, with ferrule without plastic | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |

# UMSTBVK 2,5/ 5-G-5,08 - DIN rail connector



1788143

<https://www.phoenixcontact.com/pc/products/1788143>

|                                                                                           |                                              |
|-------------------------------------------------------------------------------------------|----------------------------------------------|
| sleeve                                                                                    |                                              |
| Conductor cross section, flexible, with ferrule, with plastic sleeve                      | 0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| 2 conductors with same cross section, solid                                               | 0.2 mm <sup>2</sup> ... 1 mm <sup>2</sup>    |
| 2 conductors with same cross section, flexible                                            | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm <sup>2</sup> ... 1 mm <sup>2</sup>   |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Cylindrical gauge a x b / diameter                                                        | 2.8 mm x 2.0 mm / 2.4 mm                     |
| Stripping length                                                                          | 7 mm                                         |
| Tightening torque                                                                         | 0.5 Nm ... 0.6 Nm                            |

## Mounting

|                       |                                      |
|-----------------------|--------------------------------------|
| Mounting type         | DIN rail                             |
| Drive form screw head | Slotted (L)                          |
| Connection method     | Screw connection with tension sleeve |
| Drive form screw head | Slotted (L)                          |

## Material specifications

### Material data - contact

|                                             |                                                                                  |
|---------------------------------------------|----------------------------------------------------------------------------------|
| Note                                        | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                            | Cu alloy                                                                         |
| Surface characteristics                     | Tin-plated                                                                       |
| Metal surface terminal point (top layer)    | Tin (5 - 7 µm Sn)                                                                |
| Metal surface terminal point (middle layer) | Nickel (2 - 3 µm Ni)                                                             |
| Metal surface contact area (top layer)      | Tin (5 - 7 µm Sn)                                                                |
| Metal surface contact area (middle layer)   | Nickel (2 - 3 µm Ni)                                                             |

### Material data - housing

|                                                                   |              |
|-------------------------------------------------------------------|--------------|
| Color (Housing)                                                   | green (6021) |
| Insulating material                                               | PA           |
| Insulating material group                                         | I            |
| CTI according to IEC 60112                                        | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |

## Notes

|                    |                                                                                                                                                                                          |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on operation | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


# UMSTBVK 2,5/ 5-G-5,08 - DIN rail connector



1788143

<https://www.phoenixcontact.com/pc/products/1788143>

## Dimensions

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Pitch               | 5.08 mm                                                                            |
| Width [w]           | 26.9 mm                                                                            |
| Height [h]          | 34.5 mm                                                                            |
| Length [l]          | 42.52 mm                                                                           |

## Electrical tests

### Air clearances and creepage distances |

|                                                        |                     |
|--------------------------------------------------------|---------------------|
| Specification                                          | IEC 60664-1:2007-04 |
| Insulating material group                              | I                   |
| Comparative tracking index (IEC 60112)                 | CTI 600             |
| Rated insulation voltage (III/3)                       | 320 V               |
| Rated surge voltage (III/3)                            | 4 kV                |
| minimum clearance value - non-homogenous field (III/3) | 3 mm                |
| minimum creepage distance (III/3)                      | 4 mm                |
| Rated insulation voltage (III/2)                       | 320 V               |
| Rated surge voltage (III/2)                            | 4 kV                |
| minimum clearance value - non-homogenous field (III/2) | 3 mm                |
| minimum creepage distance (III/2)                      | 3 mm                |
| Rated insulation voltage (II/2)                        | 630 V               |
| Rated surge voltage (II/2)                             | 4 kV                |
| minimum clearance value - non-homogenous field (II/2)  | 3 mm                |
| minimum creepage distance (II/2)                       | 3.2 mm              |

## Environmental and real-life conditions

### Ambient conditions

|                                         |                                                     |
|-----------------------------------------|-----------------------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                       |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |

## Packaging specifications

|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|

# UMSTBVK 2,5/ 5-G-5,08 - DIN rail connector


1788143

<https://www.phoenixcontact.com/pc/products/1788143>



## Drawings

Dimensional drawing

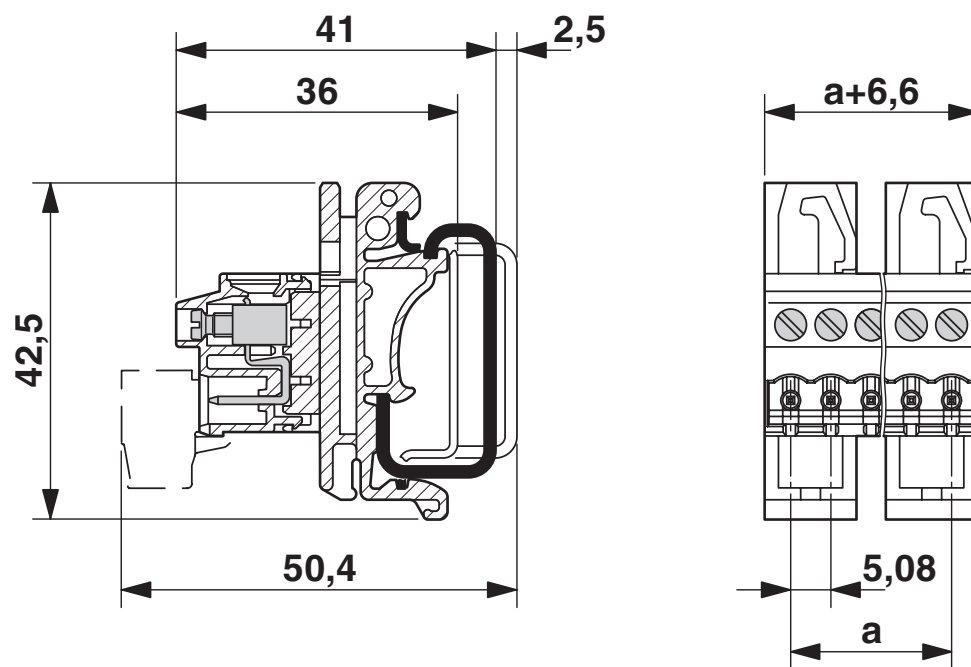

# UMSTBVK 2,5/ 5-G-5,08 - DIN rail connector



1788143

<https://www.phoenixcontact.com/pc/products/1788143>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1788143>

|  <b>CSA</b><br>Approval ID: 13631 |                       |                       |                   |                             |
|--------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                    | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                        |                       |                       |                   |                             |
|                                                                                                                    | 300 V                 | 10 A                  | 28 - 12           | -                           |
| Use group D                                                                                                        |                       |                       |                   |                             |
|                                                                                                                    | 300 V                 | 10 A                  | 28 - 12           | -                           |

|  <b>cULus Recognized</b><br>Approval ID: E60425-19931014 |                       |                       |                   |                             |
|-------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                           | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                               |                       |                       |                   |                             |
|                                                                                                                                           | 250 V                 | 12 A                  | 30 - 12           | -                           |
| Use group D                                                                                                                               |                       |                       |                   |                             |
|                                                                                                                                           | 300 V                 | 10 A                  | 30 - 12           | -                           |

|  <b>VDE Zeichengenehmigung</b><br>Approval ID: 40050694 |                       |                       |                   |                             |
|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                                                                                                            | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                            | 250 V                 | 12 A                  | -                 | 0.2 - 2.5                   |

# UMSTBVK 2,5/ 5-G-5,08 - DIN rail connector



1788143

<https://www.phoenixcontact.com/pc/products/1788143>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141106 |
| ECLASS-12.0 | 27141106 |
| ECLASS-13.0 | 27141106 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001284 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# UMSTBVK 2,5/ 5-G-5,08 - DIN rail connector



1788143

<https://www.phoenixcontact.com/pc/products/1788143>

## Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)