

1820932

https://www.phoenixcontact.com/nz/products/1820932

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Printed circuit board terminal, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm², number of potentials: 3, number of rows: 1, number of positions per row: 3, product range: PTSM 0,5/..-H-SMD WH, pitch: 2.5 mm, connection method: Push-in spring connection, mounting: SMD soldering, conductor/PCB connection direction: 0 °, color: signal white, Pin layout: Linear pad geometry, number of solder pins per potential: 1, type of packaging: packed in cardboard. SAMPLE set with 5 items in belt section. When used as part of soldering process, please use items without SAMPLE marking

Your advantages

- · White design: Stable color when welding and during use
- · Time saving push-in connection, tools not required
- · Defined contact force ensures that contact remains stable over the long term
- · High current carrying capacity of 6 A in very compact dimensions
- · Designed for integration into the SMT soldering process
- Additional solder anchors reduce the mechanical strain on the soldering spots

Commercial data

Item number	1820932
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	AACBBA
Product key	AAKDAB
GTIN	4046356787611
Weight per piece (including packing)	1.44 g
Weight per piece (excluding packing)	1.4 g
Country of origin	DE



1820932

https://www.phoenixcontact.com/nz/products/1820932

Technical data

Product properties

Product type	Printed circuit board terminal	
Product family	PTSM 0,5/H-SMD WH	
Product line	COMBICON Terminals XS	
Number of positions	3	
Pitch	2.5 mm	
Number of connections	3	
Number of rows	1	
Number of potentials	3	
Pin layout	Linear pad geometry	
Solder pins per potential	1	
Data management status		
Article revision	00	

Electrical properties

Nominal current I _N	6 A
Nominal voltage U _N	160 V
Rated voltage (III/3)	63 V
Rated surge voltage (III/3)	2.5 kV
Rated voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Rated voltage (II/2)	320 V
Rated surge voltage (II/2)	2.5 kV

Connection data

Connection technology

Nominal cross section	0.5 mm²
-----------------------	---------

Conductor connection	
Connection method	Push-in spring connection
Conductor cross section rigid	0.14 mm² 0.5 mm²
Conductor cross section flexible	0.2 mm ² 0.5 mm ² (up to 0.75 mm ² supported, with a stripping length of 7.5 mm and a rated insulation voltage of 32 V at III/2)
Conductor cross section AWG	26 20
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm² 0.5 mm²
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm ² 0.34 mm ² (possible from 0.14 mm ² , when using ferrule AI 0.14- 6 GY in combination with crimping pliers CRIMPFOX 10T-F)
Cylindrical gauge a x b / diameter	- / 1.2 mm
Stripping length	6 mm



1820932

https://www.phoenixcontact.com/nz/products/1820932

Mounting

Mounting type	SMD soldering			
Pin layout	Linear pad geometry			
Processing notes				
Process	Reflow soldering			
Moisture Sensitive Level	MSL 1			
Classification temperature T _c	260 °C			
Solder cycles in the reflow	3			

Material specifications

Material data - contact

Note	WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface characteristics	hot-dip tin-plated
Metal surface terminal point (top layer)	Tin (4 - 8 μm Sn)
Metal surface soldering area (top layer)	Tin (4 - 8 μm Sn)

Material data - housing

Color (Housing)	signal white (9003)
Insulating material	PA GF
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0

Dimensions

Dimensional drawing	h
Pitch	2.5 mm
Width [w]	11.9 mm
Height [h]	5.12 mm
Length [I]	11 mm
Installed height	5 mm
PCB design	
Pad geometry	1.4 x 3.4 mm
Pin spacing	2.5 mm

Mechanical tests



1820932

https://www.phoenixcontact.com/nz/products/1820932

minimum clearance value - non-homogenous field (III/3)

minimum clearance value - non-homogenous field (III/2)

minimum clearance value - non-homogenous field (II/2)

minimum creepage distance (III/3)

minimum creepage distance (III/2)

minimum creepage distance (II/2)

Rated insulation voltage (II/2)

Rated surge voltage (II/2)

Rated insulation voltage (III/2)

Rated surge voltage (III/2)

Specification	IEC 60998-2-2:2002-12
Result	Test passed
est for conductor damage and slackening	
Specification	IEC 60998-2-2:2002-12
Result	Test passed
Pull-out test	
Specification	IEC 60998-2-2:2002-12
Conductor cross section/conductor type/tractive force	0.14 mm² / solid / > 10 N
setpoint/actual value	0.2 mm² / flexible / > 10 N
	0.5 mm² / solid / > 20 N
	0.75 mm² / flexible / > 30 N
Elexion test	
Specification	IEC 60998-2-2:2002-12
Specification Result	IEC 60998-2-2:2002-12 Test passed
Result ctrical tests	
Result ctrical tests emperature-rise test	Test passed
Result ctrical tests femperature-rise test Specification	Test passed IEC 60998-2-1:2002-12
Result ctrical tests femperature-rise test Specification Requirement temperature-rise test	Test passed IEC 60998-2-1:2002-12
Result ctrical tests femperature-rise test Specification Requirement temperature-rise test insulation resistance	Test passed IEC 60998-2-1:2002-12 Increase in temperature ≤ 45 K
Result Octrical tests Temperature-rise test Specification Requirement temperature-rise test Insulation resistance Specification	Test passed IEC 60998-2-1:2002-12 Increase in temperature ≤ 45 K IEC 60998-1:2002-12
Result ctrical tests femperature-rise test Specification Requirement temperature-rise test insulation resistance Specification Insulation resistance, neighboring positions	Test passed IEC 60998-2-1:2002-12 Increase in temperature ≤ 45 K IEC 60998-1:2002-12
Result ctrical tests femperature-rise test Specification Requirement temperature-rise test insulation resistance Specification Insulation resistance, neighboring positions sir clearances and creepage distances	Test passed IEC 60998-2-1:2002-12 Increase in temperature ≤ 45 K IEC 60998-1:2002-12 > 5 MΩ
Result ctrical tests femperature-rise test Specification Requirement temperature-rise test nsulation resistance Specification Insulation resistance, neighboring positions sir clearances and creepage distances Specification	Test passed IEC 60998-2-1:2002-12 Increase in temperature ≤ 45 K IEC 60998-1:2002-12 > 5 MΩ IEC 60664-1:2007-04
Result ctrical tests femperature-rise test Specification Requirement temperature-rise test sullation resistance Specification Insulation resistance, neighboring positions sir clearances and creepage distances Specification Insulating material group	Test passed IEC 60998-2-1:2002-12 Increase in temperature ≤ 45 K IEC 60998-1:2002-12 > 5 MΩ IEC 60664-1:2007-04 I

1.5 mm

1.6 mm

160 V

2.5 kV

1.5 mm

1.5 mm

320 V

2.5 kV

1.5 mm

1.6 mm



1820932

https://www.phoenixcontact.com/nz/products/1820932

Environmental and real-life conditions

Type of packaging

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 Hz 60.1 Hz)
Acceleration	5g (60.1 Hz 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
ow-wire test Specification	IEC 60998-1:2002-12
Specification	IEC 60998-1:2002-12
Temperature	850 °C
Time of exposure	5 s
nbient conditions	
Ambient temperature (operation)	-40 °C 100 °C (Depending on the current carrying capacity/derating curve)
Ambient temperature (storage/transport)	-40 °C 70 °C
Relative humidity (storage/transport)	30 % 70 %
Relative numberly (Storage/transport)	

packed in cardboard





1820932

https://www.phoenixcontact.com/nz/products/1820932

Drawings

Dimensional drawing

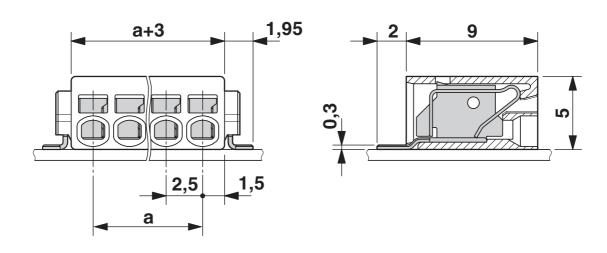

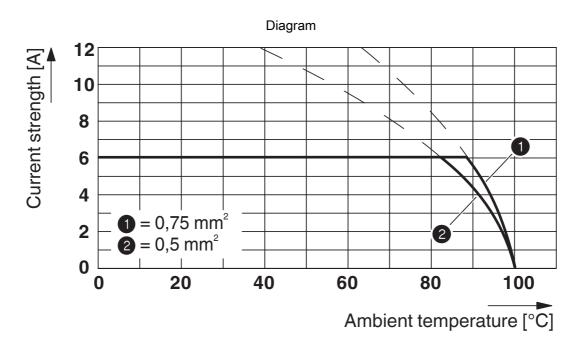


Type: PTSM 0,5/...-2,5-H SMD WH (L) R.. Tested in accordance with DIN EN 60512-5-2:2003-01 Reduction factor = 1 Number of positions: 5



1820932

https://www.phoenixcontact.com/nz/products/1820932

Drilling plan/solder pad geometry

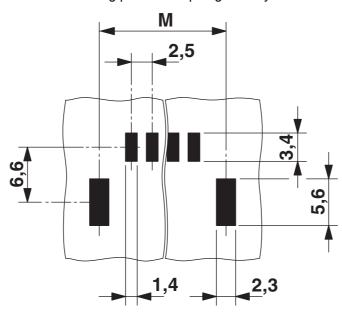



1820932

https://www.phoenixcontact.com/nz/products/1820932

Classifications

ECLASS

	ECLASS-11.0	27460101			
	ECLASS-12.0	27460101			
	ECLASS-13.0	27460101			
ΕT	ETIM				
	ETIM 9.0	EC002643			
UNSPSC					
	UNSPSC 21.0	39121400			



1820932

https://www.phoenixcontact.com/nz/products/1820932

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Unit 15C, 906-930 Great South Road, Penrose Auckland 1061 0508 474 636 sales@phoenixcontact.co.nz