

1820961

https://www.phoenixcontact.com/nz/products/1820961

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Printed circuit board terminal, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm², number of potentials: 6, number of rows: 1, number of positions per row: 6, product range: PTSM 0,5/..-H-SMD WH, pitch: 2.5 mm, connection method: Push-in spring connection, mounting: SMD soldering, conductor/PCB connection direction: 0 °, color: signal white, Pin layout: Linear pad geometry, number of solder pins per potential: 1, type of packaging: packed in cardboard. SAMPLE set with 5 items in belt section. When used as part of soldering process, please use items without SAMPLE marking

Your advantages

- · White design: Stable color when welding and during use
- · Time saving push-in connection, tools not required
- · Defined contact force ensures that contact remains stable over the long term
- · High current carrying capacity of 6 A in very compact dimensions
- · Designed for integration into the SMT soldering process
- Additional solder anchors reduce the mechanical strain on the soldering spots

Commercial data

Item number	1820961
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	AACBBA
Product key	AAKDAB
GTIN	4046356787642
Weight per piece (including packing)	1.98 g
Weight per piece (excluding packing)	1.92 g
Country of origin	DE



1820961

https://www.phoenixcontact.com/nz/products/1820961

Technical data

Product properties

Product type	Printed circuit board terminal
Product family	PTSM 0,5/H-SMD WH
Product line	COMBICON Terminals XS
Number of positions	6
Pitch	2.5 mm
Number of connections	6
Number of rows	1
Number of potentials	6
Pin layout	Linear pad geometry
Solder pins per potential	1
Data management status	
Article revision	00

Electrical properties

Nominal current I _N	6 A
Nominal voltage U _N	160 V
Rated voltage (III/3)	63 V
Rated surge voltage (III/3)	2.5 kV
Rated voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Rated voltage (II/2)	320 V
Rated surge voltage (II/2)	2.5 kV

Connection data

Connection technology

Nominal cross section	0.5 mm ²
Conductor connection	

Sonductor connection	
Connection method	Push-in spring connection
Conductor cross section rigid	0.14 mm² 0.5 mm²
Conductor cross section flexible	0.2 mm ² 0.5 mm ² (up to 0.75 mm ² supported, with a stripping length of 7.5 mm and a rated insulation voltage of 32 V at III/2)
Conductor cross section AWG	26 20
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm² 0.5 mm²
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm ² 0.34 mm ² (possible from 0.14 mm ² , when using ferrule AI 0.14- 6 GY in combination with crimping pliers CRIMPFOX 10T-F)
Cylindrical gauge a x b / diameter	- / 1.2 mm
Stripping length	6 mm



1820961

https://www.phoenixcontact.com/nz/products/1820961

Mounting

Mounting type	SMD soldering
Pin layout	Linear pad geometry
Processing notes	
Process	Reflow soldering
Moisture Sensitive Level	MSL 1
Classification temperature T _c	260 °C
Solder cycles in the reflow	3

Material specifications

Material data - contact

Note	WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface characteristics	hot-dip tin-plated
Metal surface terminal point (top layer)	Tin (4 - 8 μm Sn)
Metal surface soldering area (top layer)	Tin (4 - 8 μm Sn)

Material data - housing

Color (Housing)	signal white (9003)
Insulating material	PA GF
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0

Dimensions

Dimensional drawing	h
Pitch	2.5 mm
Width [w]	19.4 mm
Height [h]	5.12 mm
Length [I]	11 mm
Installed height	5 mm
PCB design	
Pad geometry	1.4 x 3.4 mm
Pin spacing	2.5 mm

Mechanical tests



1820961

https://www.phoenixcontact.com/nz/products/1820961

Connection test	
Specification	IEC 60998-2-2:2002-12
Result	Test passed
Test for conductor damage and slackening	
Specification	IEC 60998-2-2:2002-12
Result	Test passed
Pull-out test Specification	IEC 60998-2-2:2002-12
Conductor cross section/conductor type/tractive force	0.14 mm² / solid / > 10 N
setpoint/actual value	0.2 mm² / flexible / > 10 N
	0.5 mm² / solid / > 20 N
	0.75 mm² / flexible / > 30 N
Flexion test	
Specification	IEC 60998-2-2:2002-12
Result	Test passed

Electrical tests

Temperature-rise	test
------------------	------

Specification

Specification	IEC 60998-2-1:2002-12
Requirement temperature-rise test	Increase in temperature ≤ 45 K
Insulation resistance	

IEC 60998-1:2002-12

> 5 MΩ

Insulation resistance, neighboring positions

Air clearances and creepage distances				
IEC 60664-1:2007-04				
T .				
CTI 600				
63 V				
2.5 kV				
1.5 mm				
1.6 mm				
160 V				
2.5 kV				
1.5 mm				
1.5 mm				
320 V				
2.5 kV				
1.5 mm				
1.6 mm				



1820961

https://www.phoenixcontact.com/nz/products/1820961

Environmental and real-life conditions

pecification	IEC 60068-2-6:2007-12
equency	10 - 150 - 10 Hz
sweep speed	1 octave/min
Amplitude	0.35 mm (10 Hz 60.1 Hz)
Acceleration	5g (60.1 Hz 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
ow-wire test	
Specification	IEC 60998-1:2002-12
Temperature	850 °C
Time of exposure	5 s
nbient conditions	
Ambient temperature (operation)	-40 °C 100 °C (Depending on the current carrying capacity/derating curve)
Ambient temperature (storage/transport)	-40 °C 70 °C
Relative humidity (storage/transport)	30 % 70 %
Ambient temperature (assembly)	-5 °C 100 °C
· · · · · · · · · · · · · · · · · · ·	-5 °C 100 °C
ype of packaging	packed in cardboard
	•





1820961

https://www.phoenixcontact.com/nz/products/1820961

Drawings

Dimensional drawing

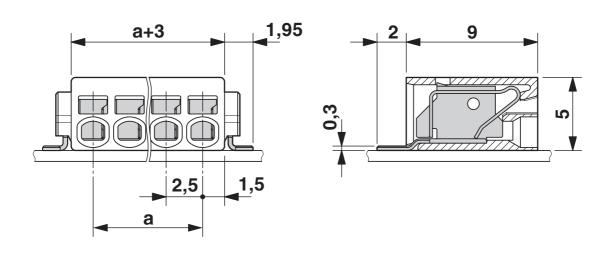

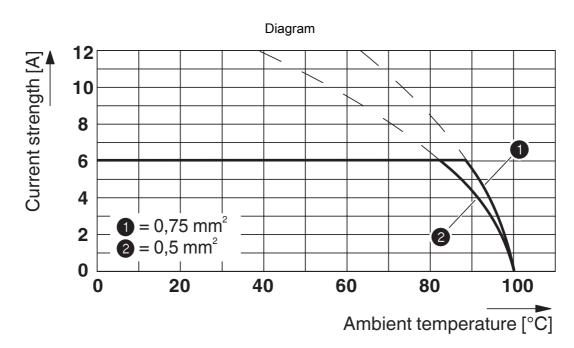


Type: PTSM 0,5/...-2,5-H SMD WH (L) R.. Tested in accordance with DIN EN 60512-5-2:2003-01 Reduction factor = 1 Number of positions: 5



1820961

https://www.phoenixcontact.com/nz/products/1820961

Drilling plan/solder pad geometry





1820961

https://www.phoenixcontact.com/nz/products/1820961

Classifications

ECLASS

	ECLASS-11.0	27460101		
	ECLASS-12.0	27460101		
	ECLASS-13.0	27460101		
ETIM				
	ETIM 9.0	EC002643		
UNSPSC				
	UNSPSC 21.0	39121400		



1820961

https://www.phoenixcontact.com/nz/products/1820961

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions			
China RoHS				
Environment friendly use period (EFUP)	EFUP-E			
	No hazardous substances above the limits			
EU REACH SVHC				
REACH candidate substance (CAS No.)	No substance above 0.1 wt%			

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Unit 15C, 906-930 Great South Road, Penrose Auckland 1061 0508 474 636 sales@phoenixcontact.co.nz