# SAMPLE PTSM 0,5/ 3-2,5-V SMDWH - PCB terminal block



#### 1821009

https://www.phoenixcontact.com/pc/products/1821009

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Printed circuit board terminal, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of potentials: 3, number of rows: 1, number of positions per row: 3, product range: PTSM 0,5/..-V-SMD WH, pitch: 2.5 mm, connection method: Push-in spring connection, mounting: SMD soldering, conductor/PCB connection direction: 90 °, color: signal white, Pin layout: Linear pinning, Solder pin [P]: 2 mm, number of solder pins per potential: 1, type of packaging: packed in cardboard. SAMPLE set with 5 items in belt section. When used as part of soldering process, please use items without SAMPLE marking

# Your advantages

- · White design: Stable color when welding and during use
- · Time saving push-in connection, tools not required
- · Defined contact force ensures that contact remains stable over the long term
- · High current carrying capacity of 6 A in very compact dimensions
- Designed for integration into the SMT soldering process
- · Vertical connection enables multi-row arrangement on the PCB
- · Additional solder anchors reduce the mechanical strain on the soldering spots

# Commercial data

Item number	1821009
Packing unit	5 pc
Minimum order quantity	5 pc
Product key	AAKDAD
GTIN	4046356787697
Weight per piece (including packing)	1.61 g
Weight per piece (excluding packing)	1.61 g
Customs tariff number	85369010
Country of origin	DE



https://www.phoenixcontact.com/pc/products/1821009

# Technical data

## **Product properties**

Product type	Printed circuit board terminal
Product family	PTSM 0,5/V-SMD WH
Product line	COMBICON Terminals XS
Number of positions	3
Pitch	2.5 mm
Number of connections	3
Number of rows	1
Number of potentials	3
Pin layout	Linear pinning
Solder pins per potential	1
Data management status	
Article revision	00

#### **Electrical properties**

Nominal current I <sub>N</sub>	6 A
Nominal voltage U <sub>N</sub>	160 V
Rated voltage (III/3)	63 V
Rated surge voltage (III/3)	2.5 kV
Rated voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
Rated voltage (II/2)	320 V
Rated surge voltage (II/2)	2.5 kV

## Connection data

Connection technology	
Nominal cross section	0.5 mm <sup>2</sup>
Conductor connection	
Connection method	Push-in spring connection
Conductor cross section rigid	0.14 mm <sup>2</sup> 0.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> 0.5 mm <sup>2</sup> (up to 0.75 mm <sup>2</sup> supported, with a stripping length of 7.5 mm and a rated insulation voltage of 32 V at III/2)
Conductor cross section AWG	26 20
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm² 0.5 mm²
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm <sup>2</sup> 0.34 mm <sup>2</sup> (possible from 0.14 mm <sup>2</sup> , when using ferrule AI 0.14- 6 GY in combination with crimping pliers CRIMPFOX 10T-F)
Cylindrical gauge a x b / diameter	- / 1.2 mm
Stripping length	6 mm



https://www.phoenixcontact.com/pc/products/1821009

## Mounting

Mounting type	SMD soldering
Pin layout	Linear pinning
Processing notes	
Process	Reflow soldering
Moisture Sensitive Level	MSL 1
Classification temperature $T_c$	260 °C
Solder cycles in the reflow	3

## Material specifications

Material data - contact

Note	WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface characteristics	hot-dip tin-plated
Metal surface terminal point (top layer)	Tin (4 - 8 μm Sn)
Metal surface soldering area (top layer)	Tin (4 - 8 μm Sn)
Material data - housing	
Color (Housing)	signal white (9003)
Insulating material	PA GF
Insulating material group	1
CTI according to IEC 60112	600
Flammability rating according to UL 94	VO

#### Notes

Note on application	Pick and place pads may protrude beyond the components. The
	PCB layout must ensure that collisions are avoided when
	components are assembled.

## Dimensions

Dimensional drawing	h p p
Pitch	2.5 mm
Width [w]	12.6 mm
Height [h]	9 mm
Length [I]	7 mm
Installed height	9 mm
Solder pin length [P]	2 mm

PCB design



https://www.phoenixcontact.com/pc/products/1821009

Pad geometry	1.4 x 3.4 mm
Pin spacing	2.5 mm

## Mechanical tests

Connection test	
Specification	IEC 60998-2-2:2002-12
Result	Test passed
Test for conductor damage and slackening	
Specification	IEC 60998-2-2:2002-12
Result	Test passed
Pull-out test	
Specification	IEC 60998-2-2:2002-12
Conductor cross section/conductor type/tractive force	0.14 mm² / solid / > 10 N
setpoint/actual value	0.2 mm² / flexible / > 10 N
	0.5 mm² / solid / > 20 N
	0.75 mm² / flexible / > 30 N
Flexion test	
Specification	IEC 60998-2-2:2002-12
Result	Test passed

### Electrical tests

Temperature-rise test	
Specification	IEC 60998-2-1:2002-12
Requirement temperature-rise test	Increase in temperature ≤ 45 K
Insulation resistance	
Specification	IEC 60998-1:2002-12
Insulation resistance, neighboring positions	> 5 MΩ
Air clearances and creepage distances	
Specification	IEC 60664-1:2007-04
Insulating material group	1
Comparative tracking index (IEC 60112)	CTI 600
Rated insulation voltage (III/3)	63 V
Rated surge voltage (III/3)	2.5 kV
minimum clearance value - non-homogenous field (III/3)	1.5 mm
minimum creepage distance (III/3)	1.6 mm
Rated insulation voltage (III/2)	160 V
Rated surge voltage (III/2)	2.5 kV
minimum clearance value - non-homogenous field (III/2)	1.5 mm
minimum creepage distance (III/2)	1.5 mm
Rated insulation voltage (II/2)	320 V



https://www.phoenixcontact.com/pc/products/1821009

Rated surge voltage (II/2)	2.5 kV
minimum clearance value - non-homogenous field (II/2)	1.5 mm
minimum creepage distance (II/2)	1.6 mm

#### Environmental and real-life conditions

n the current carrying

# SAMPLE PTSM 0,5/ 3-2,5-V SMDWH - PCB terminal block




1821009


https://www.phoenixcontact.com/pc/products/1821009

# Drawings



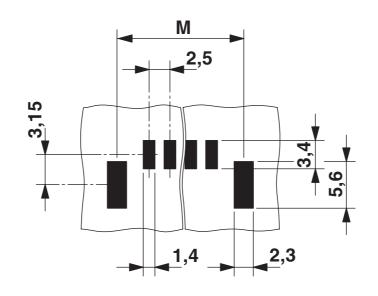



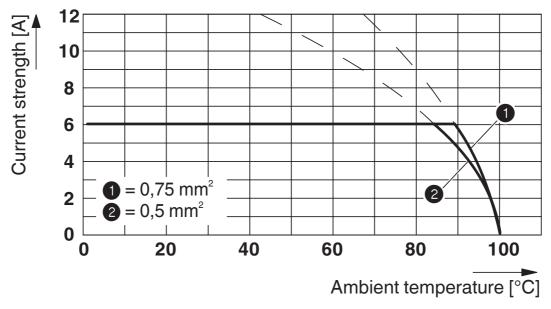

Type: PTSM 0,5/...-2,5-V SMD WH R44 Tested in accordance with DIN EN 60512-5-2:2003-01 Reduction factor = 1 Number of positions: 5


# SAMPLE PTSM 0,5/ 3-2,5-V SMDWH - PCB terminal block




1821009

https://www.phoenixcontact.com/pc/products/1821009

Dimensional drawing

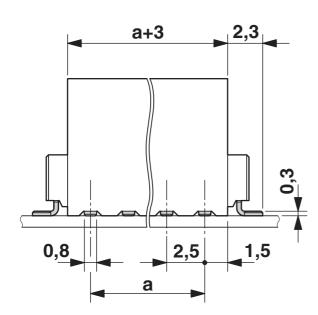

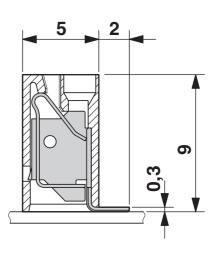



https://www.phoenixcontact.com/pc/products/1821009

# Classifications

## ECLASS

	ECLASS-11.0	27460101		
	ECLASS-13.0	27460101		
ETIM				
	ETIM 8.0	EC002643		
UNSPSC				
	UNSPSC 21.0	39121400		



https://www.phoenixcontact.com/pc/products/1821009

# Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions		
China RoHS			
Environment friendly use period (EFUP)	EFUP-E		
	No hazardous substances above the limits		
EU REACH SVHC			
REACH candidate substance (CAS No.)	No substance above 0.1 wt%		

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com