1834437

https://www.phoenixcontact.com/ca/products/1834437

PHŒNIX CONTACT

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable housing, product range: KGG-MC 1,5, width: 14.5 mm

Commercial data

Item number	1834437
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AA08
Product key	AAHZDB
Catalog page	Page 243 (C-1-2013)
GTIN	4017918110772
Weight per piece (including packing)	11.07 g
Weight per piece (excluding packing)	11.06 g
Customs tariff number	39269097
Country of origin	PL

1834437

https://www.phoenixcontact.com/ca/products/1834437



Technical data


Product properties


Product type	Cable housing
Product family	KGG-MC 1,5
Number of positions	11
Pitch	3.81 mm
Data management status	
Article revision	04
laterial specifications	
Flammability rating according to UL 94	НВ
imensions	
Dimensional drawing	
Width	14.5 mm
Height	45.6 mm
Pitch	3.81 mm

1834437

https://www.phoenixcontact.com/ca/products/1834437

Drawings

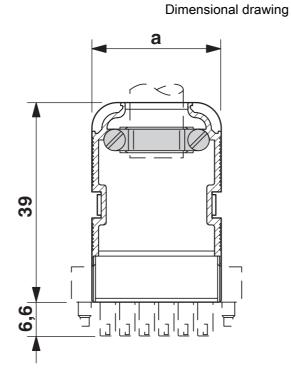





1834437

https://www.phoenixcontact.com/ca/products/1834437



Classifications

ECLASS

ECLASS-11.0	27460402
ECLASS-13.0	27460402
ECLASS-12.0	27460402

ETIM

ETIM 9.0	EC002943
UNSPSC	
UNSPSC 21.0	39121400

1834437

https://www.phoenixcontact.com/ca/products/1834437



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

1834437

https://www.phoenixcontact.com/ca/products/1834437



Accessories

SBS10:UNBEDRUCKT - Marker card

1007248

https://www.phoenixcontact.com/ca/products/1007248

Marker card, Card, white, unlabeled, can be labeled with: Marker pen, perforated, mounting type: snapped, snap into flat marker groove, for terminal block width: 10 mm, lettering field size: 6 x 10.1 mm, Number of individual labels: 250

KGG-MC 1,5/ DST - Marking material

1839050 https://www.phoenixcontact.com/ca/products/1839050

Transparent label carrier, can be marked with marker strips SBS 10



1834437

https://www.phoenixcontact.com/ca/products/1834437



CUC-DST-ABK-CP7,5 - Bend protection sleeve

1419794

https://www.phoenixcontact.com/ca/products/1419794



Bend protection sleeve, degree of protection: IP20, color: black

CUC-DST-ABK-CP9 - Bend protection sleeve

1419792 https://www.phoenixcontact.com/ca/products/1419792



Bend protection sleeve, degree of protection: IP20, color: black

1834437

https://www.phoenixcontact.com/ca/products/1834437



CUC-DST-ABK-CP9,7 - Bend protection sleeve

1419793

https://www.phoenixcontact.com/ca/products/1419793



Bend protection sleeve, degree of protection: IP20, color: black

MC 1,5/11-ST-3,81 - PCB connector

1803662 https://www.phoenixcontact.com/ca/products/1803662



PCB connector, nominal cross section: 1.5 mm^2 , color: green, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 11, number of rows: 1, number of positions: 11, number of connections: 11, product range: MC 1,5/..-ST, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0°, plug-in system: COMBICON MC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard

1834437

https://www.phoenixcontact.com/ca/products/1834437



MC 1,5/11-STF-3,81 - PCB connector

1827790

https://www.phoenixcontact.com/ca/products/1827790



PCB connector, nominal cross section: 1.5 mm², color: green, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Socket, number of potentials: 11, number of rows: 1, number of positions: 11, number of connections: 11, product range: MC 1,5/..-STF, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, plug-in system: COMBICON MC 1,5, locking: Screw locking mechanism, mounting: Screw flange, type of packaging: packed in cardboard

IMC 1,5/11-ST-3,81 - PCB connector

1857977 https://www.phoenixcontact.com/ca/products/1857977



PCB connector, nominal cross section: 1.5 mm², color: green, nominal current: 8 A, rated voltage (III/2): 160 V, contact surface: Sn, contact connection type: Pin, number of potentials: 11, number of rows: 1, number of positions: 11, number of connections: 11, product range: IMC 1,5/..-ST, pitch: 3.81 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, plug-in system: COMBICON MC 1,5, locking: without, mounting: without, type of packaging: packed in cardboard

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd 8240 Parkhill Drive Milton, Ontario L9T 5V7 1-800-890-2820 cdinfo@phoenixcontact.ca