

VC-MEMV-T4-Z - Sleeve housing



1853353

<https://www.phoenixcontact.com/us/products/1853353>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing, Range of articles: VARIOCON, design: VC4, housing material: Zinc die-cast, color: nickel

Commercial data

Item number	1853353
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	AB01
Product key	ABLAAB
Catalog page	Page 369 (PC-2009)
GTIN	4017918133429
Weight per piece (including packing)	372.18 g
Weight per piece (excluding packing)	371.98 g
Customs tariff number	85389099
Country of origin	PL

Technical data

Notes

Safety note

Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- **WARNING:** Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.

- **WARNING:** Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.

- The products are suitable for applications in plant, controller, and electrical device engineering.

- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.

- Assembled products may not be manipulated or improperly opened.

- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)).

- When using the product in direct connection with third-party manufacturers, the user is responsible.

- For operating voltages > 50 V AC, conductive connector housings must be grounded

- Ensure that the protective or functional ground has been properly connected.

- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector

- Observe the corresponding technical data. You will find information:
 - o On the product
 - o On the packing label
 - o In the supplied documentation
 - o Online at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) under the product

- Only use tools recommended by Phoenix Contact

- The installation notes/Design In documents online on the download page at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) must be observed for this product.

- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)

- Operate the connector only when it is fully plugged in.

- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the

VC-MEMV-T4-Z - Sleeve housing



1853353

<https://www.phoenixcontact.com/us/products/1853353>

standards.

- Observe the minimum bending radius of the cable. Lay the cable without twisting it.
- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).


Product properties

Product type	Sleeve housings
Product family	VARIOCON
Type	VC4
No. of cable outlets	1
Type of the screw connection	Pg21
Shielded	yes
Cable outlet	angled

Connection data

Tightening torque	1.2 ... 1.8 Nm
-------------------	----------------

Dimensions

Dimensional drawing	
Width	33 mm
Height	75 mm
Length	111 mm
Thread type on seal side	Pg21

Material specifications

Color	nickel
Color of the housing part	gray
Material	Die-cast zinc
	NBR
Flammability rating according to UL 94	V0
Seal material	EPDM, conductive
Housing material	Zinc die-cast
O-ring material	NBR
Material of locking screw	Stainless steel

Mechanical properties

Mechanical data

Type of the screw connection	Pg21
Locking type	Screw

VC-MEMV-T4-Z - Sleeve housing



1853353

<https://www.phoenixcontact.com/us/products/1853353>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67 (IEC 60529)
	IP65/IP66/IP67
Ambient temperature (operation)	-40 °C ... 125 °C

VC-MEMV-T4-Z - Sleeve housing


1853353

<https://www.phoenixcontact.com/us/products/1853353>




Drawings

Dimensional drawing

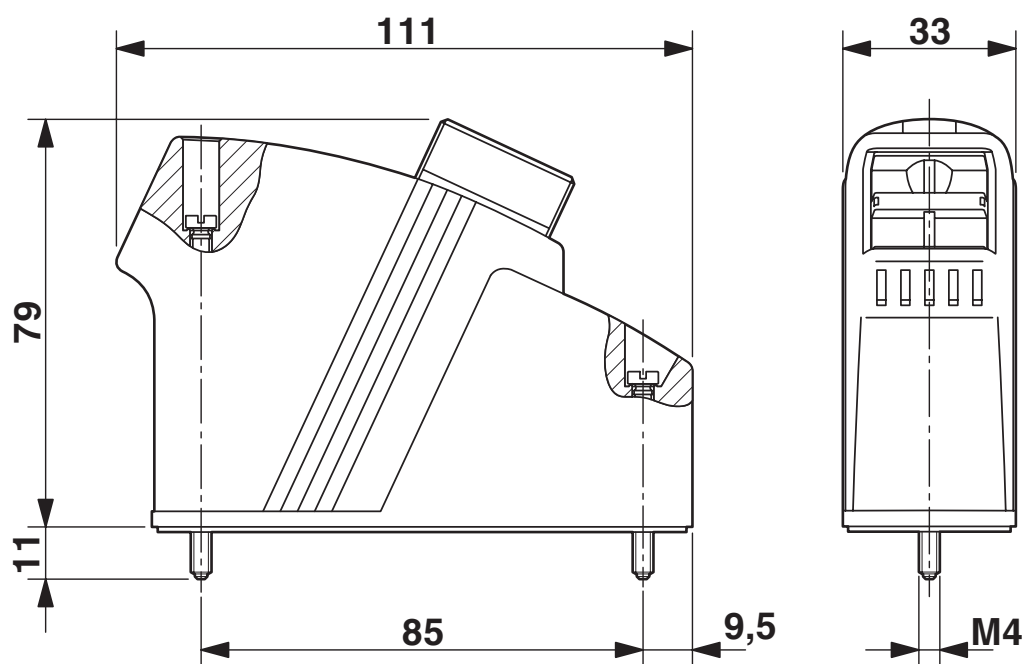

Dimensional drawing

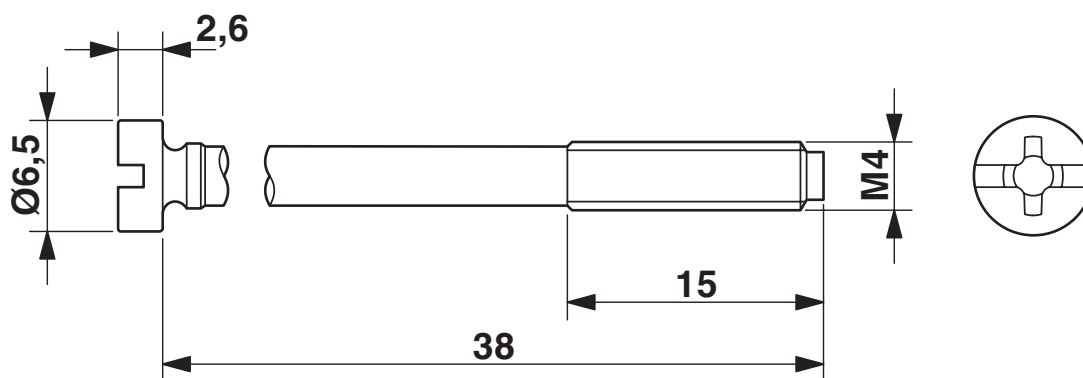


VC-MEMV-T4-Z - Sleeve housing

1853353

<https://www.phoenixcontact.com/us/products/1853353>



Dimensional drawing

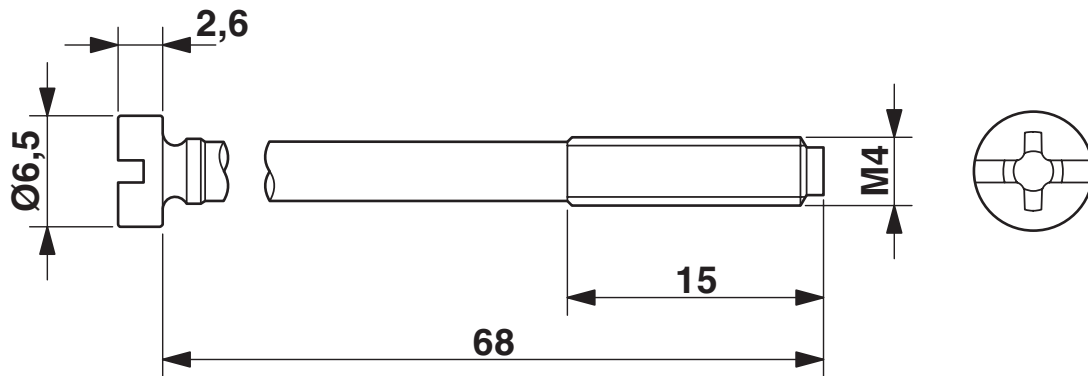


VC-MEMV-T4-Z - Sleeve housing



1853353

<https://www.phoenixcontact.com/us/products/1853353>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1853353>



cUL Recognized
Approval ID: FILE E 118976



UL Recognized
Approval ID: FILE E 118976

cULus Recognized

VC-MEMV-T4-Z - Sleeve housing



1853353

<https://www.phoenixcontact.com/us/products/1853353>

Classifications

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

ETIM

ETIM 9.0	EC000437
----------	----------

UNSPSC

UNSPSC 21.0	31261500
-------------	----------

VC-MEMV-T4-Z - Sleeve housing

1853353

<https://www.phoenixcontact.com/us/products/1853353>



Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VC-MEMV-T4-Z - Sleeve housing

1853353

<https://www.phoenixcontact.com/us/products/1853353>



Accessories

VC-EMV-KV-PG21(9-13/ 9,5) - Cable gland

1854200

<https://www.phoenixcontact.com/us/products/1854200>



EMC half screw connection Pg21, for metal housings of sizes 2-4, consisting of rubber seal, iris spring, cone disks and pressure screw, for size 1 housings, cable shielding range [mm] 5.5-9.5, cable [mm] 9-13

VC-EMV-KV-PG21(9-13/12) - Cable gland

1854213

<https://www.phoenixcontact.com/us/products/1854213>



EMC half screw connection Pg21, for metal housings of sizes 2-4, consisting of rubber seal, iris spring, cone disks and pressure screw, for size 1 housings, cable shielding range [mm] 7.5-12, cable [mm] 9-13

VC-MEMV-T4-Z - Sleeve housing

1853353

<https://www.phoenixcontact.com/us/products/1853353>



VC-EMV-KV-PG21(11,5-15,5/13,5) - Cable gland

1854242

<https://www.phoenixcontact.com/us/products/1854242>



Pg21 EMC half screw connection, for size 2 - 4 metal housing, comprising rubber seal, iris spring, cone discs, and pressure screw, for size 1 housing, cable shielding clamping area: 9.5 - 13.5 [mm], cable: 11.5 - 15.5 [mm]

VC-EMV-KV-PG21(14-18/14,5) - Cable gland

1854255

<https://www.phoenixcontact.com/us/products/1854255>



EMC half screw connection Pg21, for metal housings of sizes 2-4, consisting of rubber seal, iris spring, cone disks and pressure screw, for size 1 housings, cable shielding range [mm] 10.5 - 14.5, cable [mm] 14-18

VC-MEMV-T4-Z - Sleeve housing

1853353

<https://www.phoenixcontact.com/us/products/1853353>



VC-SCHR.ZYL-B-M4X38X15-Z2L-V4A - Connector component

1628354

<https://www.phoenixcontact.com/us/products/1628354>



M4x38x15 mm cylinder screw as replacement for VC sleeve housing

VC-SCHR.ZYL-B-M4X68X15-Z2L-V4A - Connector component

1628355

<https://www.phoenixcontact.com/us/products/1628355>



M4x68x15 mm cylinder screw as replacement for VC sleeve housing

VC-MEMV-T4-Z - Sleeve housing

1853353

<https://www.phoenixcontact.com/us/products/1853353>



VC-O-RING 3X1,5 NBR-NT70:100 - Connector component

1628356

<https://www.phoenixcontact.com/us/products/1628356>

O-ring as replacement for VC sleeve housing



VC-SD4 - Protective cover

1853706

<https://www.phoenixcontact.com/us/products/1853706>

Protective cover, Range of articles: VARIOCON, design: VC4, housing material: PA 6, color: gray



VC-MEMV-T4-Z - Sleeve housing

1853353

<https://www.phoenixcontact.com/us/products/1853353>



VC-SD-T4 - Protective cover

1886757

<https://www.phoenixcontact.com/us/products/1886757>

Protective cover, design: VC4, housing material: PA 6, color: gray



VC-BZS WH - Marking label

1852875

<https://www.phoenixcontact.com/us/products/1852875>

Marker labels, unprinted, 5-section, for individual labeling with M-PEN or CMS system, white



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com