

https://www.phoenixcontact.com/us/products/1884733



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Housing, Range of articles: VARIOCON, design: VC2, housing material: Zinc die-cast, color: gray, When using fiber optics, the bending radii of the cable manufacturers must be observed.

Commercial data

Item number	1884733
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	AB01
Product key	ABLADB
Catalog page	Page 31 (C-2-2013)
GTIN	4017918164768
Weight per piece (including packing)	446.14 g
Weight per piece (excluding packing)	446.14 g
Customs tariff number	85389099
Country of origin	PL

1884733

https://www.phoenixcontact.com/us/products/1884733



Technical data

Notes

General

When using fiber optics, the bending radii of the cable manufacturers must be observed.

Safety note

WARNING: The connectors may not be plugged in or disconnected under lead. Inversing or improper uses

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
 The products must be regularly inspected for damage.
 Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that the protective or functional ground has been properly connected.
- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- Only use tools recommended by Phoenix Contact
- The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
- Operate the connector only when it is fully plugged in.



https://www.phoenixcontact.com/us/products/1884733



 Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
 Observe the minimum bending radius of the cable. Lay the cable without twisting it.
 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Product properties

Product type	Panel mounting base
Product family	VARIOCON
Туре	VC2
No. of cable outlets	1
Number of module slots	3
Type of the screw connection	Pg21
Shielded	no
Cable outlet	lateral

Dimensions

Dimensional drawing	
Width	36.4 mm
Height	55 mm
Length	77.6 mm
Thread type on seal side	Pg21

Material specifications

Color	gray
Color of the housing part	gray
Material	Die-cast zinc
Seal material	EPDM
Housing material	Zinc die-cast
O-ring material	NBR

Mechanical properties

Mechanical data

Type of the screw connection	Pg21
Locking type	Nut

Environmental and real-life conditions

Ambient conditions



https://www.phoenixcontact.com/us/products/1884733



Degree of protection	IP65/IP66/IP67
Ambient temperature (operation)	-40 °C 125 °C


1884733

https://www.phoenixcontact.com/us/products/1884733



Drawings

Dimensional drawing

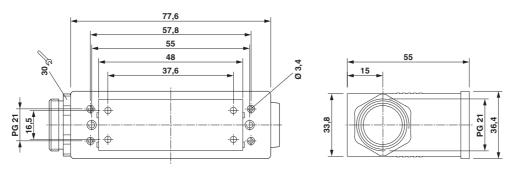



https://www.phoenixcontact.com/us/products/1884733



Classifications

UNSPSC 21.0

ECLASS

	ECLASS-11.0	27440202
	ECLASS-12.0	27440202
	ECLASS-13.0	27440202
ETIM		
	ETIM 9.0	EC000437
UN	SPSC	

31261500



https://www.phoenixcontact.com/us/products/1884733



Environmental product compliance

EU R	oHS
------	-----

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



https://www.phoenixcontact.com/us/products/1884733



Accessories

VC-BZS WH - Marking label

1852875

https://www.phoenixcontact.com/us/products/1852875



Marker labels, unprinted, 5-section, for individual labeling with M-PEN or CMS system, white

VC-M-KV-PG21(7-10,5) - Half screw connection

1853997

https://www.phoenixcontact.com/us/products/1853997



Half screw connection Pg21, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 7 - 10.5



https://www.phoenixcontact.com/us/products/1884733



VC-M-KV-PG21(9-13) - Half screw connection

1854006

https://www.phoenixcontact.com/us/products/1854006



Half screw connection Pg21, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 9 - 13

VC-M-KV-PG21(11,5-15,5) - Half screw connection

1854035

https://www.phoenixcontact.com/us/products/1854035



Half screw connection Pg21, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 11.5 - 13.5



https://www.phoenixcontact.com/us/products/1884733



VC-M-KV-PG21(14-18) - Half screw connection

1854048

https://www.phoenixcontact.com/us/products/1854048



Half screw connection Pg21, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 14 - 18

VC-M-KV-PG21(17-20,5) - Half screw connection

1854051

https://www.phoenixcontact.com/us/products/1854051



Half screw connection Pg21, made of metal, consisting of rubber seal with one hole and one pressure screw, for type 2 - 4 housings, cable [mm] 17 - 20.5



https://www.phoenixcontact.com/us/products/1884733



VC-M-KV-PG21(20X 7) - Cable gland

1885305

https://www.phoenixcontact.com/us/products/1885305



Single screw connection Pg21, made of metal, consisting of rubber seal with a long hole and pressure screw, for type 2-4 housings, cable [mm] 20 x 7 mm (for flat-ribbon cable)

VC-M-KV-PG21 1X6/2X9 - Cable gland

1885619

https://www.phoenixcontact.com/us/products/1885619



Multiple screw connection Pg21, made of metal, consisting of rubber seal with several holes (1 x 6 mm/2 x 9 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG21...



https://www.phoenixcontact.com/us/products/1884733



VC-M-KV-PG21- 1X8,5/1X12 - Half screw connection

1854970

https://www.phoenixcontact.com/us/products/1854970



Half screw connection Pg21, made of metal, consisting of rubber seal with several holes (1 x $8.5 \text{ mm/1} \times 12 \text{ mm}$) and one pressure screw, for type 2 - 4 housings

VC-M-KV-PG21 2X6/2X8 - Cable gland

1885635

https://www.phoenixcontact.com/us/products/1885635



Multiple screw connection Pg21, made of metal, consisting of rubber seal with several holes (2 x 6 mm/2 x 8 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG21...



https://www.phoenixcontact.com/us/products/1884733



VC-M-KV-PG21 2X7,2/1X10,5 - Cable gland

1885648

https://www.phoenixcontact.com/us/products/1885648



Multiple screw connection Pg21, made of metal, consisting of rubber seal with several holes (2 x 7.2 mm/1 x 10.5 mm) and a pressure screw, for cable screw connection thread VC-M-KV-PG21...

VC-M-KV-PG21 3X7 - Cable gland

1885651

https://www.phoenixcontact.com/us/products/1885651



Multiple screw connection Pg21, made of metal, consisting of rubber seal with several holes (3 x 7 mm) and a pressure screw, for cable screw connection thread VC-M-KV-PG21...



https://www.phoenixcontact.com/us/products/1884733



VC-M-KV-PG21 3X9 - Cable gland

1885664

https://www.phoenixcontact.com/us/products/1885664



Multiple screw connection Pg21, made of metal, consisting of rubber seal with several holes (3 \times 8 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG21...

VC-M-KV-PG21 4X6,5 - Cable gland

1885677

https://www.phoenixcontact.com/us/products/1885677



Multiple screw connection Pg21, made of metal, consisting of rubber seal with several holes (4 x 6.5 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG21...

1884733

https://www.phoenixcontact.com/us/products/1884733



VC-M-KV-PG21 4X8 - Cable gland

1885680

https://www.phoenixcontact.com/us/products/1885680



Multiple screw connection Pg21, made of metal, consisting of rubber seal with several holes (4 x 8 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG21...

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com