

## Printed-circuit board connector - FKIC 2,5/ 2-ST-5,08-RN - 1925867

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB connector, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5.08 mm, connection method: Push-in spring connection, color: green, contact surface: Tin, Article with engagement nose

The figure shows a 10-position version of the product

### Why buy this product

- ✓ Time saving push-in connection, tools not required
- ✓ Intuitive use through colour coded actuation lever
- ✓ Inverted connector with pin contacts for touch-proof device outputs or free-hanging cable/cable connections
- ✓ Intuitive locking mechanism prevents accidental disconnection
- ✓ Can be combined with the MSTB 2,5 range



### Key Commercial Data

|              |               |
|--------------|---------------|
| Packing unit | 100 STK       |
| GTIN         |               |
| GTIN         | 4017918819927 |

### Technical data

#### Dimensions

|              |          |
|--------------|----------|
| Length [ l ] | 27 mm    |
| Width [ w ]  | 12.16 mm |
| Height [ h ] | 15 mm    |
| Pitch        | 5.08 mm  |
| Dimension a  | 5.08 mm  |

#### General

|                     |                           |
|---------------------|---------------------------|
| Range of articles   | FKIC 2,5/...-ST-RN        |
| Type of contact     | Male connector            |
| Number of positions | 2                         |
| Connection method   | Push-in spring connection |

# Printed-circuit board connector - FKIC 2,5/ 2-ST-5,08-RN - 1925867

## Technical data

### General

|                                        |                     |
|----------------------------------------|---------------------|
| Insulating material group              | I                   |
| Rated surge voltage (III/3)            | 4 kV                |
| Rated surge voltage (III/2)            | 4 kV                |
| Rated surge voltage (II/2)             | 4 kV                |
| Rated voltage (III/3)                  | 320 V               |
| Rated voltage (III/2)                  | 320 V               |
| Rated voltage (II/2)                   | 630 V               |
| Connection in acc. with standard       | EN-VDE              |
| Nominal current $I_N$                  | 12 A                |
| Nominal cross section                  | 2.5 mm <sup>2</sup> |
| Maximum load current                   | 12 A                |
| Insulating material                    | PA                  |
| Flammability rating according to UL 94 | V0                  |
| Internal cylindrical gage              | A2                  |
| Stripping length                       | 10 mm               |

### Connection data

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.                                                      | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                                                   | 0.2 mm <sup>2</sup>  |
| Conductor cross section flexible max.                                                   | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule without plastic sleeve min.              | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max.              | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                 | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                 | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.                                                        | 24                   |
| Conductor cross section AWG max.                                                        | 12                   |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1.5 mm <sup>2</sup>  |
| Minimum AWG according to UL/CUL                                                         | 26                   |
| Maximum AWG according to UL/CUL                                                         | 12                   |

### General information

|      |                                                                                                                                                                                          |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CUL    |
| Flammability rating according to UL 94 | V0     |

# Printed-circuit board connector - FKIC 2,5/ 2-ST-5,08-RN - 1925867


## Technical data

### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

Dimensional drawing

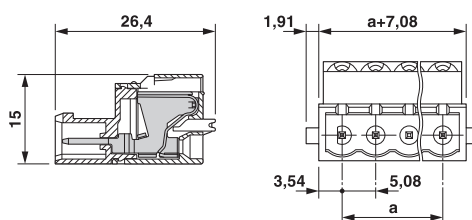

## Approvals

### Approvals

#### Approvals

VDE Gutachten mit Fertigungsüberwachung / IECCE CB Scheme / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                                            |                                                                                     |                                                                                                                                                                                                                |          |
|--------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40004701 |
| Nominal voltage UN                         | 250 V                                                                               |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 12 A                                                                                |                                                                                                                                                                                                                |          |
| mm²/AWG/kcmil                              | 0.2-2.5                                                                             |                                                                                                                                                                                                                |          |

|                    |                                                                                     |                                                           |                |
|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-58978-B1B2 |
| Nominal voltage UN | 250 V                                                                               |                                                           |                |
| Nominal current IN | 12 A                                                                                |                                                           |                |

## Printed-circuit board connector - FKIC 2,5/ 2-ST-5,08-RN - 1925867

### Approvals

|               |         |
|---------------|---------|
|               |         |
| mm²/AWG/kcmil | 0.2-2.5 |

|     |                                                                                   |         |
|-----|-----------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-----------------------------------------------------------------------------------|---------|

|                    |                                                                                   |                                                                                                                                                       |                 |
|--------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19931011 |
|                    | D                                                                                 | B                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                             | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 10 A                                                                              | 10 A                                                                                                                                                  |                 |
| mm²/AWG/kcmil      | 26-12                                                                             | 26-12                                                                                                                                                 |                 |

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>